

THE DECLINATION OF THE COMPASS NEEDLE 1954

Produced by the Surveys and Mapping Branch, Department of Mines and Technical Surveys, 1954, from air photographs taken in 1949. Printed by the Army Survey Establishment, R.C.E., Department of National Defence, 1954.

Universal Transverse Mercator Projection


All Elevations in Feet above Mean Sea Level
Contour Interval 500 Feet
North American Datum, 1922

Copies may be obtained from the Map Distribution Office, Department of Mines and Technical Surveys, Ottawa.

WIND RIVER

YUKON TERRITORY

Scale 1:250,000
1 Inch to 4 Miles Approximately




REFERENCE

- Wagon or Winter Road
- Trail or Portage
- Village or Settlement
- Post Office
- Building or Cabin
- Horizontal Control Point
- Astronomical Position
- Spot Elevation (in feet)

REFERENCE

- Contours Elevation
- Contours Depression
- River Bed, Extremity
- Stream, Intermittent or Dry
- Stream in Dry River Bed
- Rapids and Falls
- Marsh or Swamp
- Wooded Areas

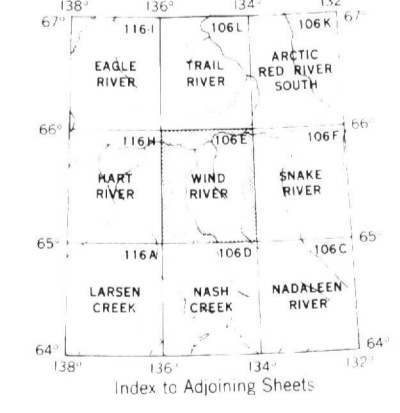

The declination of the compass needle at any place along a broken line is the declination given on that broken line. At other places the declination is between those given on the neighbouring broken lines; thus at the place marked A, the declination is between 35°30' E. and 36°00' E. The declination of the compass needle is decreasing 4 1/2 minutes annually.

O.F. 279 SHEET 1 OF 4