


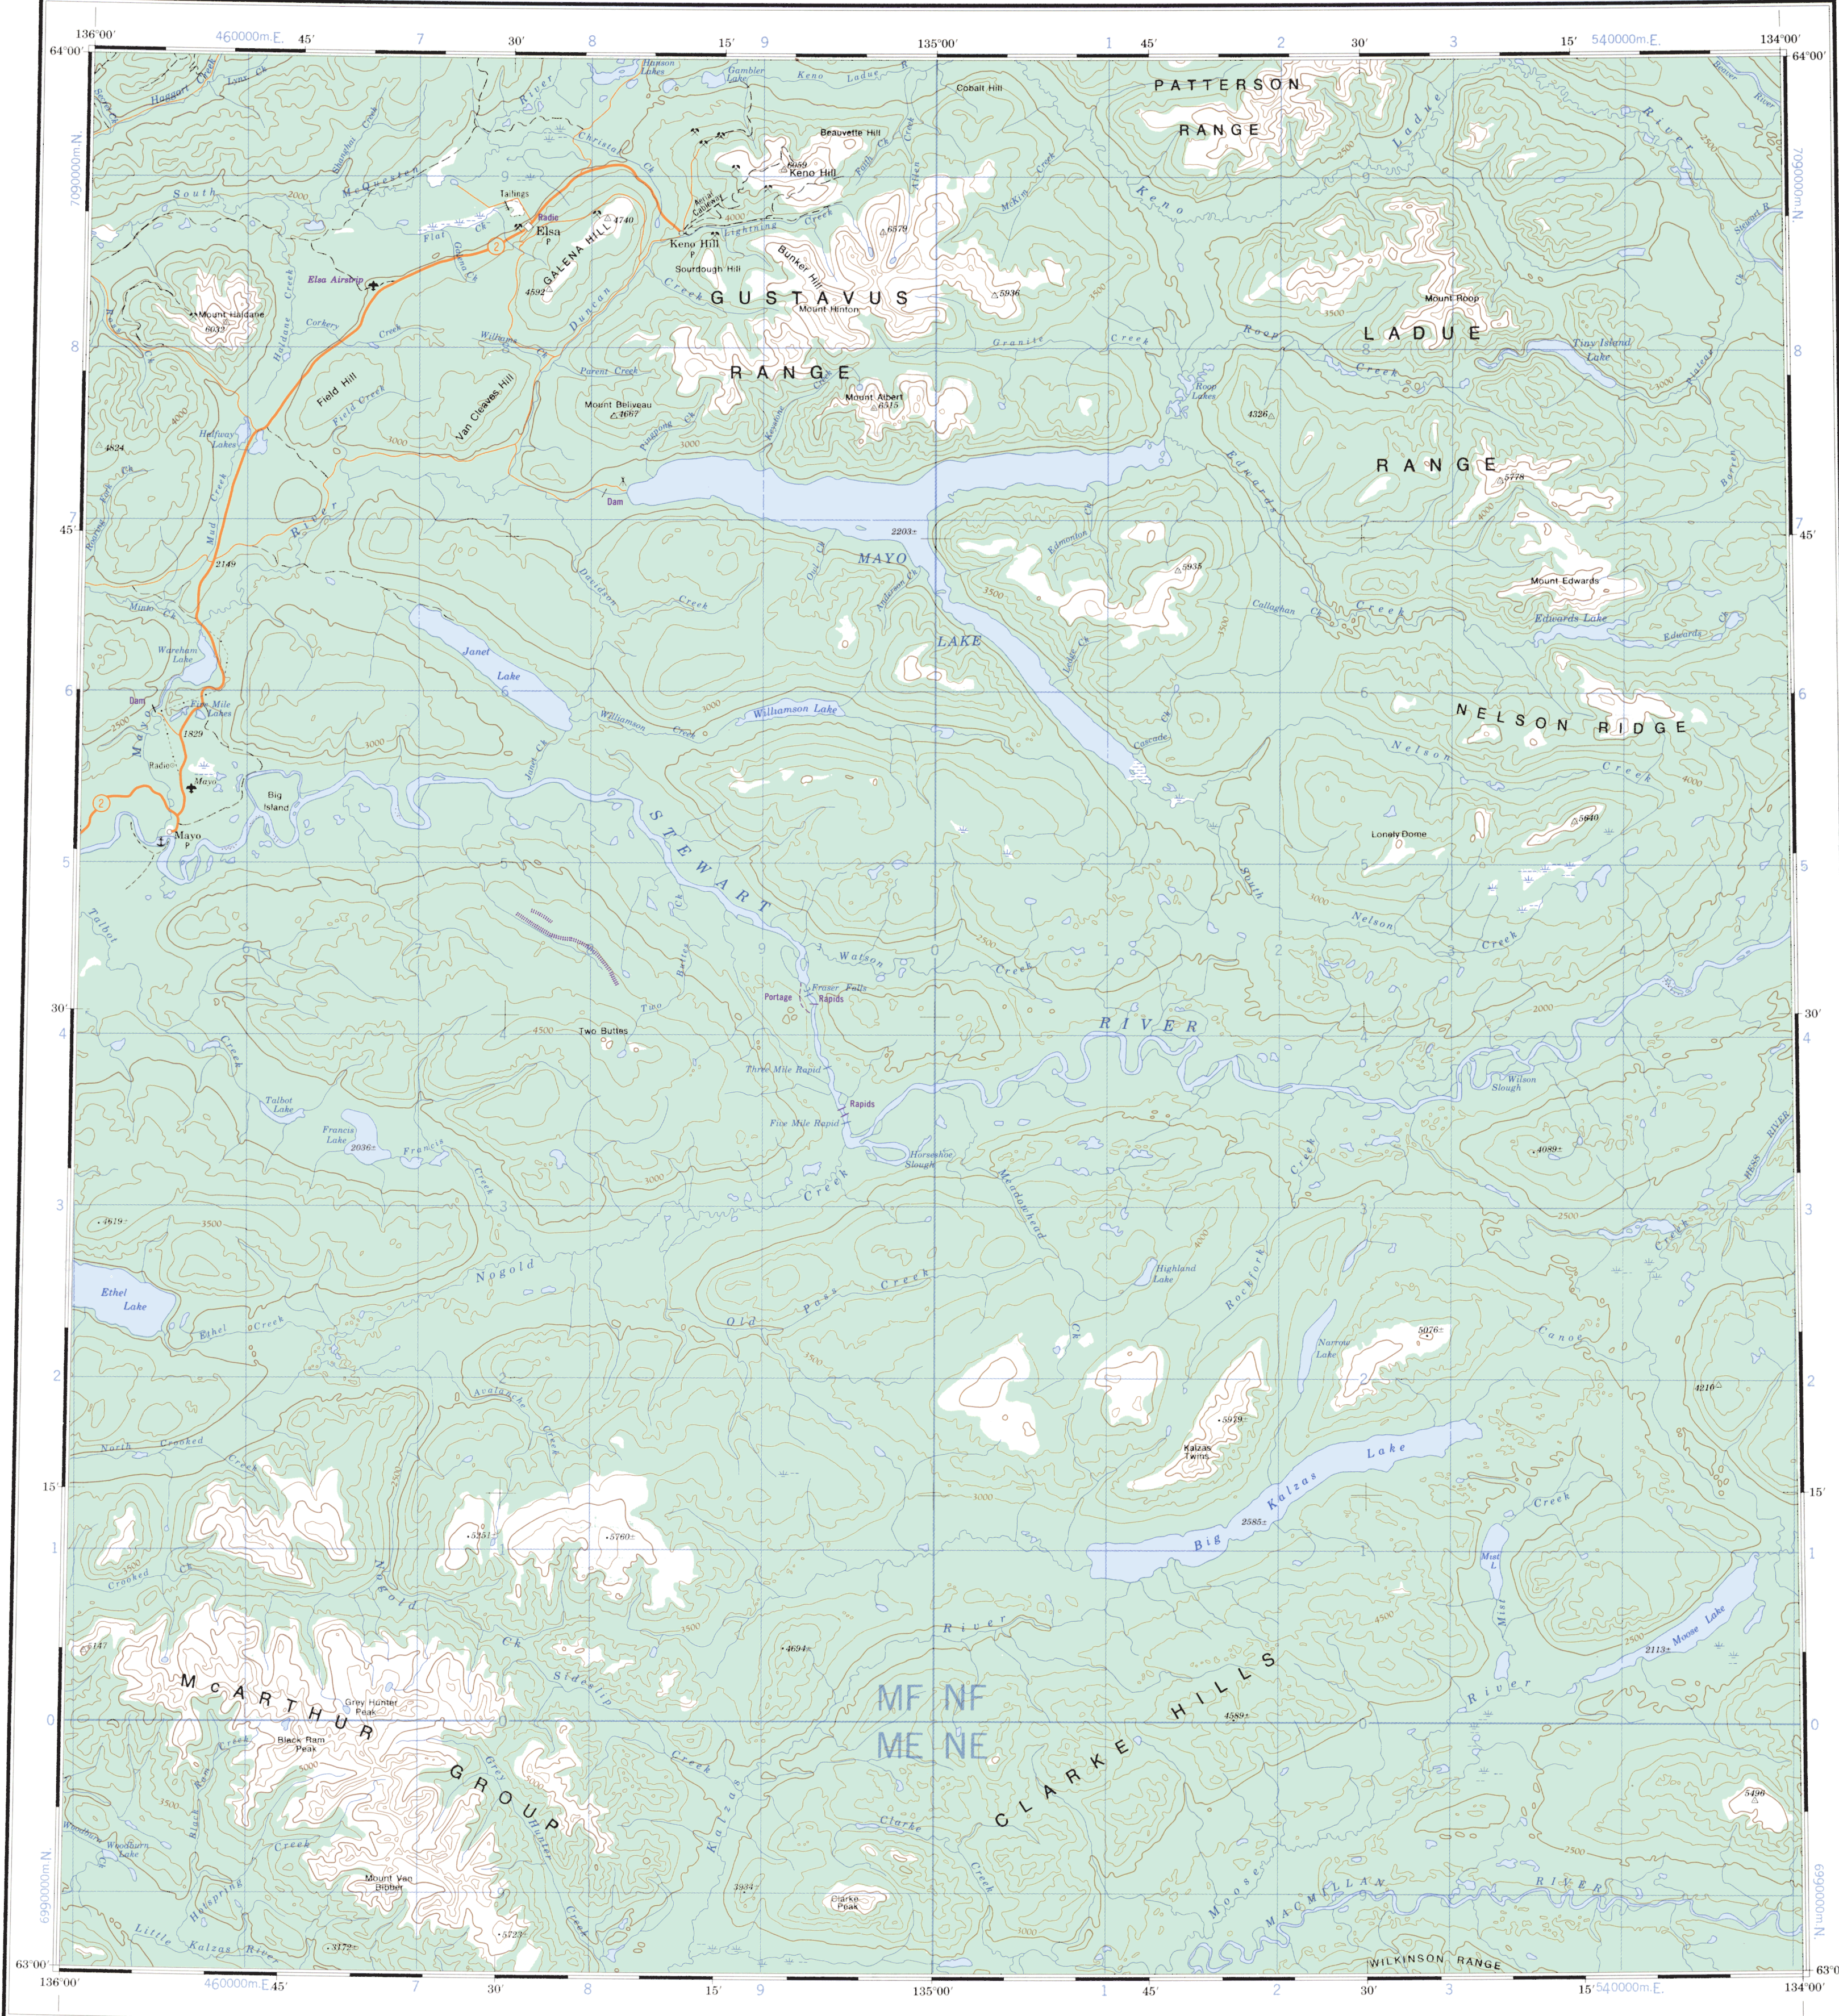



Refer to this map as: 105 M EDITION 3 MCE SERIES A 502

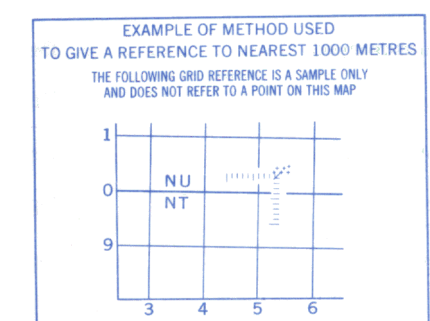

TEN THOUSAND METRE UNIVERSAL TRANSVERSE MERCATOR GRID ZONE 8

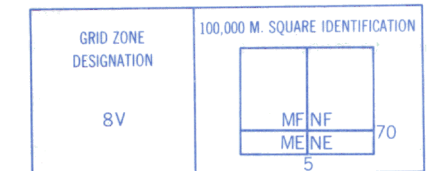

REFERENCE POINT ROCKS (as above) SQUARE: Read letters of 100,000 m. square NU EASTING: Read number on grid line immediately to left of point... NORTHING: Read number on grid line immediately below point...

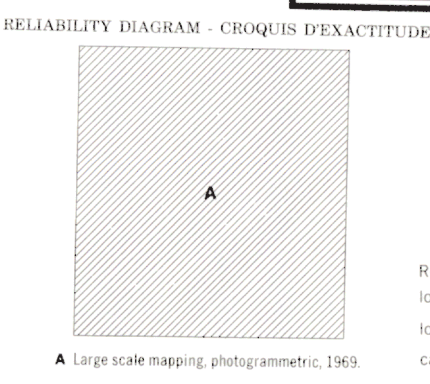


RELIABILITY DIAGRAM - CROQUIS D'EXACTITUDE

Produced 1965 by the SURVEYS AND MAPPING BRANCH, DEPARTMENT OF ENERGY, MINES AND RESOURCES. Printed 1977. Magnetic declination 1970 varies from 33°15' Easterly at centre of west edge to 34°03' Easterly at centre of east edge. Mean annual change 4.2' Westerly. Interim corrections 1977

- Roads: loose or stabilized surface, all weather... 2 lanes or more... less than 2 lanes... loose surface, dry weather... cart track... trail or portage...

FOR COMPLETE REFERENCE SEE REVERSE SIDE

MAYO YUKON TERRITORY



CONTOUR INTERVAL 500 FEET Elevations in Feet above Mean Sea Level North American Datum 1927 Transverse Mercator Projection

Copies may be obtained from the Map Distribution Office, Department of Energy, Mines and Resources, Ottawa.

Établie en 1965 par la DIRECTION DES LEVÉS ET DE LA CARTOGRAPHIE, MINISTÈRE DE L'ÉNERGIE, DES MINES ET DES RESSOURCES. Imprimée en 1977. La déclinaison magnétique pour 1970 varie de 33°15' Est au centre de la limite Ouest à 34°03' Est au centre de la limite Est. Variation moyenne annuelle 4,2' Ouest. Corrections Provisoires, 1977

- Routes: gravier aggloméré, toute saison... 2 voies ou plus... moins de 2 voies... gravier période sèche... de terre... sentier ou portage...

POUR UNE LISTE COMPLÈTE DES SIGNES, VOIR AU VERSO

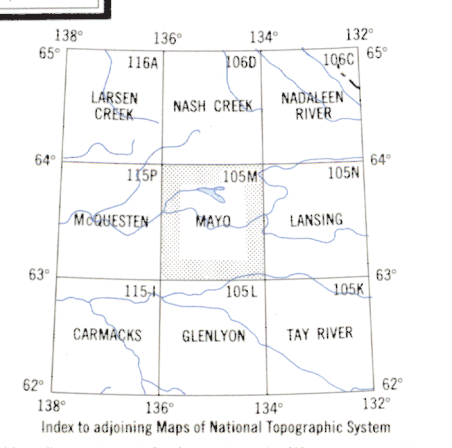


Tableau d'assemblage du Système national de référence cartographique