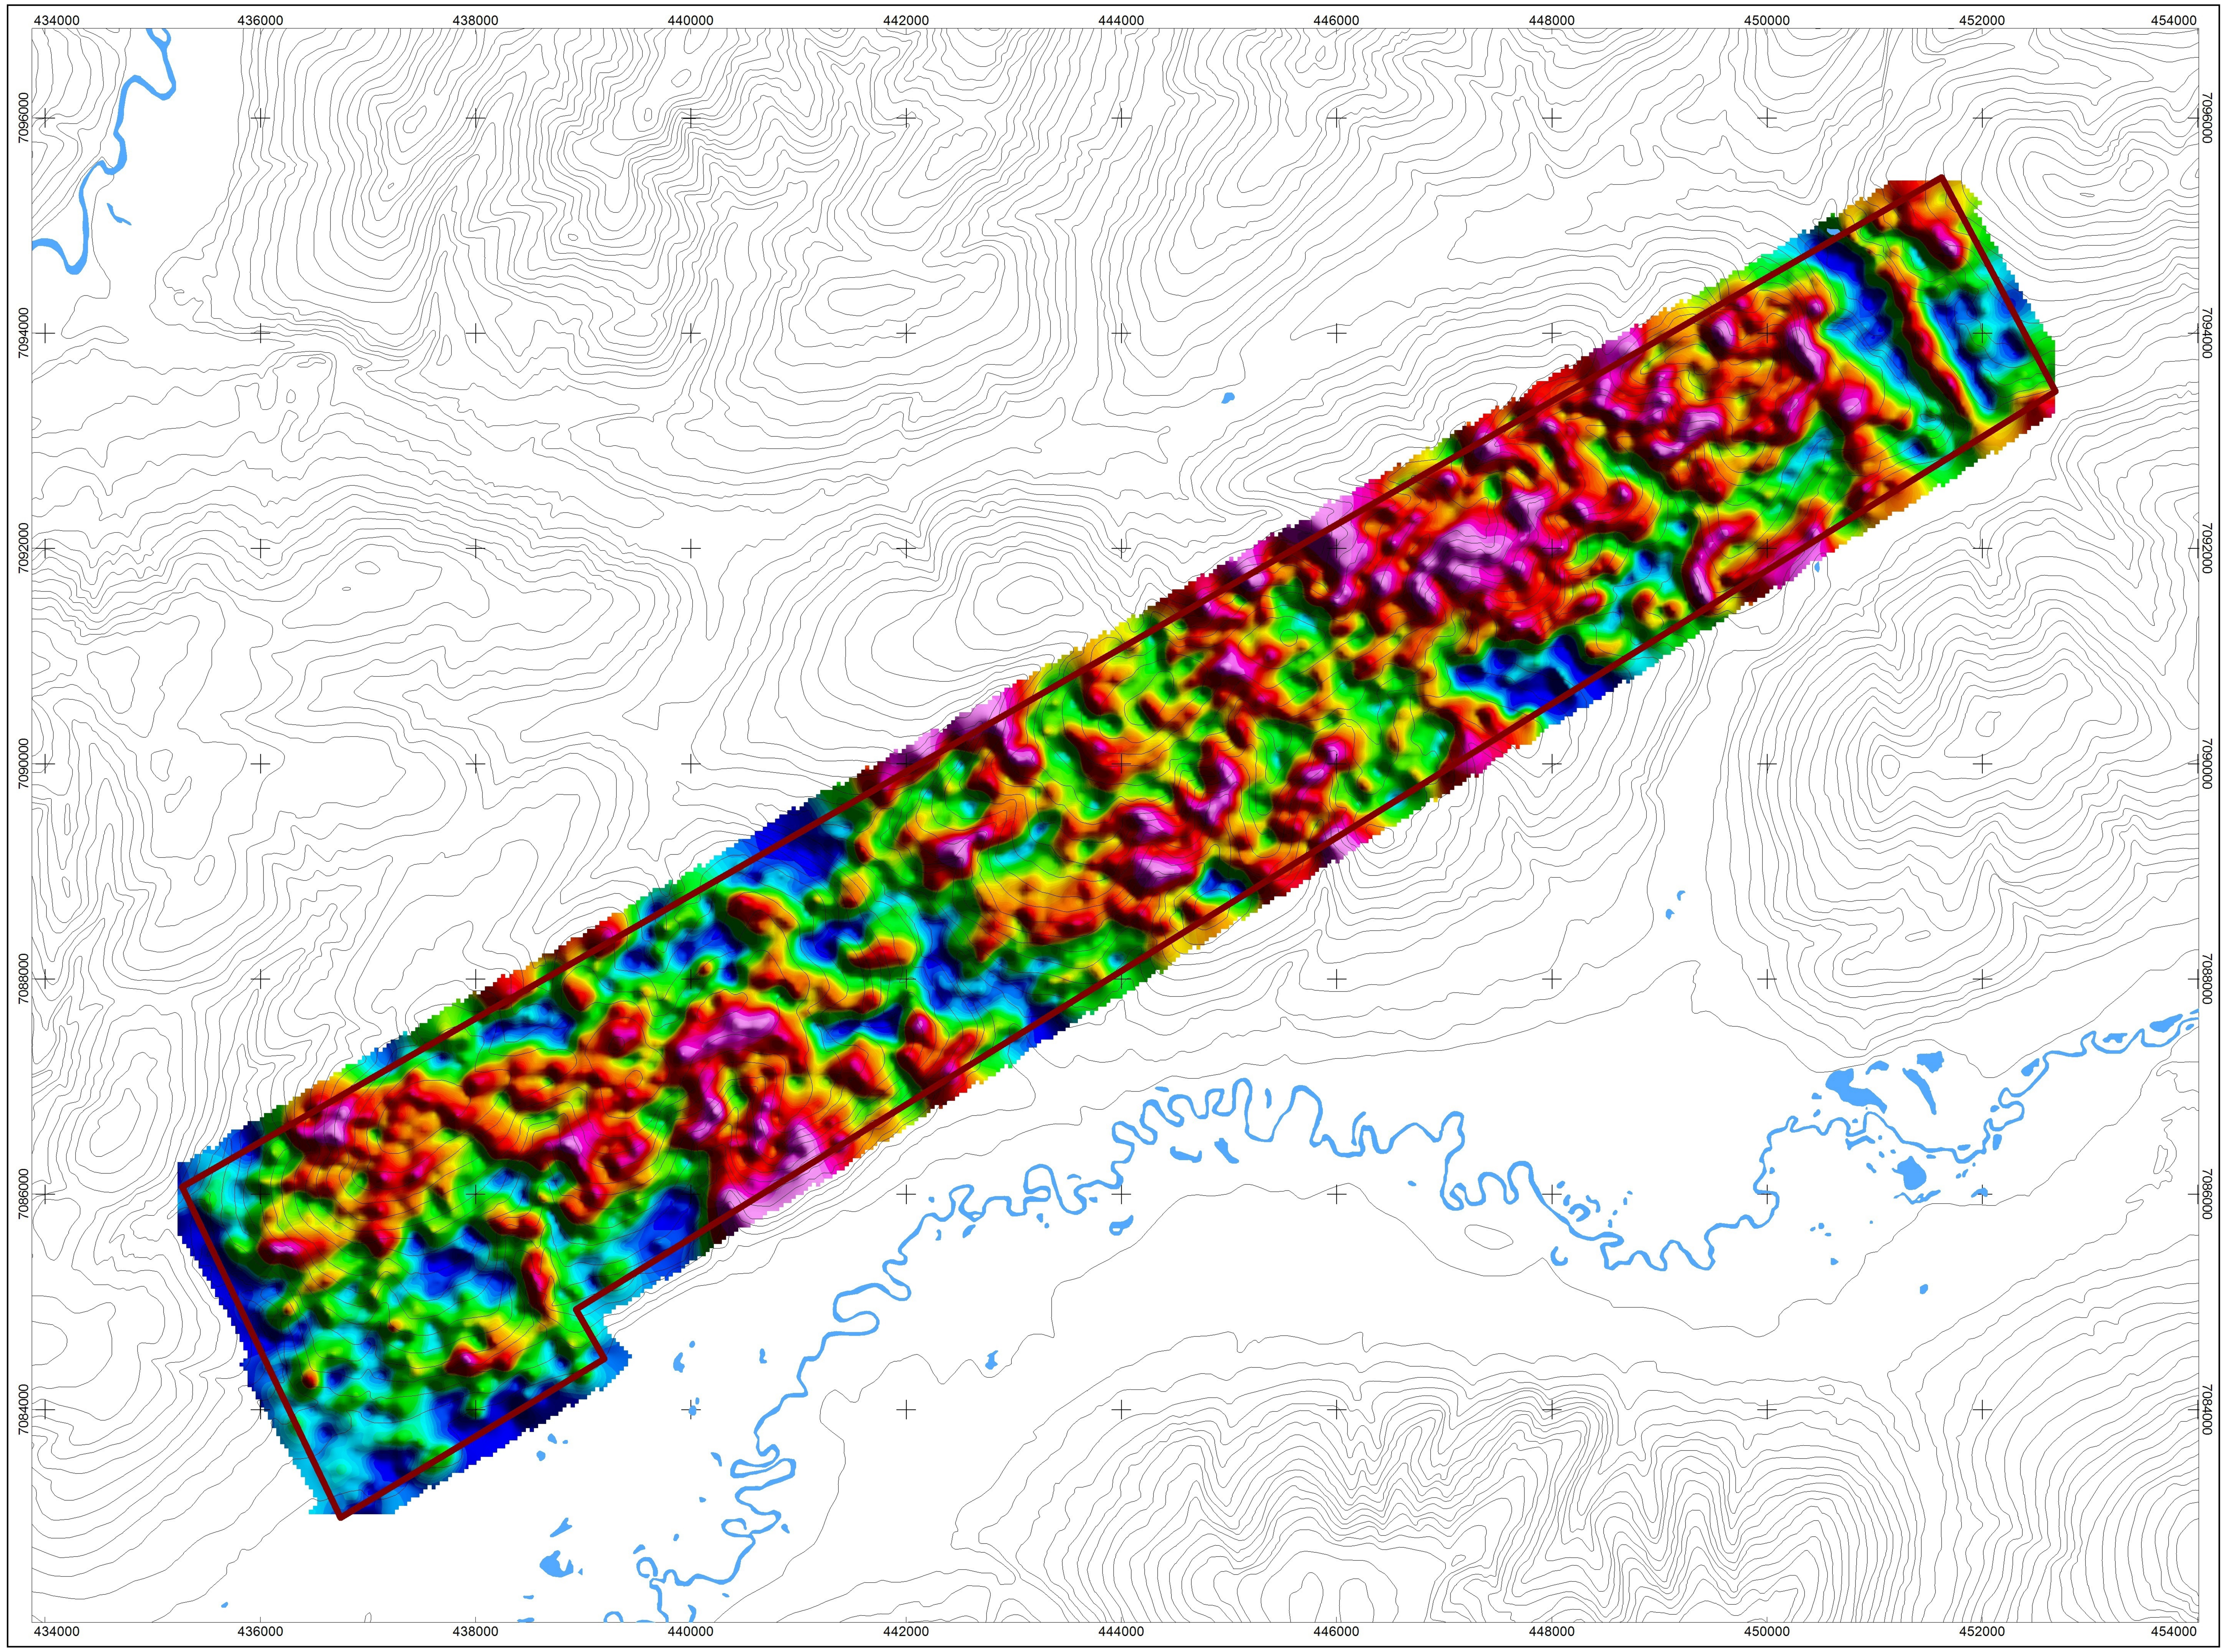

National Topographyic System

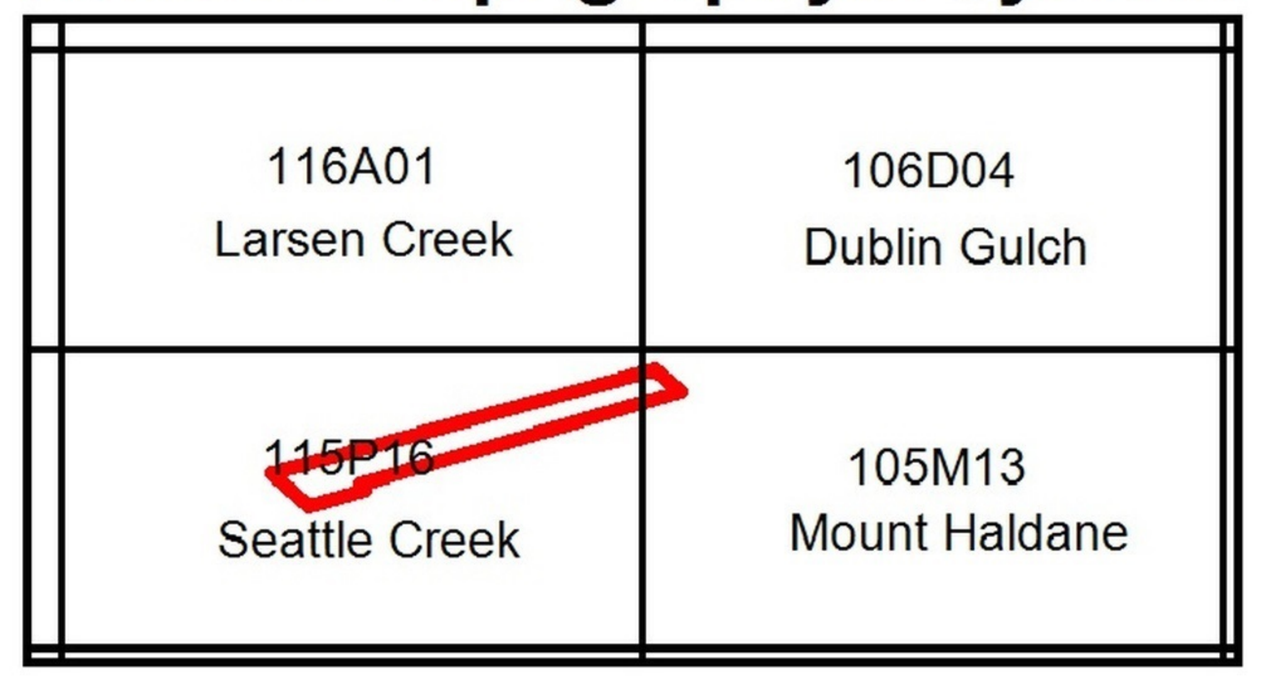

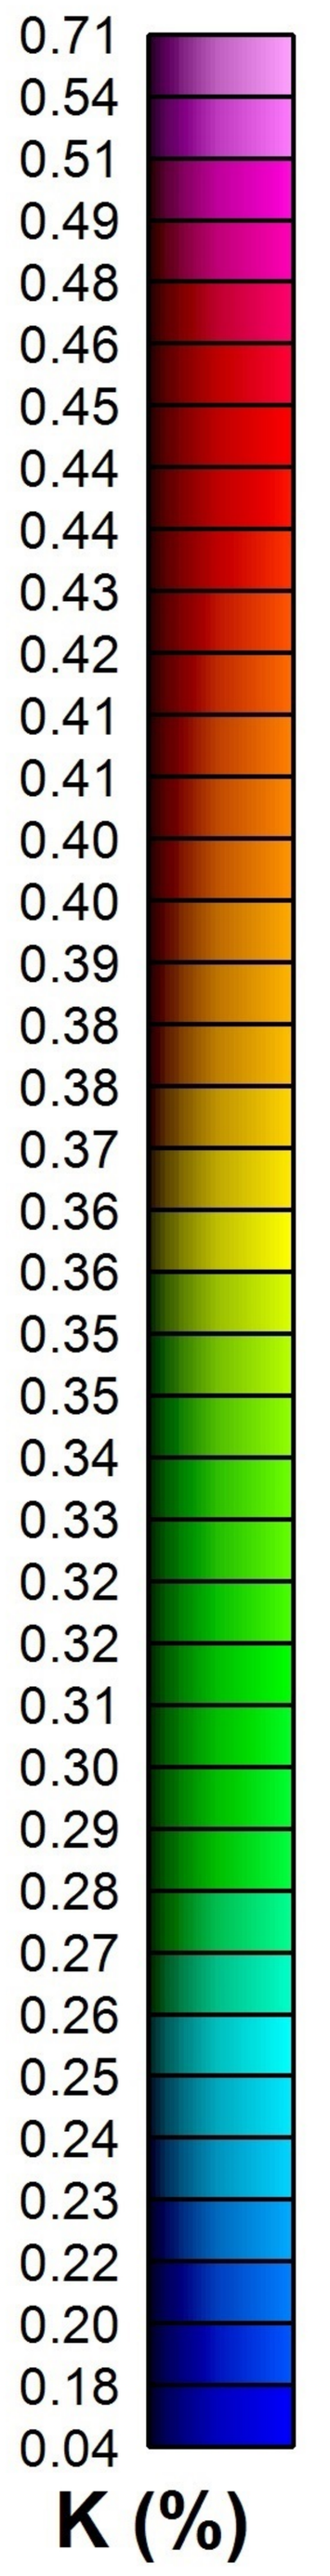

MAP PROJECTION:

Projection: Universal Transverse Mercator Zone 8N

Datum: WGS 84

Local Datum Transform: World

GOODMAN CREEK BLOCK SURVEY SPECIFICATIONS:

Survey Date:	September 19, 2016
Survey Base:	Mayo, Yukon
Aircraft Type:	Eurocopter AS350
Registration:	C-GSVY
Survey Technology:	Magnetic and Radiometric Survey
Mean Flight Height:	35.6 meters
Survey Line Spacing:	150 meters
Survey Line Direction:	150°/330°
Tie Line Spacing:	1500 meters
Tie Line Direction:	060°/240°

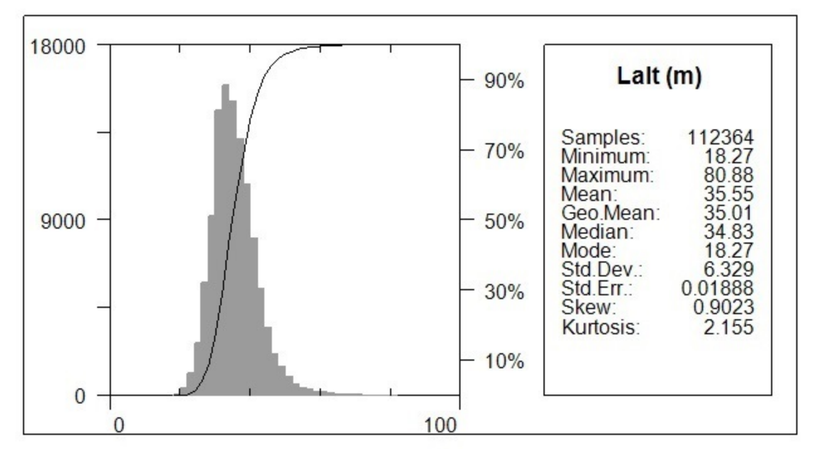

AIRBORNE SURVEY SYSTEM:

Magnetometer Sensor:	Scintrex CS-3 Cesium
Configuration:	Stinger with 3 axis compensation
Sample Rate:	10 Hz
Sensitivity:	0.0006 nT √Hz rms
Gamma Ray Spectrometer:	Pico Envirotec GRS-10 Gamma Spectrometer
Downward-Looking Crystals:	16.8 litres of NaI(Tl) crystals
Upward-Looking Crystals:	4.2 litres of NaI(Tl) crystals
Sample Rate:	1 Hz

Legend

Water Bodies (unclassified)..................................

Goodman Creek Survey Block Outline....................

DATA REFERENCE:

Radiometric data have been corrected for effective height, aircraft, cosmic, radon, stripping ratios, and attenuations, and then converted to apparent radioelement concentrations.

TOPOGRAPHIC REFERENCE:

National Topographic Data Base (NTDB), Canada. Ottawa, ON: Government of Canada, Natural Resources Canada, Center for Topographic Information. Contour interval at 100 ft.

URL <http://ftp.geogratis.gc.ca/pub/nrcan_rncan/vector/ntdb_bndt/>[2007]

Scale 1:35000

500 0 500 1000 1500 2000 2500

(meters)

WGS 84 / UTM zone 8N

NTS SHEETS 105M13; 115P16

Nevada Zinc Corporation

Radiometric Map

Goodman Creek Survey Block

Potassium - Equivalent Concentration in Percentage

October 7, 2016

Precision GeoSurveys

Plate7

GC_K%

National Topographic System

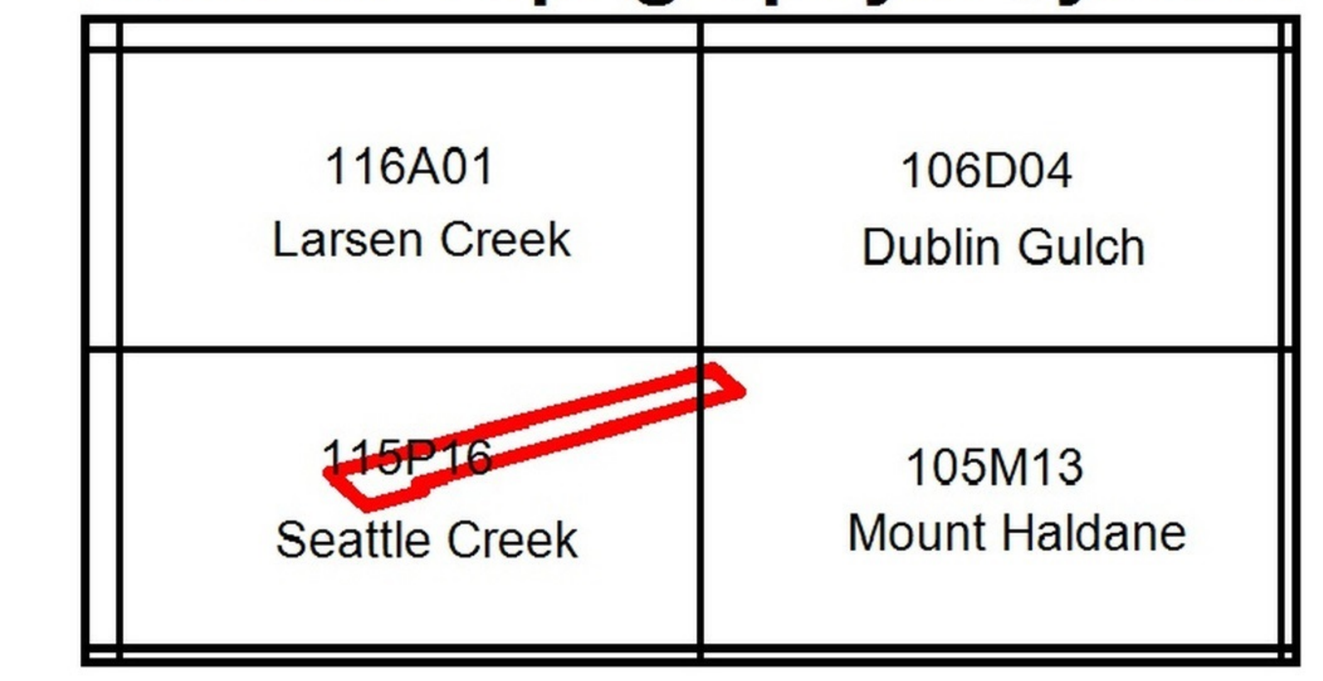

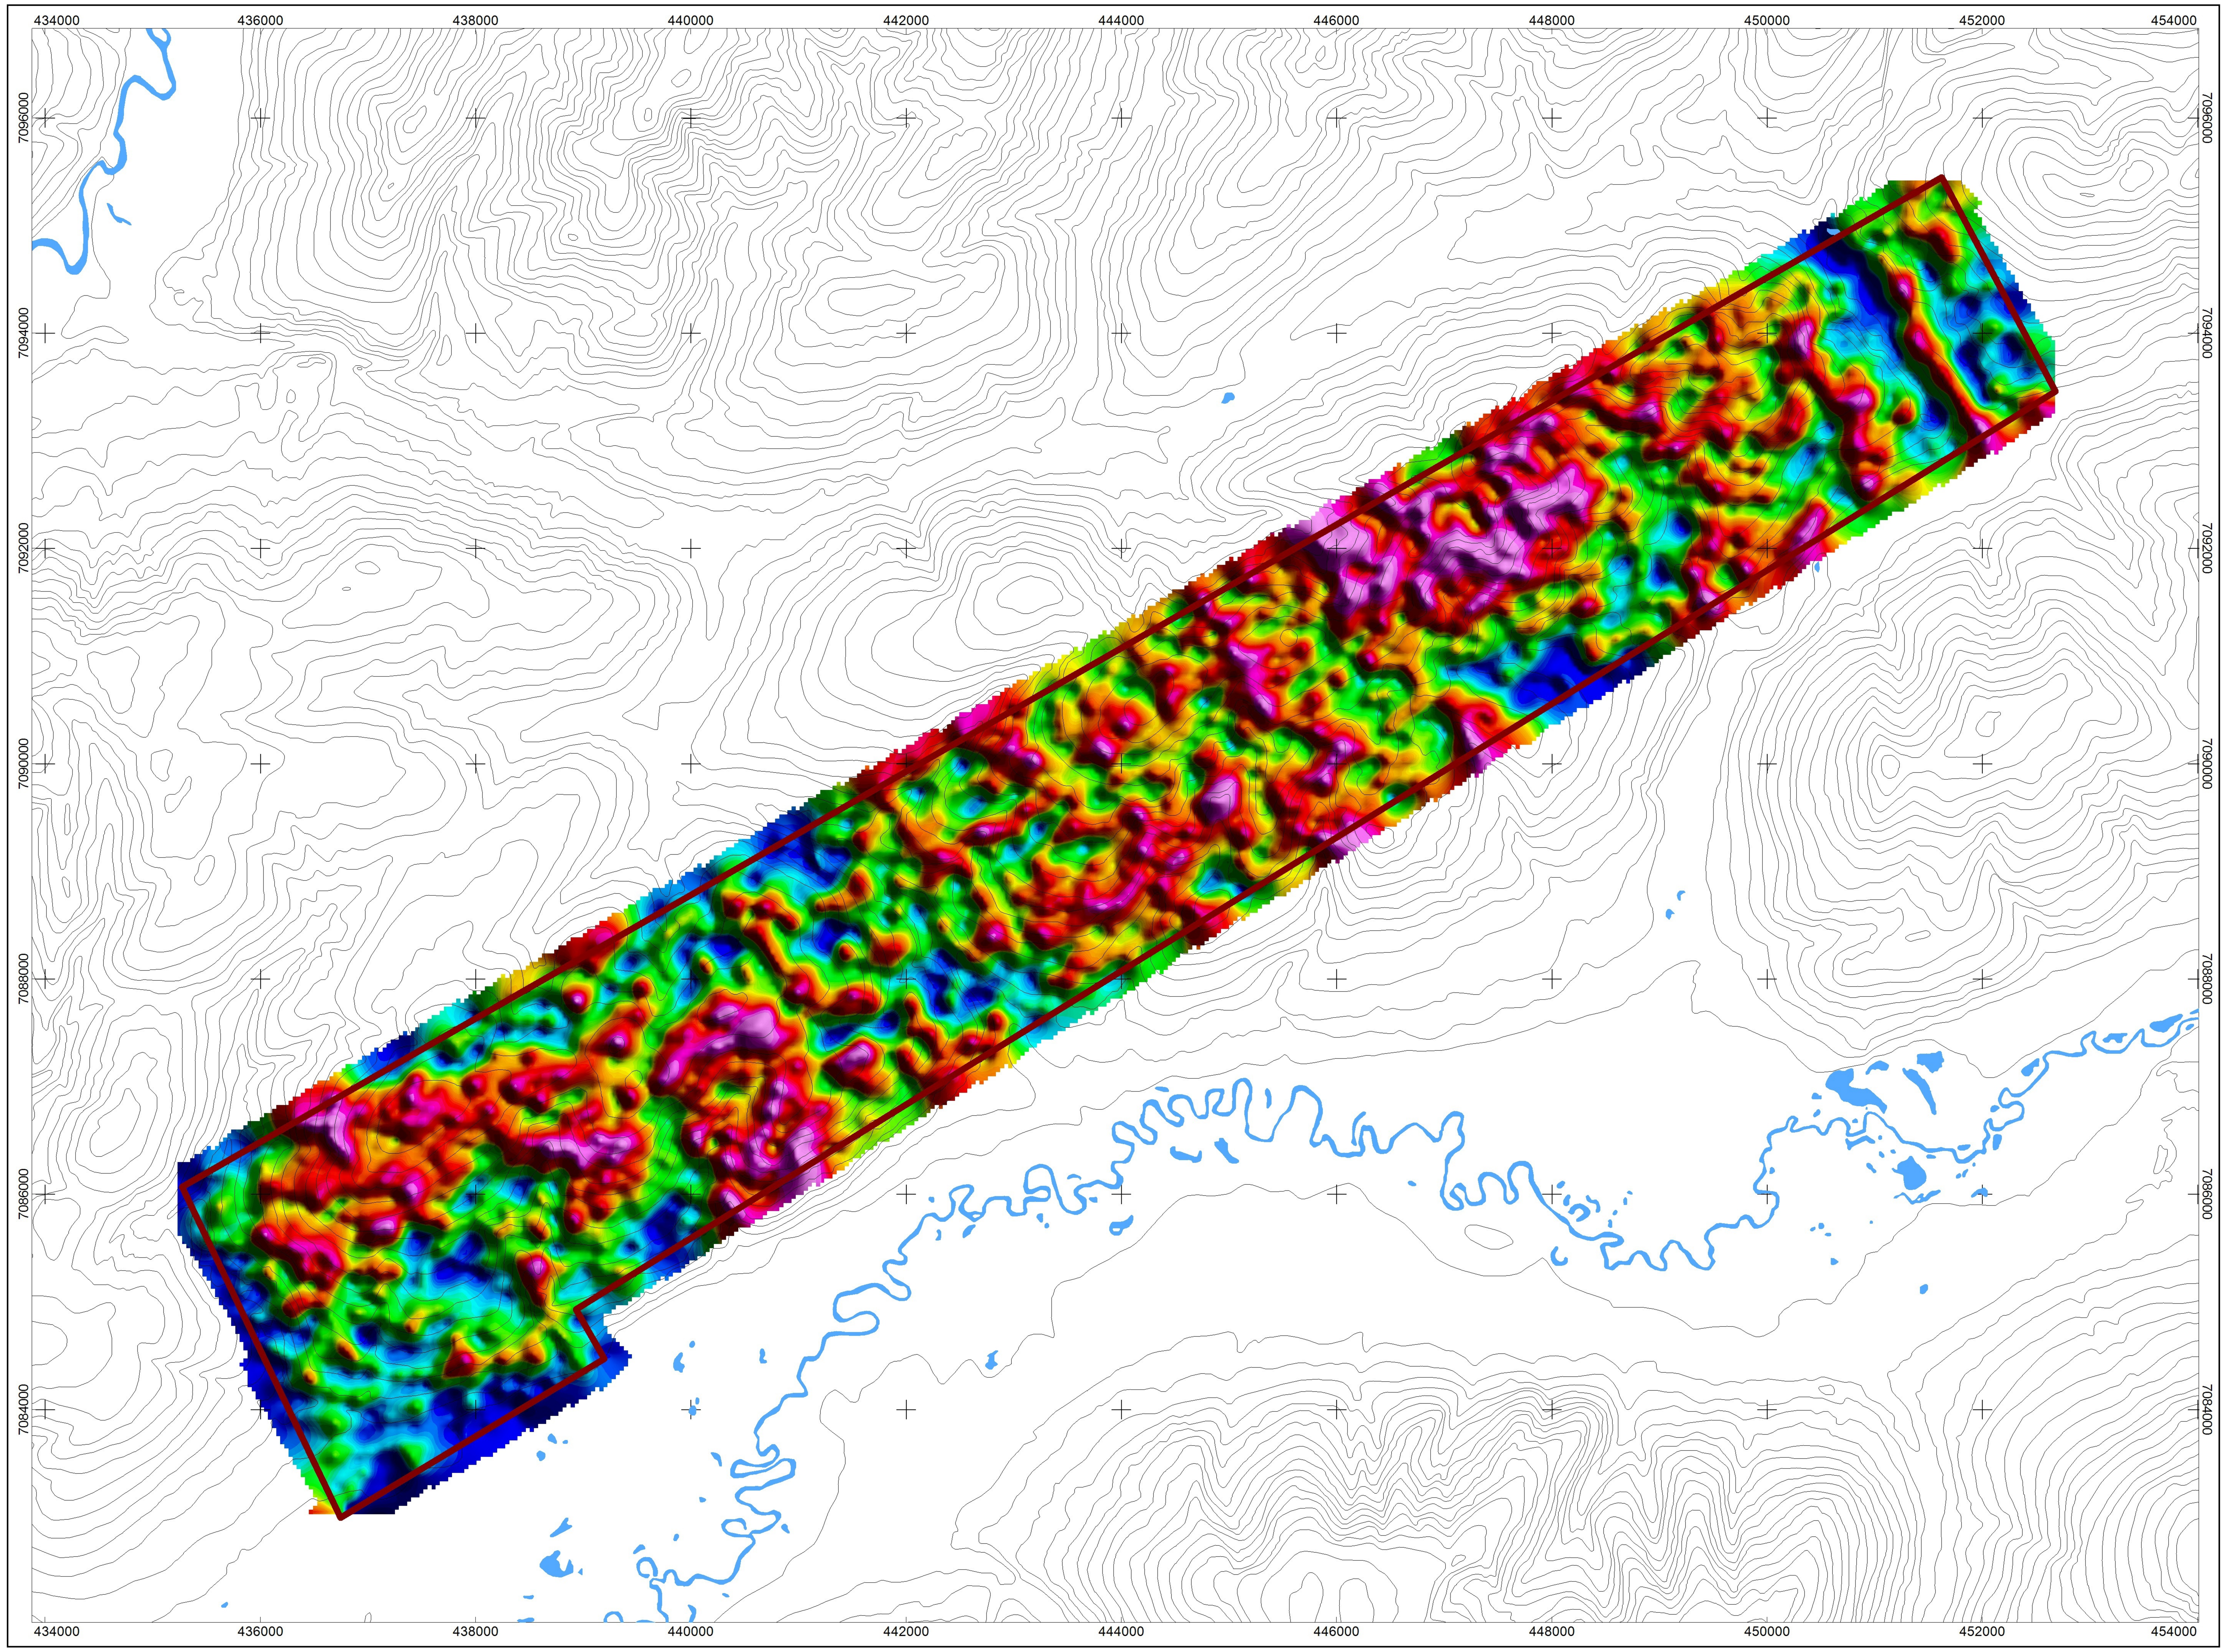

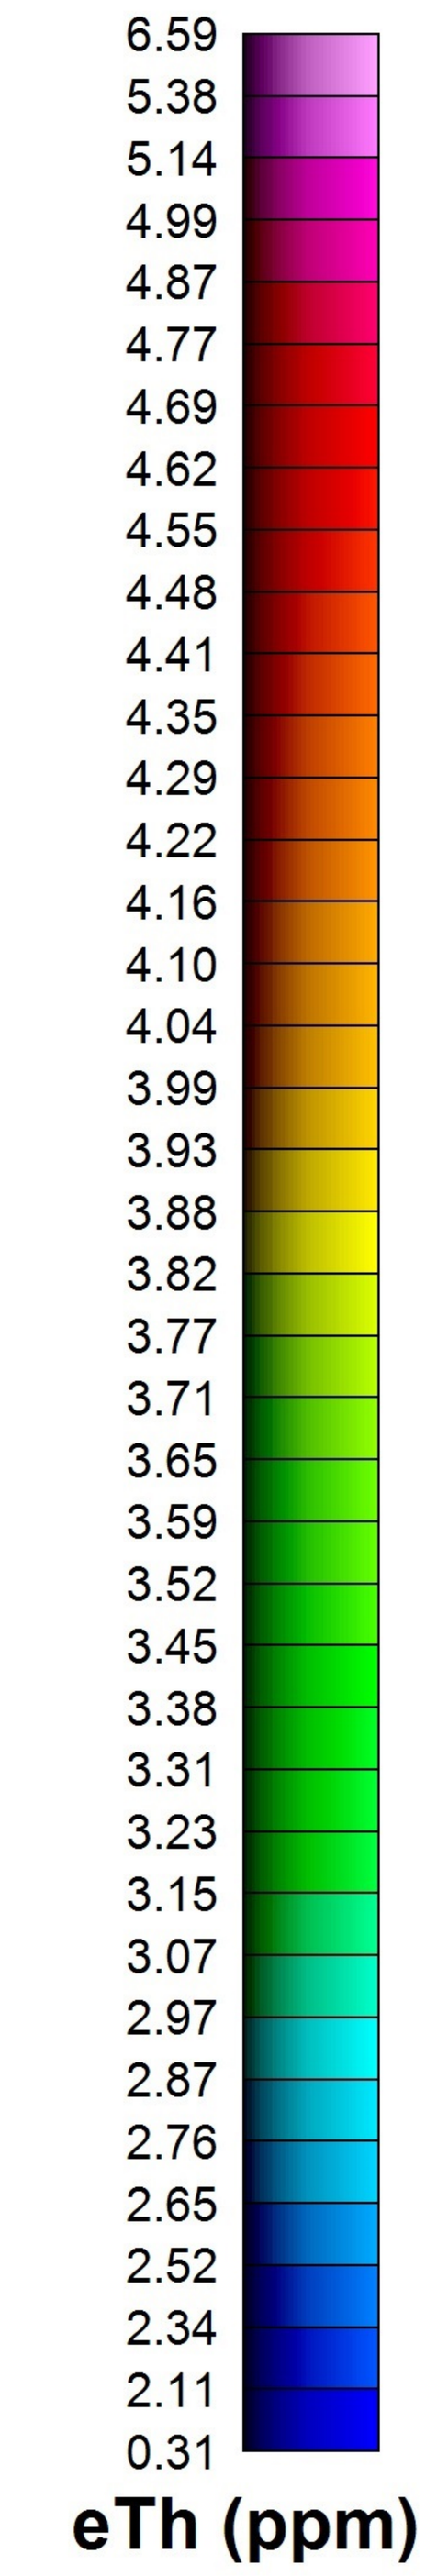

MAP PROJECTION:

Projection: Universal Transverse Mercator Zone 8N

Datum: WGS 84

Local Datum Transform: World

GOODMAN CREEK BLOCK SURVEY SPECIFICATIONS:

Survey Date:	September 19, 2016
Survey Base:	Mayo, Yukon
Aircraft Type:	Eurocopter AS350
Registration:	C-GSVY
Survey Technology:	Magnetic and Radiometric Survey
Mean Flight Height:	35.6 meters
Survey Line Spacing:	150 meters
Survey Line Direction:	150°/330°
Tie Line Spacing:	1500 meters
Tie Line Direction:	060°/240°

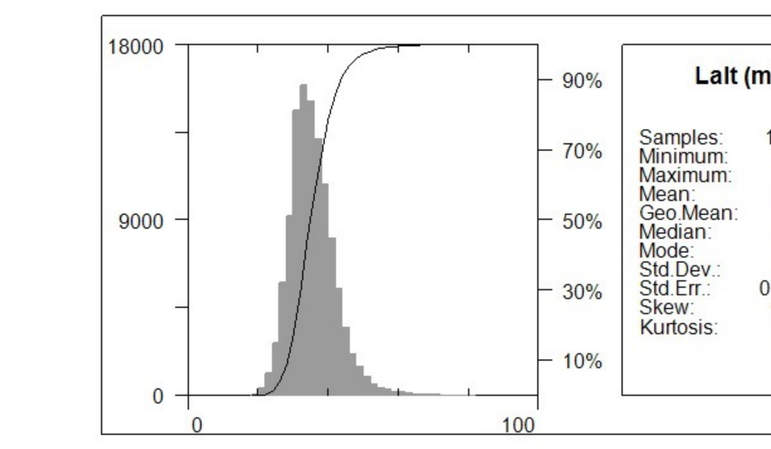

AIRBORNE SURVEY SYSTEM:

Magnetometer Sensor:	Scintrex CS-3 Cesium
Configuration:	Stinger with 3 axis compensation
Sample Rate:	10 Hz
Sensitivity:	0.0006 nT √Hz rms
Gamma Ray Spectrometer:	Pico Envirotec GRS-10 Gamma Spectrometer
Downward-Looking Crystals:	16.8 litres of NaI(Tl) crystals
Upward-Looking Crystals:	4.2 litres of NaI(Tl) crystals
Sample Rate:	1 Hz

Legend

Water Bodies (unclassified).................................

Goodman Creek Survey Block Outline...................

DATA REFERENCE:

Radiometric data have been corrected for effective height, aircraft, cosmic, radon, stripping ratios, and attenuations, and then converted to apparent radioelement concentrations.

TOPOGRAPHIC REFERENCE:

National Topographic Data Base (NTDB), Canada. Ottawa, ON: Government of Canada, Natural Resources Canada, Center for Topographic Information. Contour interval at 100 ft.
URL <http://ftp.geogratis.gc.ca/pub/nrcan_rncan/vector/ntdb_bndt/>[2007]



Nevada Zinc Corporation

Radiometric Map

Goodman Creek Survey Block

Thorium - Equivalent Concentration

October 7, 2016

Precision GeoSurveys

Plate8
GC_eTh

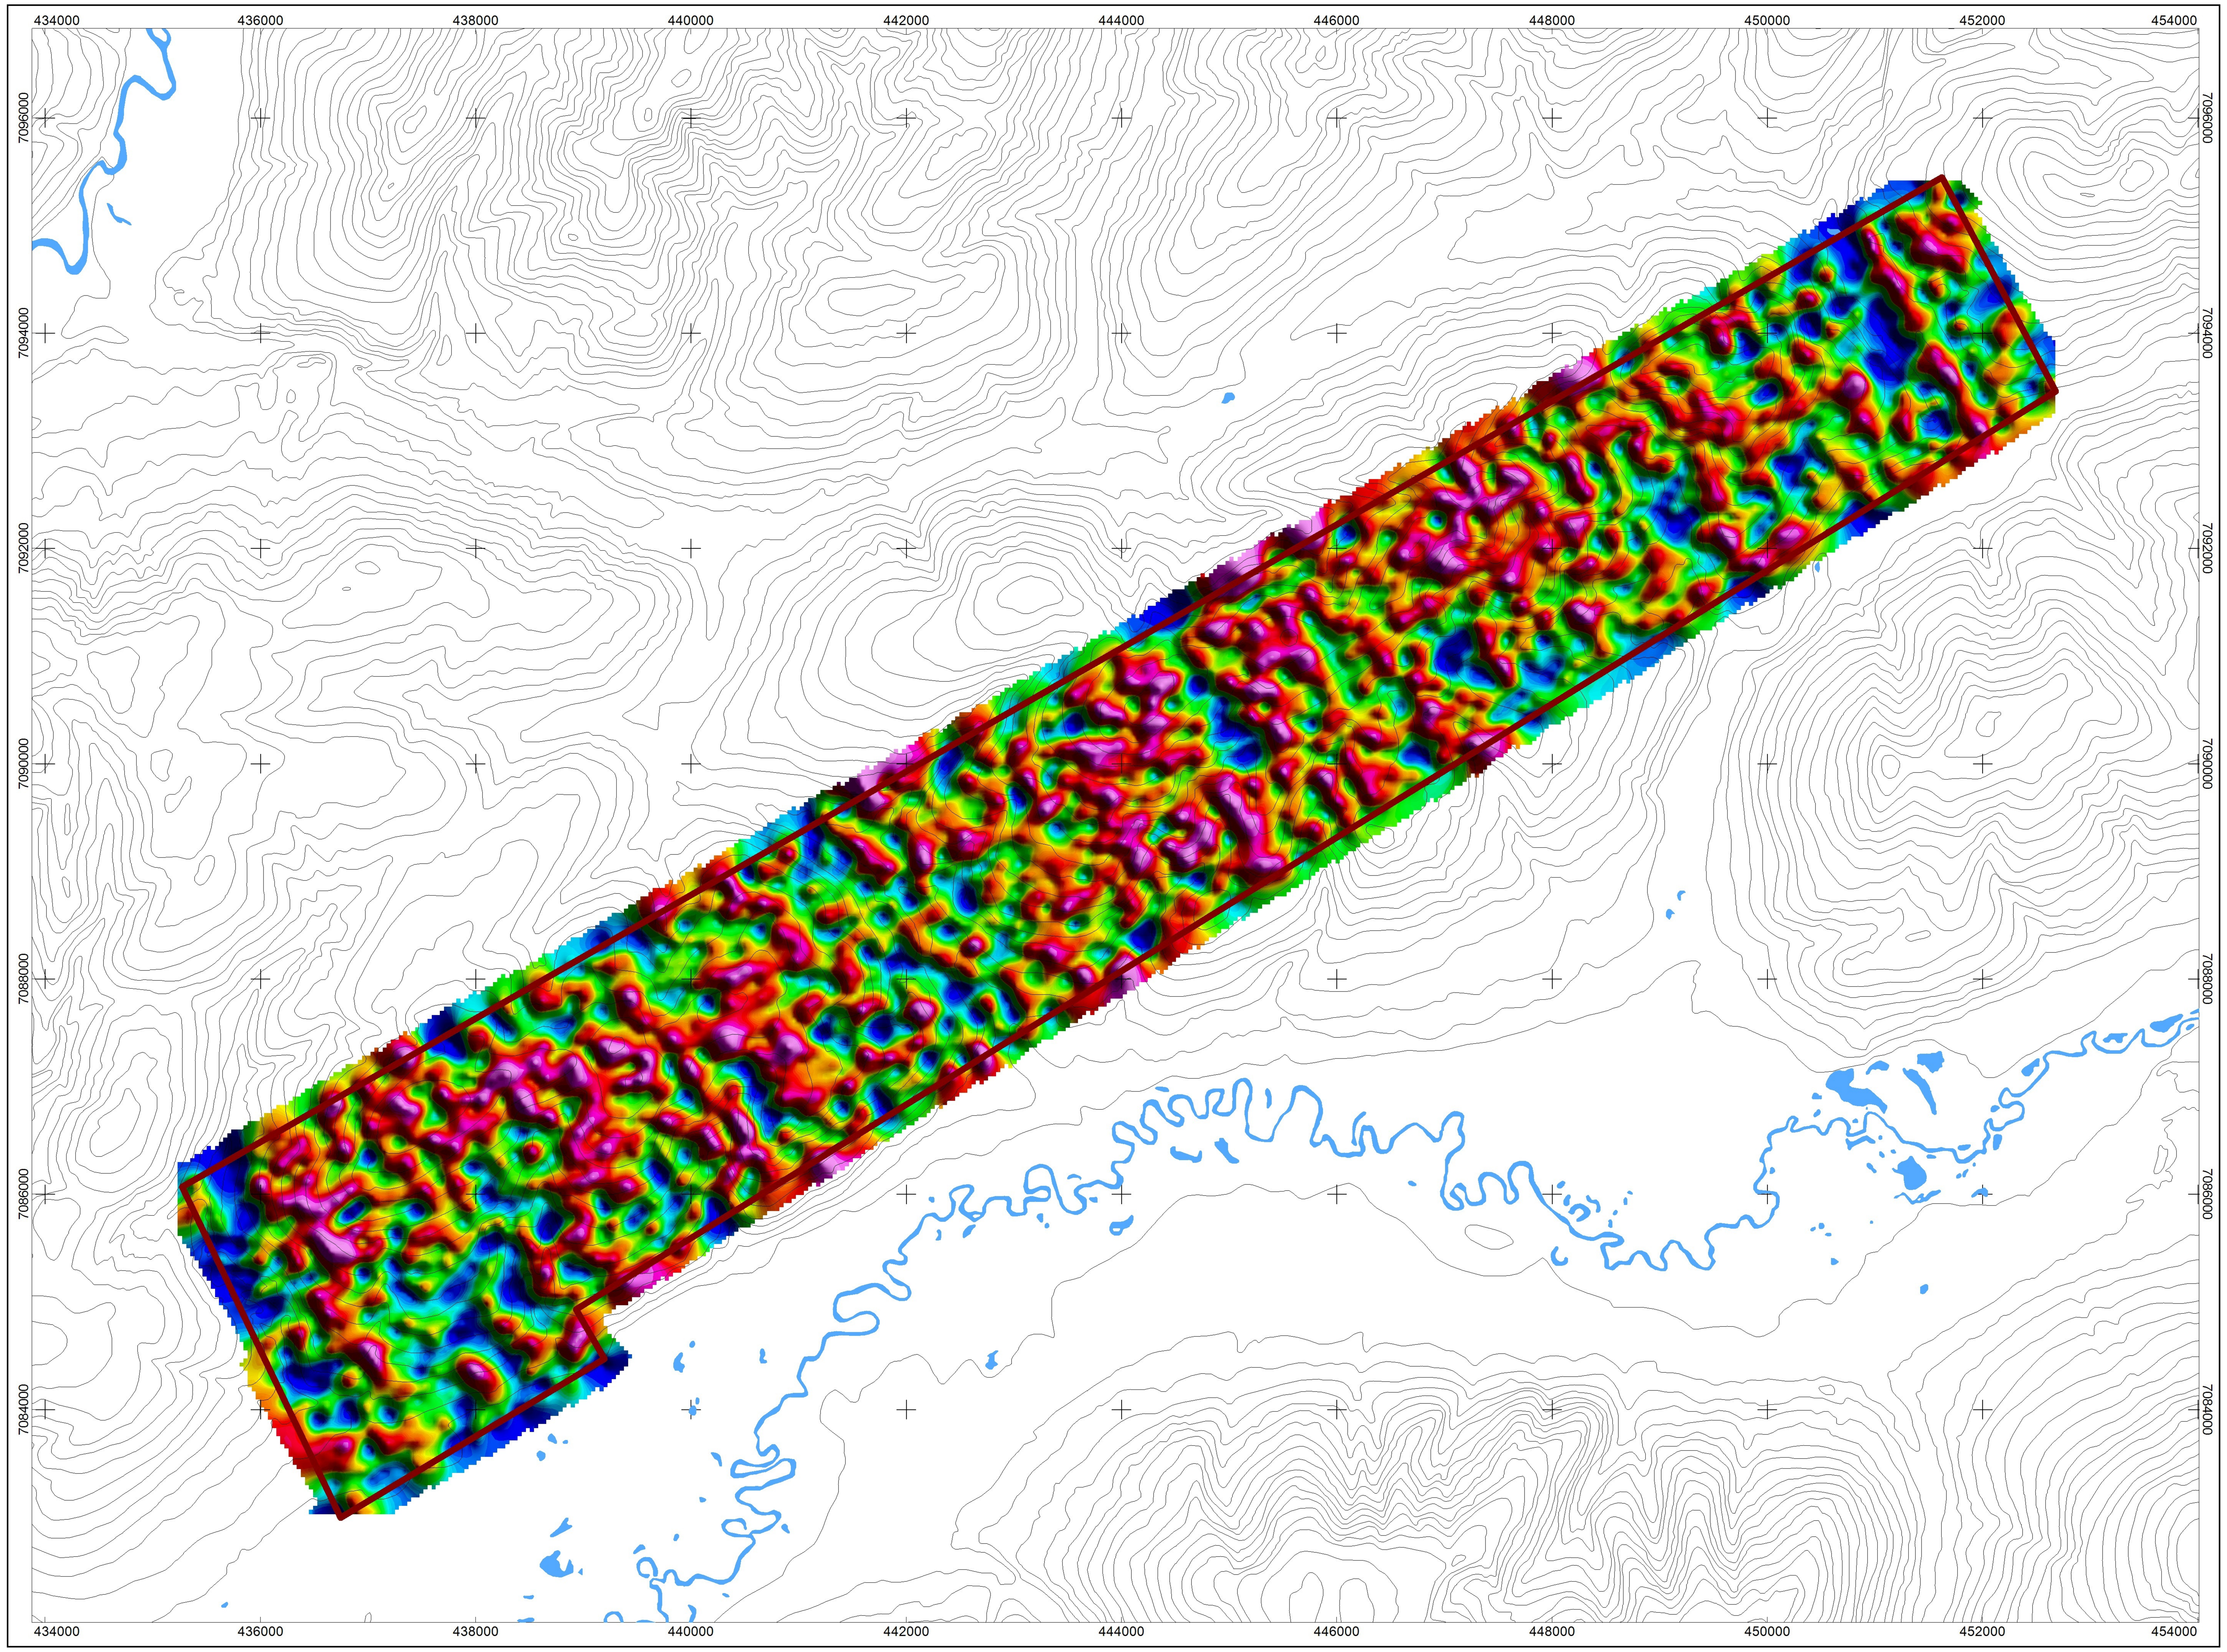

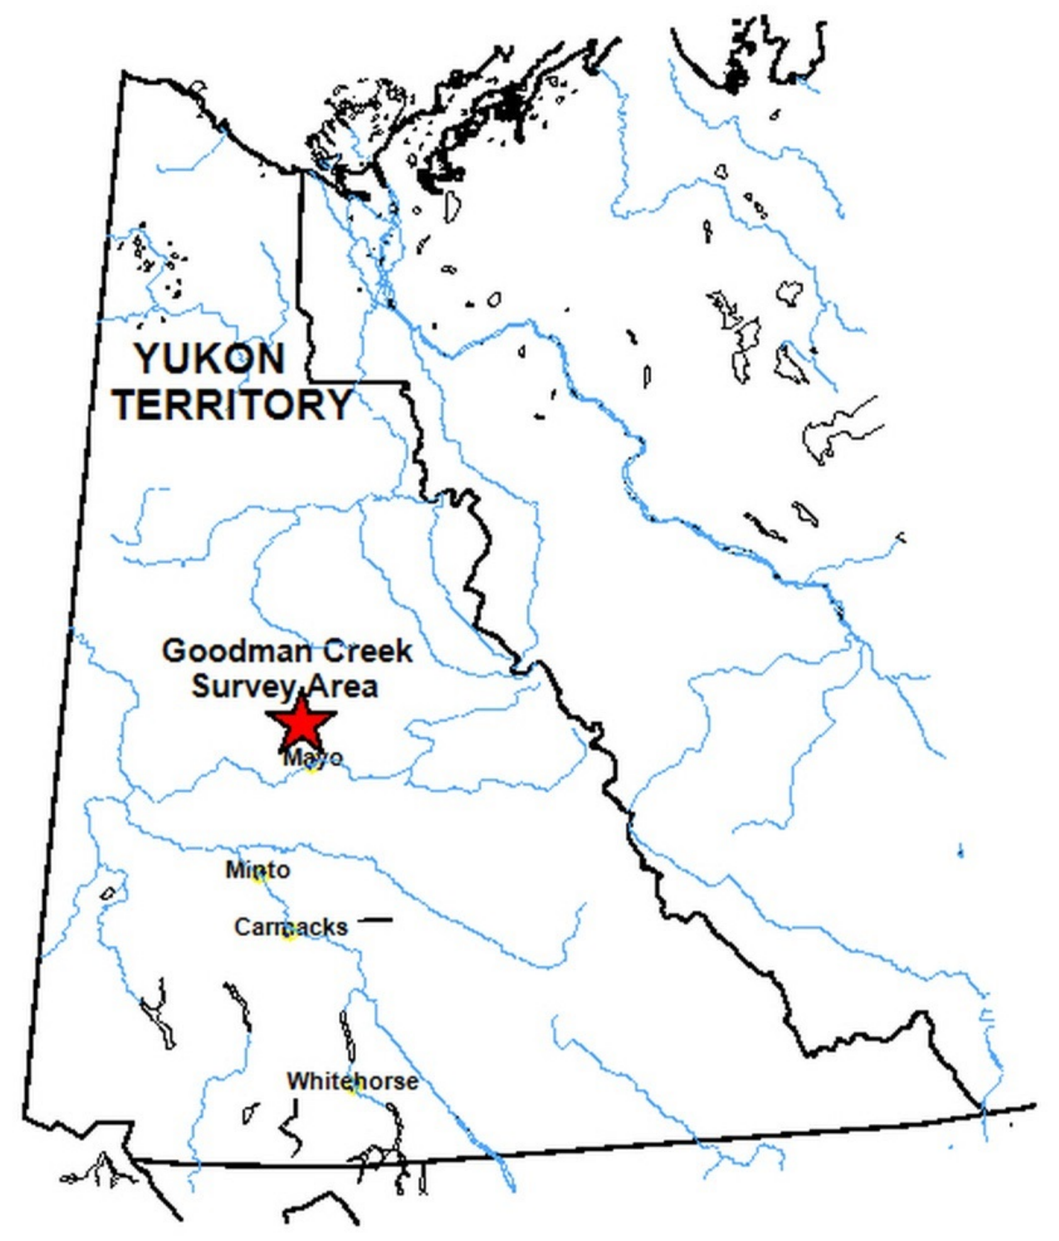

National Topographyic System

116A01 Larsen Creek	106D04 Dublin Gulch
115P16 Seattle Creek	105M13 Mount Haldane

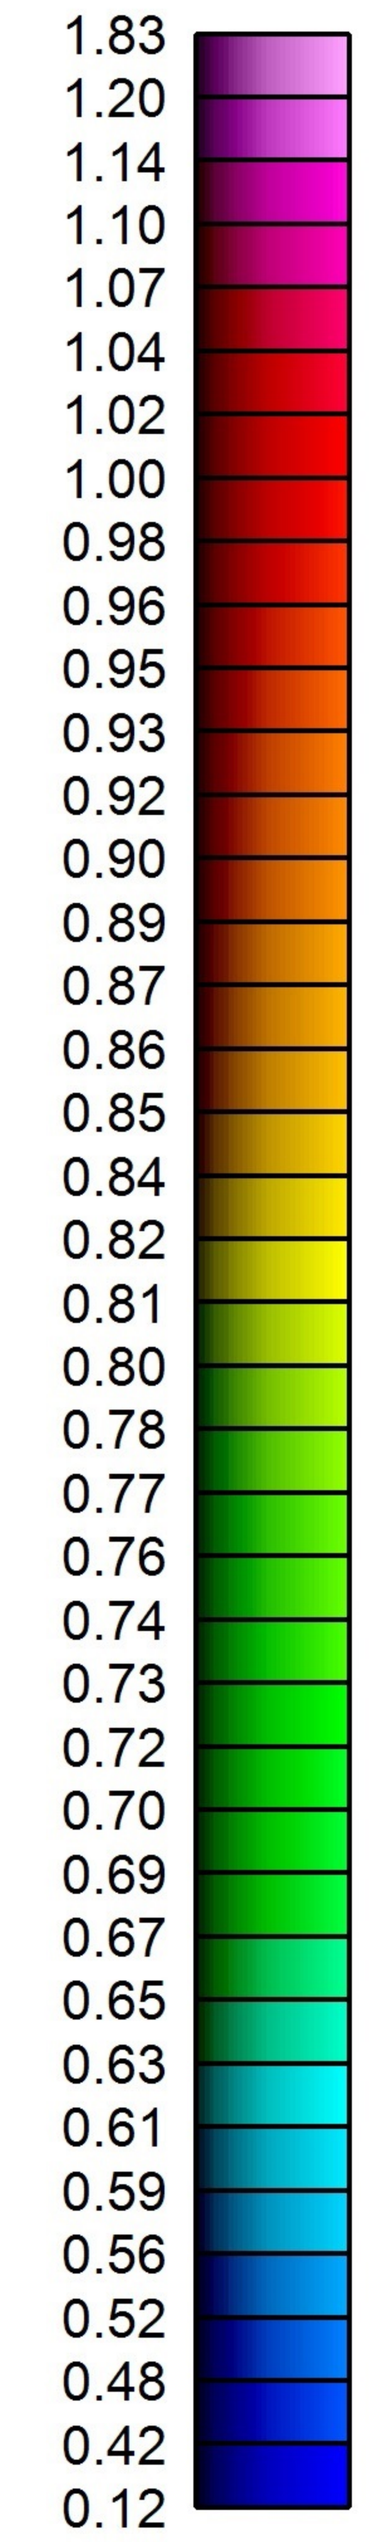

MAP PROJECTION:

Projection: Universal Transverse Mercator Zone 8N
Datum: WGS 84
Local Datum Transform: World

GOODMAN CREEK BLOCK SURVEY SPECIFICATIONS:

Survey Date:	September 19, 2016
Survey Base:	Mayo, Yukon
Aircraft Type:	Eurocopter AS350
Registration:	C-GSVY
Survey Technology:	Magnetic and Radiometric Survey
Mean Flight Height:	35.6 meters
Survey Line Spacing:	150 meters
Survey Line Direction:	150°/330°
Tie Line Spacing:	1500 meters
Tie Line Direction:	060°/240°

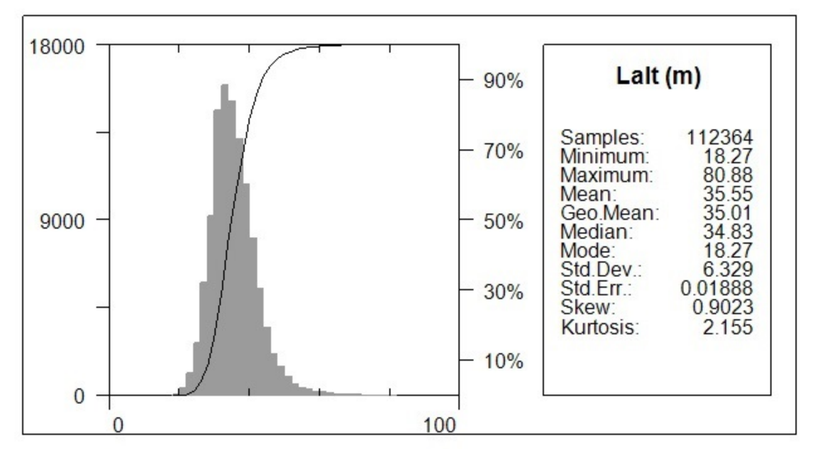

AIRBORNE SURVEY SYSTEM:

Magnetometer Sensor:	Scintrex CS-3 Cesium
Configuration:	Stinger with 3 axis compensation
Sample Rate:	10 Hz
Sensitivity:	0.0006 nT √Hz rms
Gamma Ray Spectrometer:	Pico Envirotec GRS-10 Gamma Spectrometer
Downward-Looking Crystals:	16.8 litres of NaI(Tl) crystals
Upward-Looking Crystals:	4.2 litres of NaI(Tl) crystals
Sample Rate:	1 Hz

Legend

Water Bodies (unclassified)..................................

Goodman Creek Survey Block Outline...................

DATA REFERENCE:

Radiometric data have been corrected for effective height, aircraft, cosmic, radon, stripping ratios, and attenuations, and then converted to apparent radioelement concentrations.

TOPOGRAPHIC REFERENCE:

National Topographic Data Base (NTDB), Canada. Ottawa, ON: Government of Canada, Natural Resources Canada, Center for Topographic Information. Contour interval at 100 ft.
URL <http://ftp.geogratis.gc.ca/pub/nrcan_rncan/vector/ntdb_bndt/>[2007]

Nevada Zinc Corporation

Radiometric Map

Goodman Creek Survey Block
Uranium - Equivalent Concentration
October 7, 2016

Scale 1:35000
500 0 500 1000 1500 2000 2500
(meters)
WGS 84 / UTM zone 8N
NTS SHEETS 105M13, 115P16

Precision GeoSurveys

Plate9
GC_eU

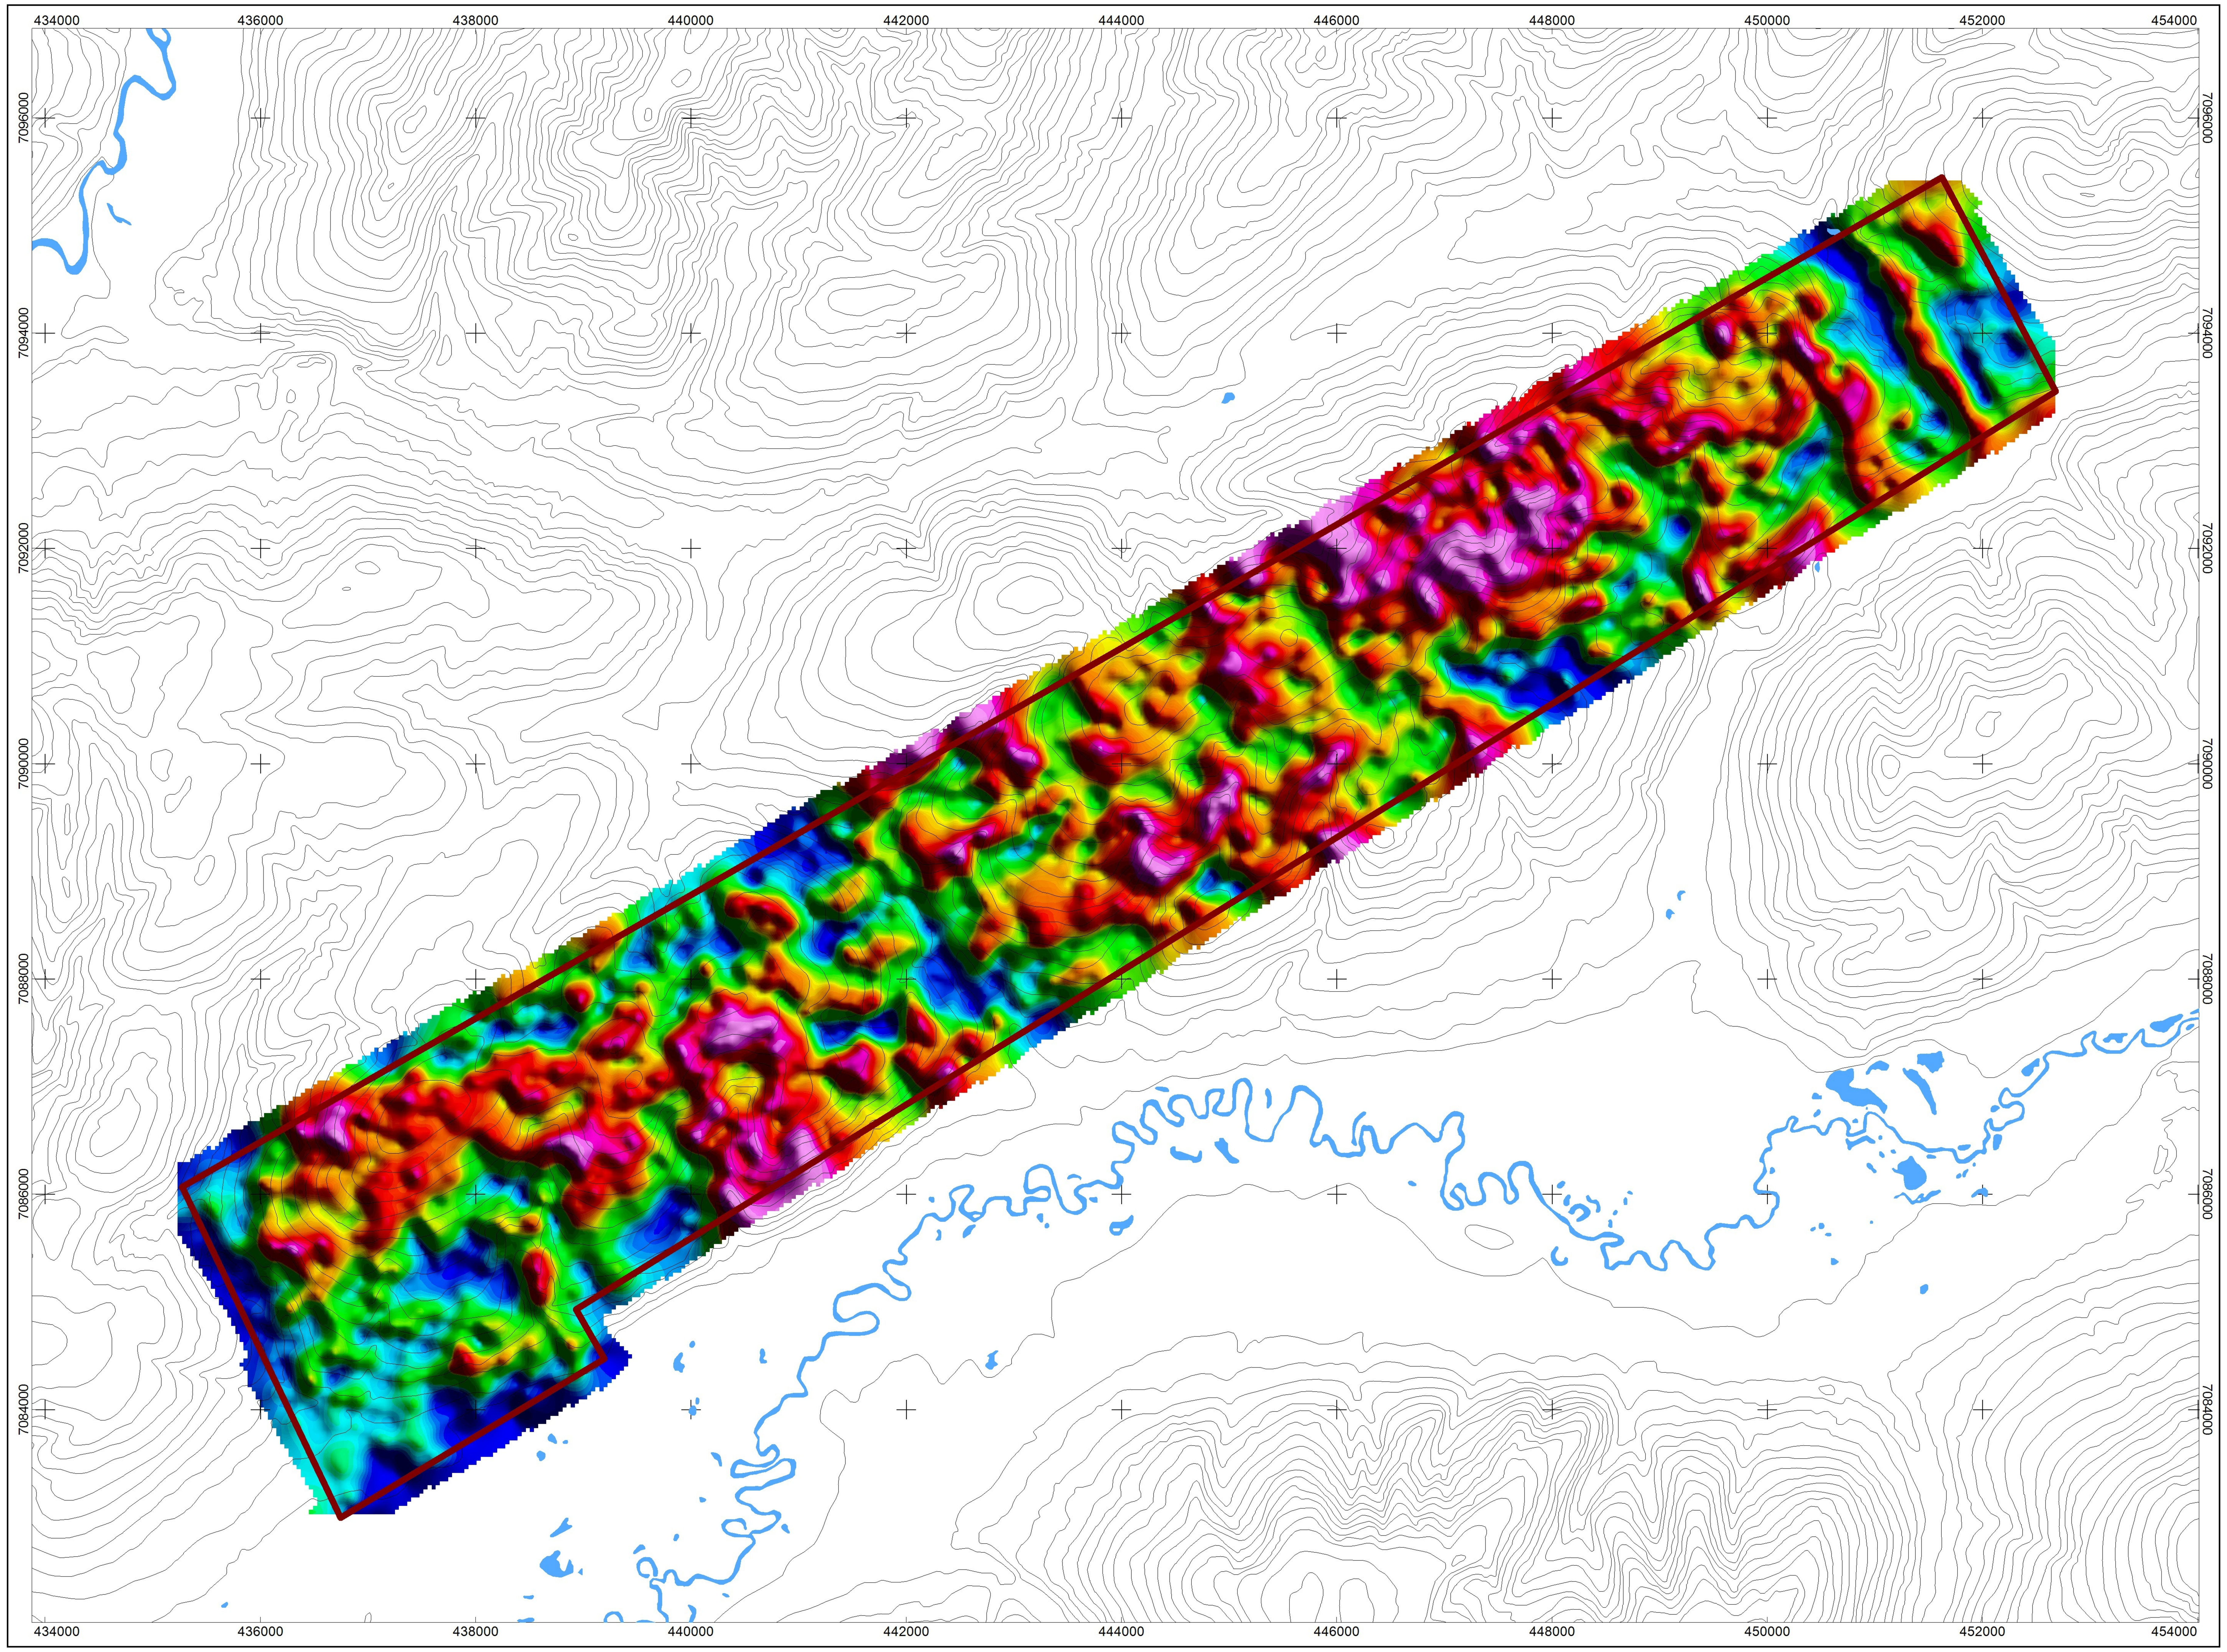

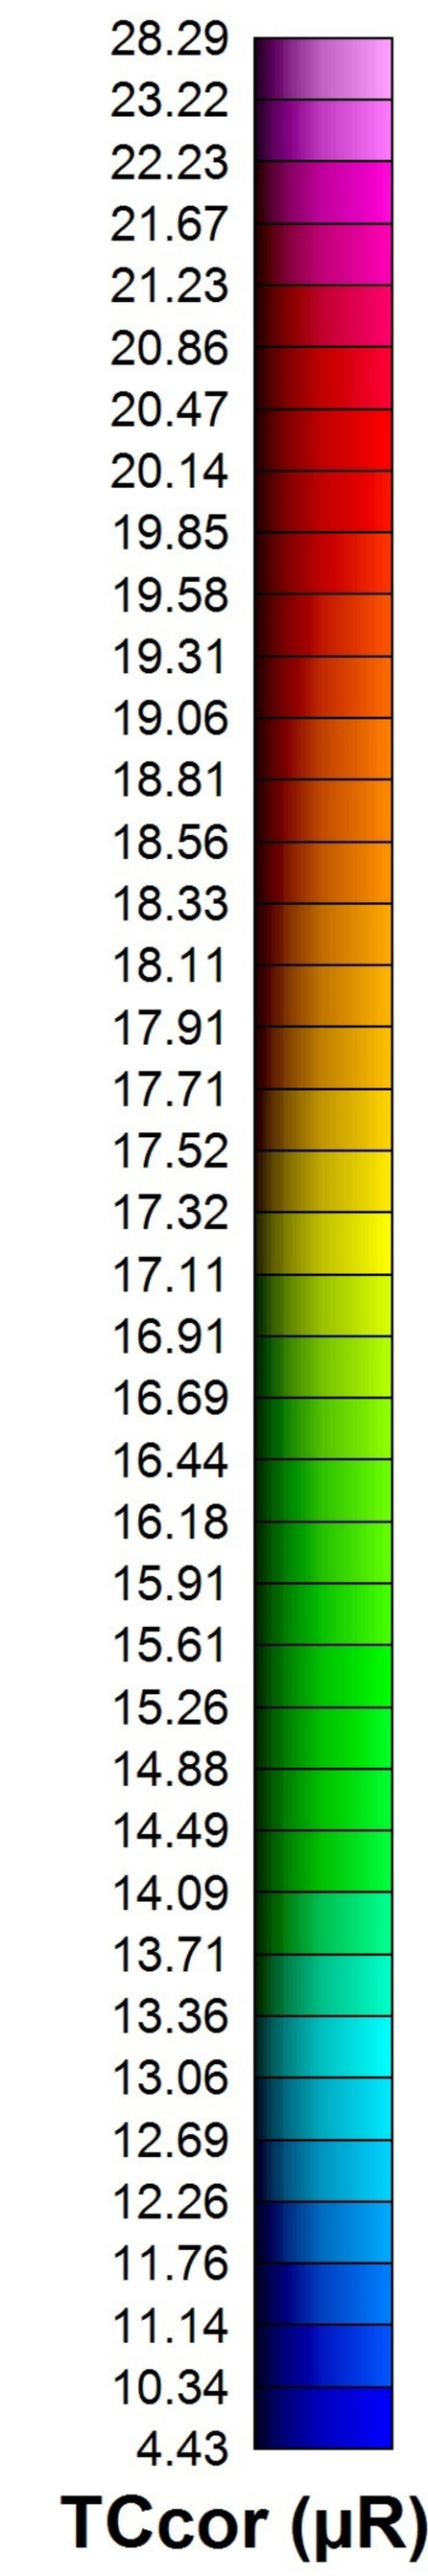

National Topographyic System

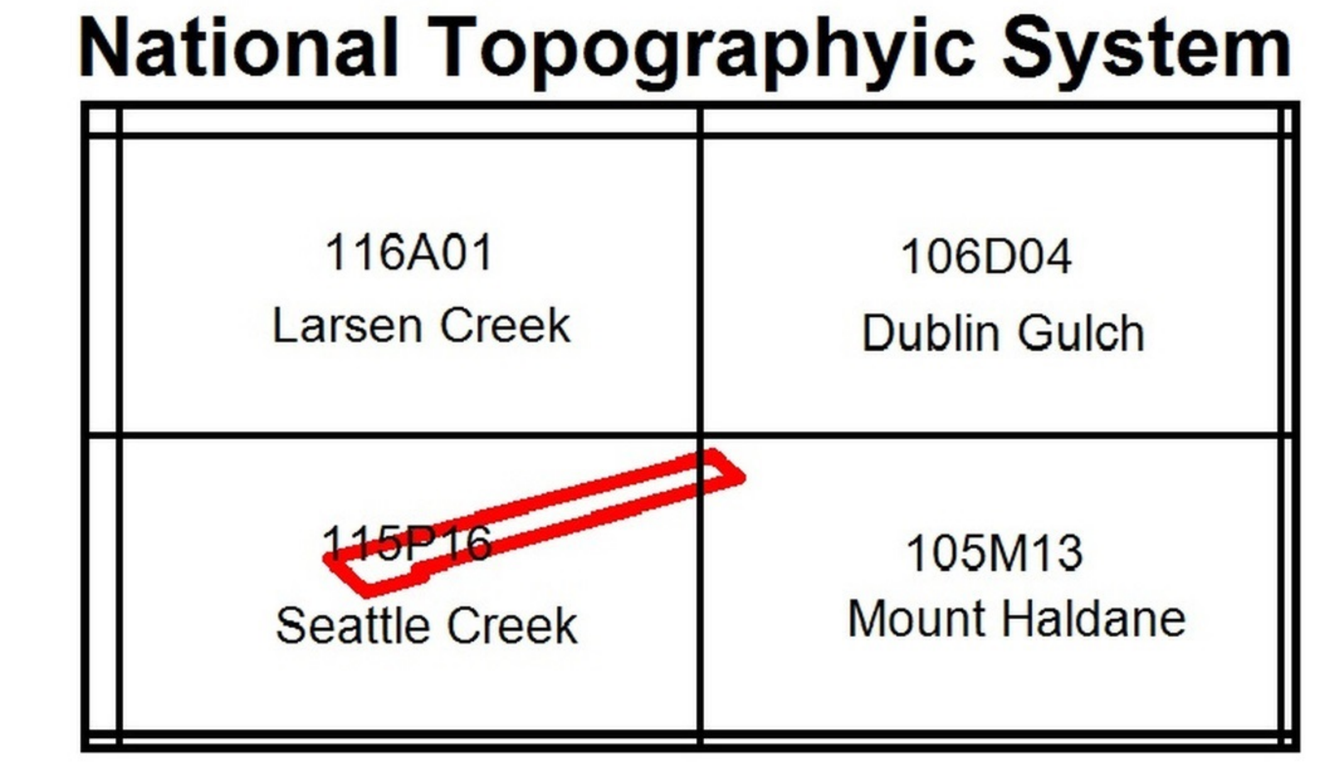

MAP PROJECTION:
Projection: Universal Transverse Mercator Zone 8N
Datum: WGS 84
Local Datum Transform: World

GOODMAN CREEK BLOCK SURVEY SPECIFICATIONS:

Survey Date:	September 19, 2016
Survey Base:	Mayo, Yukon
Aircraft Type:	Eurocopter AS350
Registration:	C-GSVY
Survey Technology:	Magnetic and Radiometric Survey
Mean Flight Height:	35.6 meters
Survey Line Spacing:	150 meters
Survey Line Direction:	150°/330°
Tie Line Spacing:	1500 meters
Tie Line Direction:	060°/240°

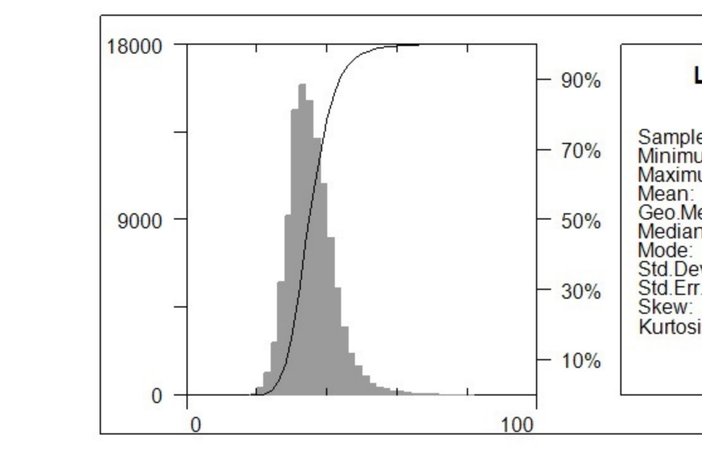

AIRBORNE SURVEY SYSTEM:

Magnetometer Sensor:	Scintrex CS-3 Cesium
Configuration:	Stinger with 3 axis compensation
Sample Rate:	10 Hz
Sensitivity:	0.0006 nT vHz rms
Gamma Ray Spectrometer:	Pico Envirotec GRS-10 Gamma Spectrometer
Downward-Looking Crystals:	16.8 litres of NaI(Tl) crystals
Upward-Looking Crystals:	4.2 litres of NaI(Tl) crystals
Sample Rate:	1 Hz

Legend

Water Bodies (unclassified)..................................

Goodman Creek Survey Block Outline...................

DATA REFERENCE:
Radiometric data have been corrected for effective height, aircraft, cosmic, radon, stripping ratios, and attenuations, and then converted to apparent radioelement concentrations.

TOPOGRAPHIC REFERENCE:
National Topographic Data Base (NTDB), Canada. Ottawa, ON: Government of Canada, Natural Resources Canada, Center for Topographic Information. Contour interval at 100 ft.
URL <http://ftp.geogratis.gc.ca/pub/nrcan_rncan/vector/ntdb_bndt/>[2007]

Scale 1:35000
500 0 500 1000 1500 2000 2500
(meters)
WGS 84 / UTM zone 8N
NTS SHEETS 105M13; 115P16

Nevada Zinc Corporation

Radiometric Map

Goodman Creek Survey Block
Total Count - Equivalent Dose Rate
October 7, 2016

Precision GeoSurveys

Plate10
GC_TCcor

National Topographyic System

116A01 Larsen Creek	106D04 Dublin Gulch
115P16 Seattle Creek	105M13 Mount Haldane

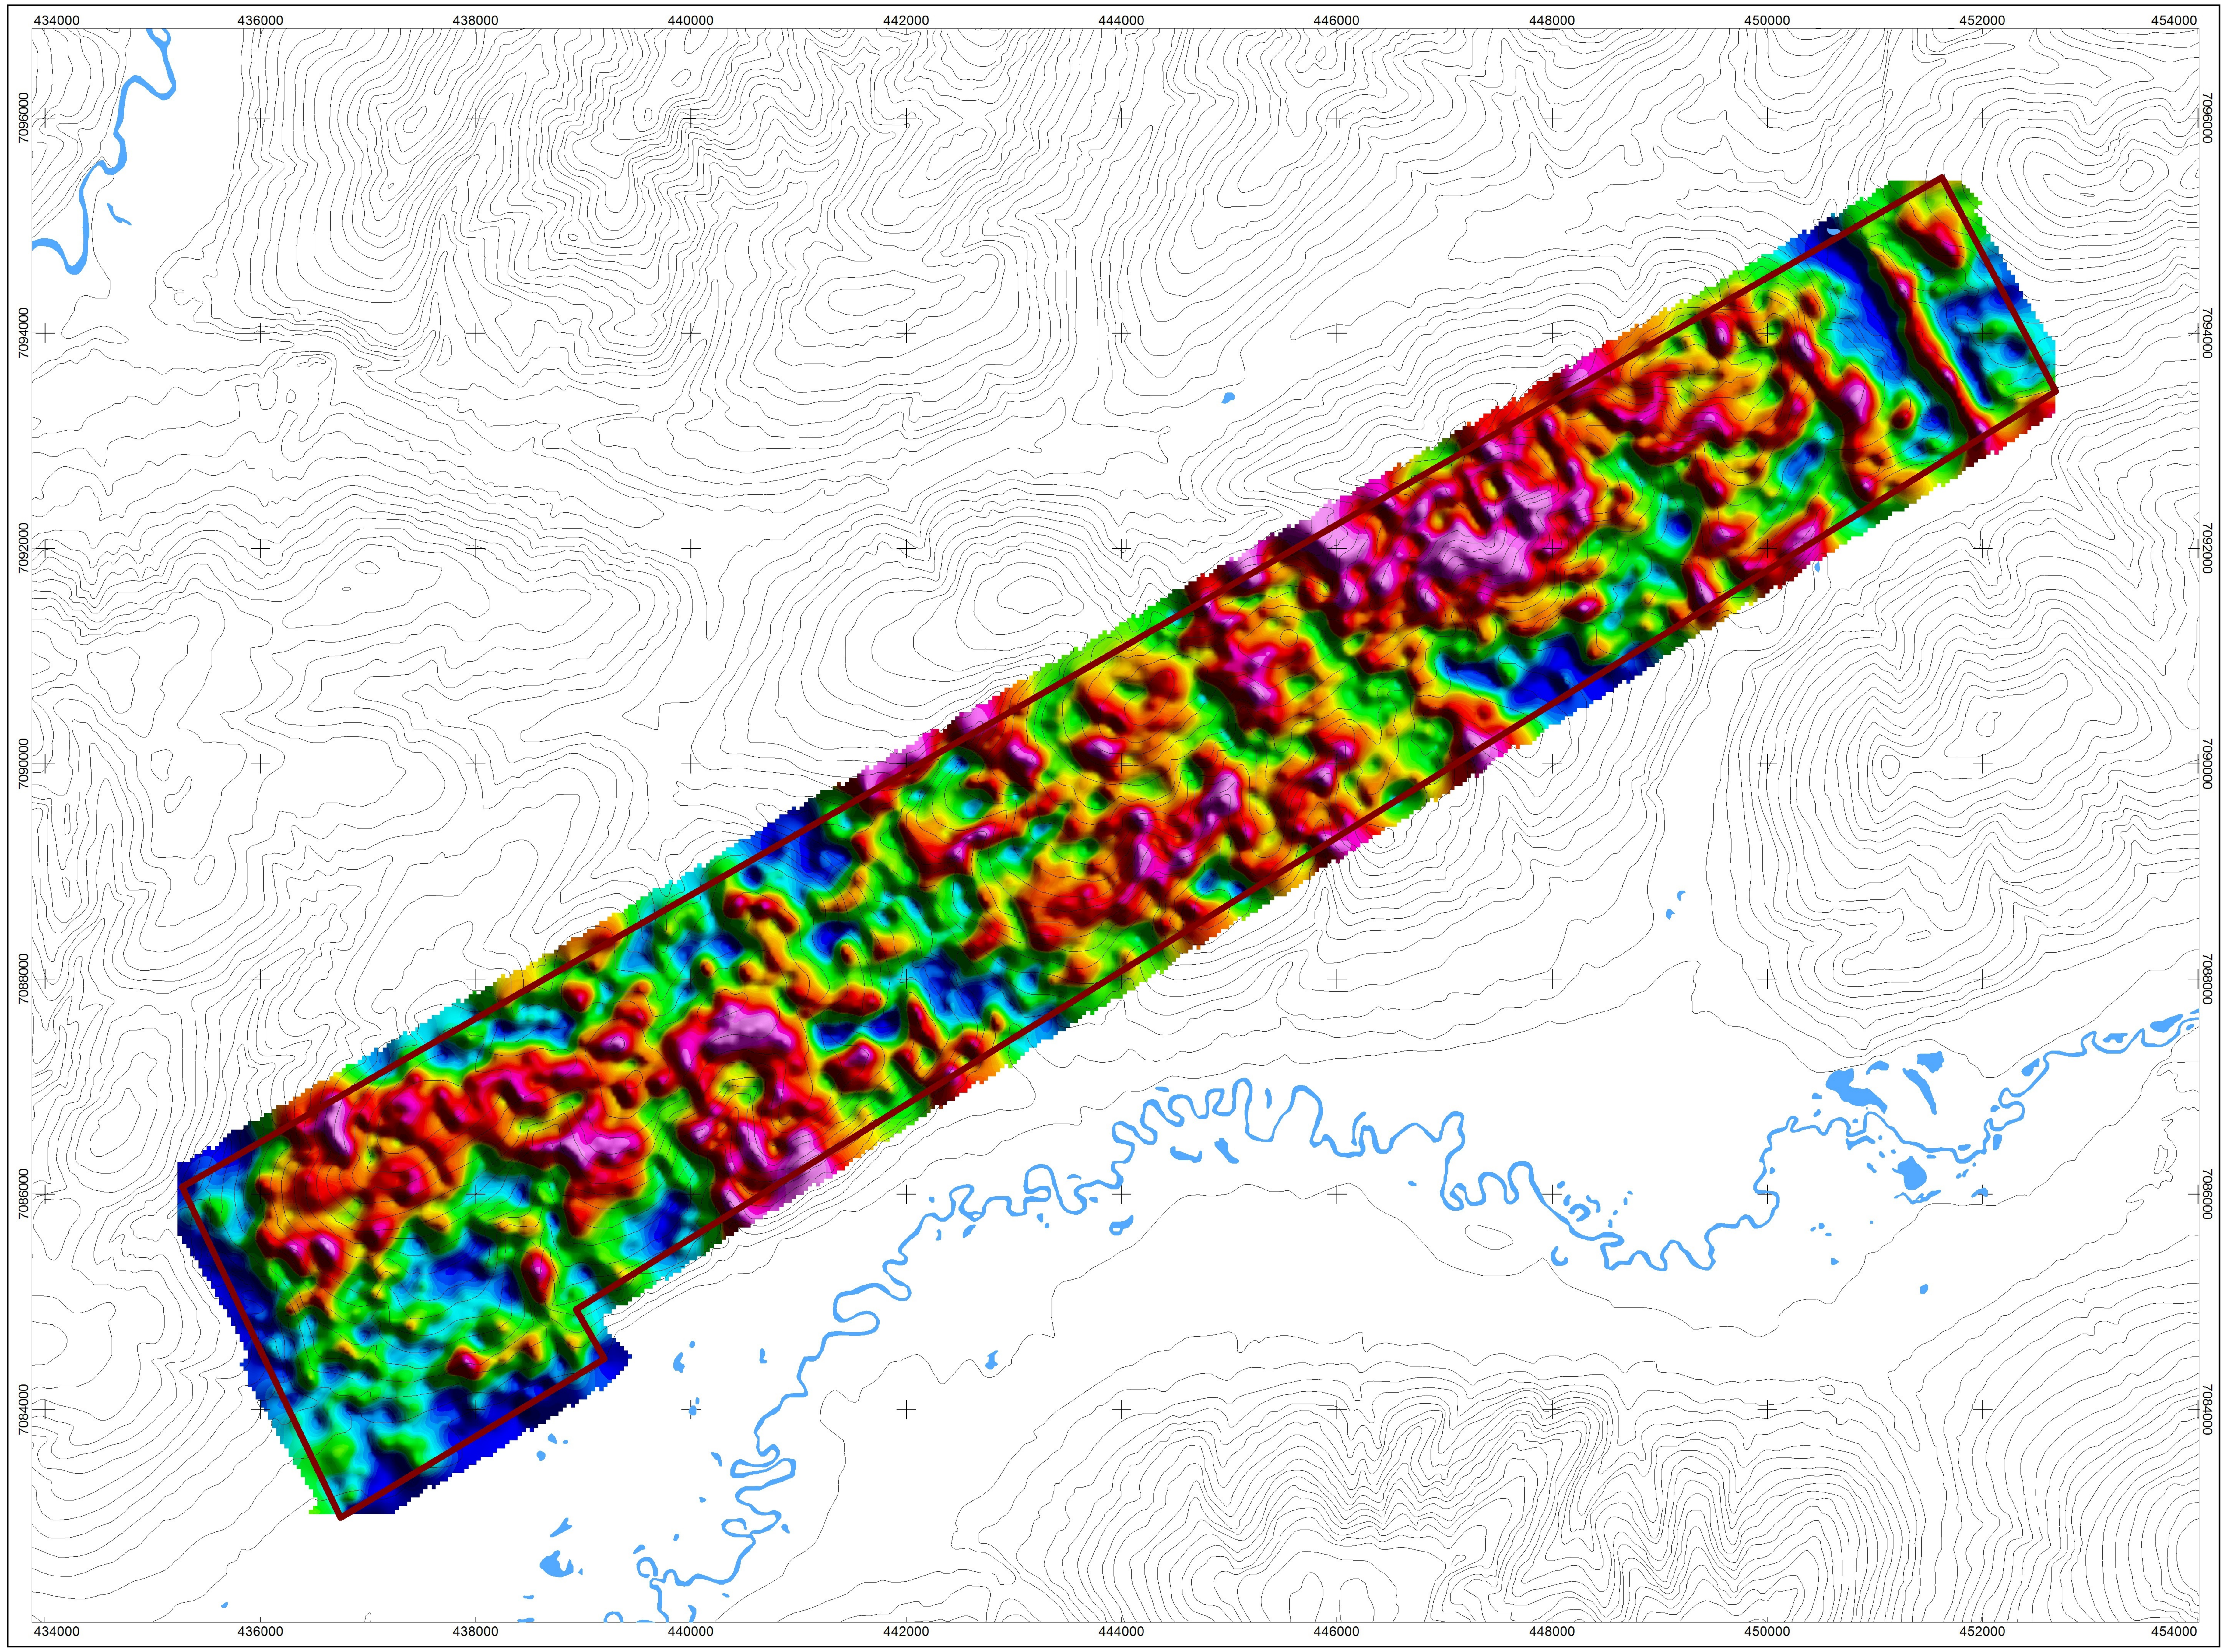

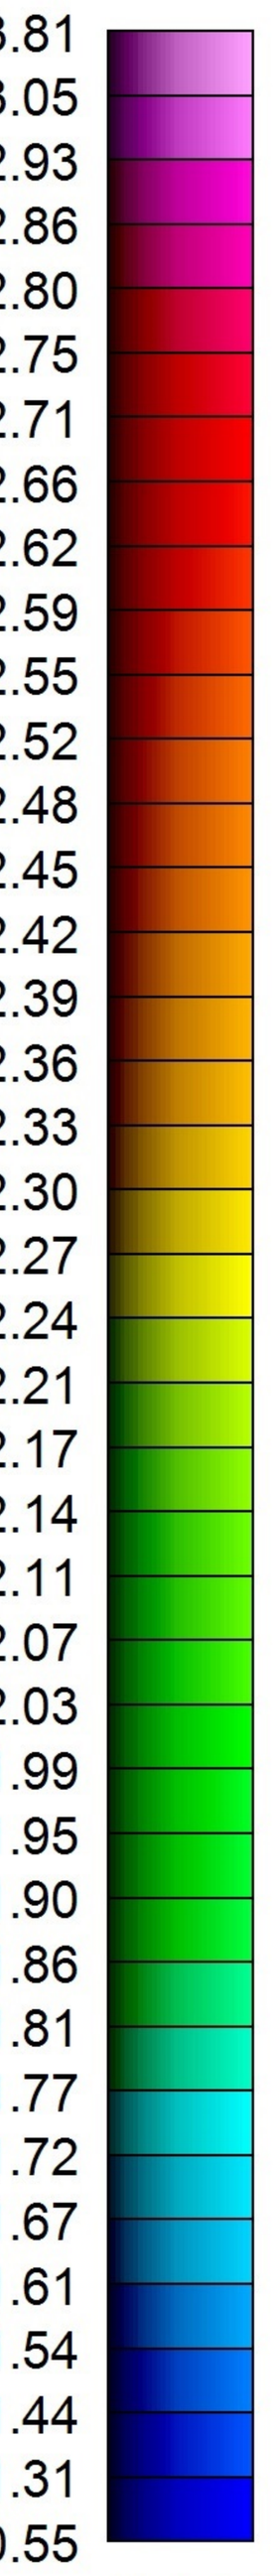

TCexp (µR/Hr)

MAP PROJECTION:

Projection: Universal Transverse Mercator Zone 8N

Datum: WGS 84

Local Datum Transform: World

GOODMAN CREEK BLOCK SURVEY SPECIFICATIONS:

Survey Date:	September 19, 2016
Survey Base:	Mayo, Yukon
Aircraft Type:	Eurocopter AS350
Registration:	C-GSVY
Survey Technology:	Magnetic and Radiometric Survey
Mean Flight Height:	35.6 meters
Survey Line Spacing:	150 meters
Survey Line Direction:	150°/330°
Tie Line Spacing:	1500 meters
Tie Line Direction:	060°/240°

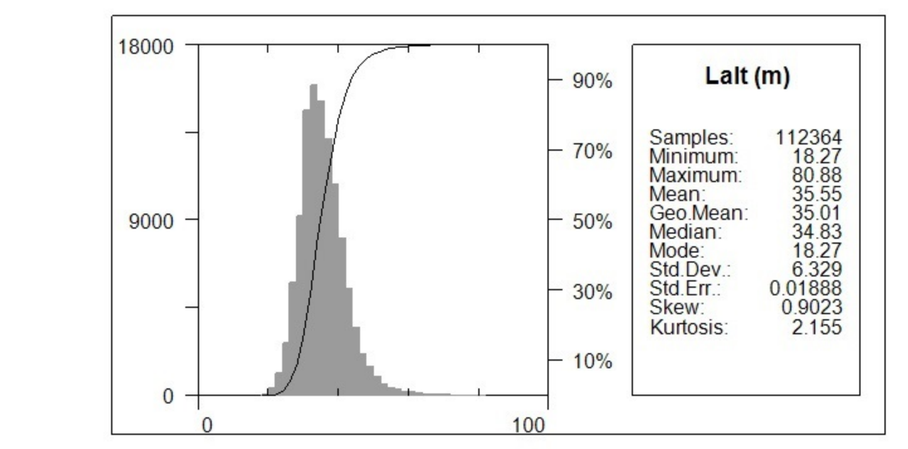

AIRBORNE SURVEY SYSTEM:

Magnetometer Sensor:	Scintrex CS-3 Cesium
Configuration:	Stinger with 3 axis compensation
Sample Rate:	10 Hz
Sensitivity:	0.0006 nT VHz rms
Gamma Ray Spectrometer:	Pico Envirotec GRS-10 Gamma Spectrometer
Downward-Looking Crystals:	16.8 litres of NaI(Tl) crystals
Upward-Looking Crystals:	4.2 litres of NaI(Tl) crystals
Sample Rate:	1 Hz

Legend

Water Bodies (unclassified).................................

Goodman Creek Survey Block Outline...................

DATA REFERENCE:

Radiometric data have been corrected for effective height, aircraft, cosmic, radon, stripping ratios, and attenuations, and then converted to apparent radioelement concentrations.

TOPOGRAPHIC REFERENCE:

National Topographic Data Base (NTDB), Canada. Ottawa, ON: Government of Canada, Natural Resources Canada, Center for Topographic Information. Contour interval at 100 ft.

URL <http://ftp.geogratis.gc.ca/pub/nrcan_rncan/vector/ntdb_bndt/>[2007]

Scale 1:35000

500 0 500 1000 1500 2000 2500

(meters)

WGS 84 / UTM zone 8N
NTS SHEETS 105M13; 115P16

Nevada Zinc Corporation

Radiometric Map

Goodman Creek Survey Block

Total Count - Exposure Rate

October 7, 2016

Precision GeoSurveys

Plate11
GC_TCexp

National Topographic System

116A01 Larsen Creek	106D04 Dublin Gulch
115P16 Seattle Creek	105M13 Mount Haldane

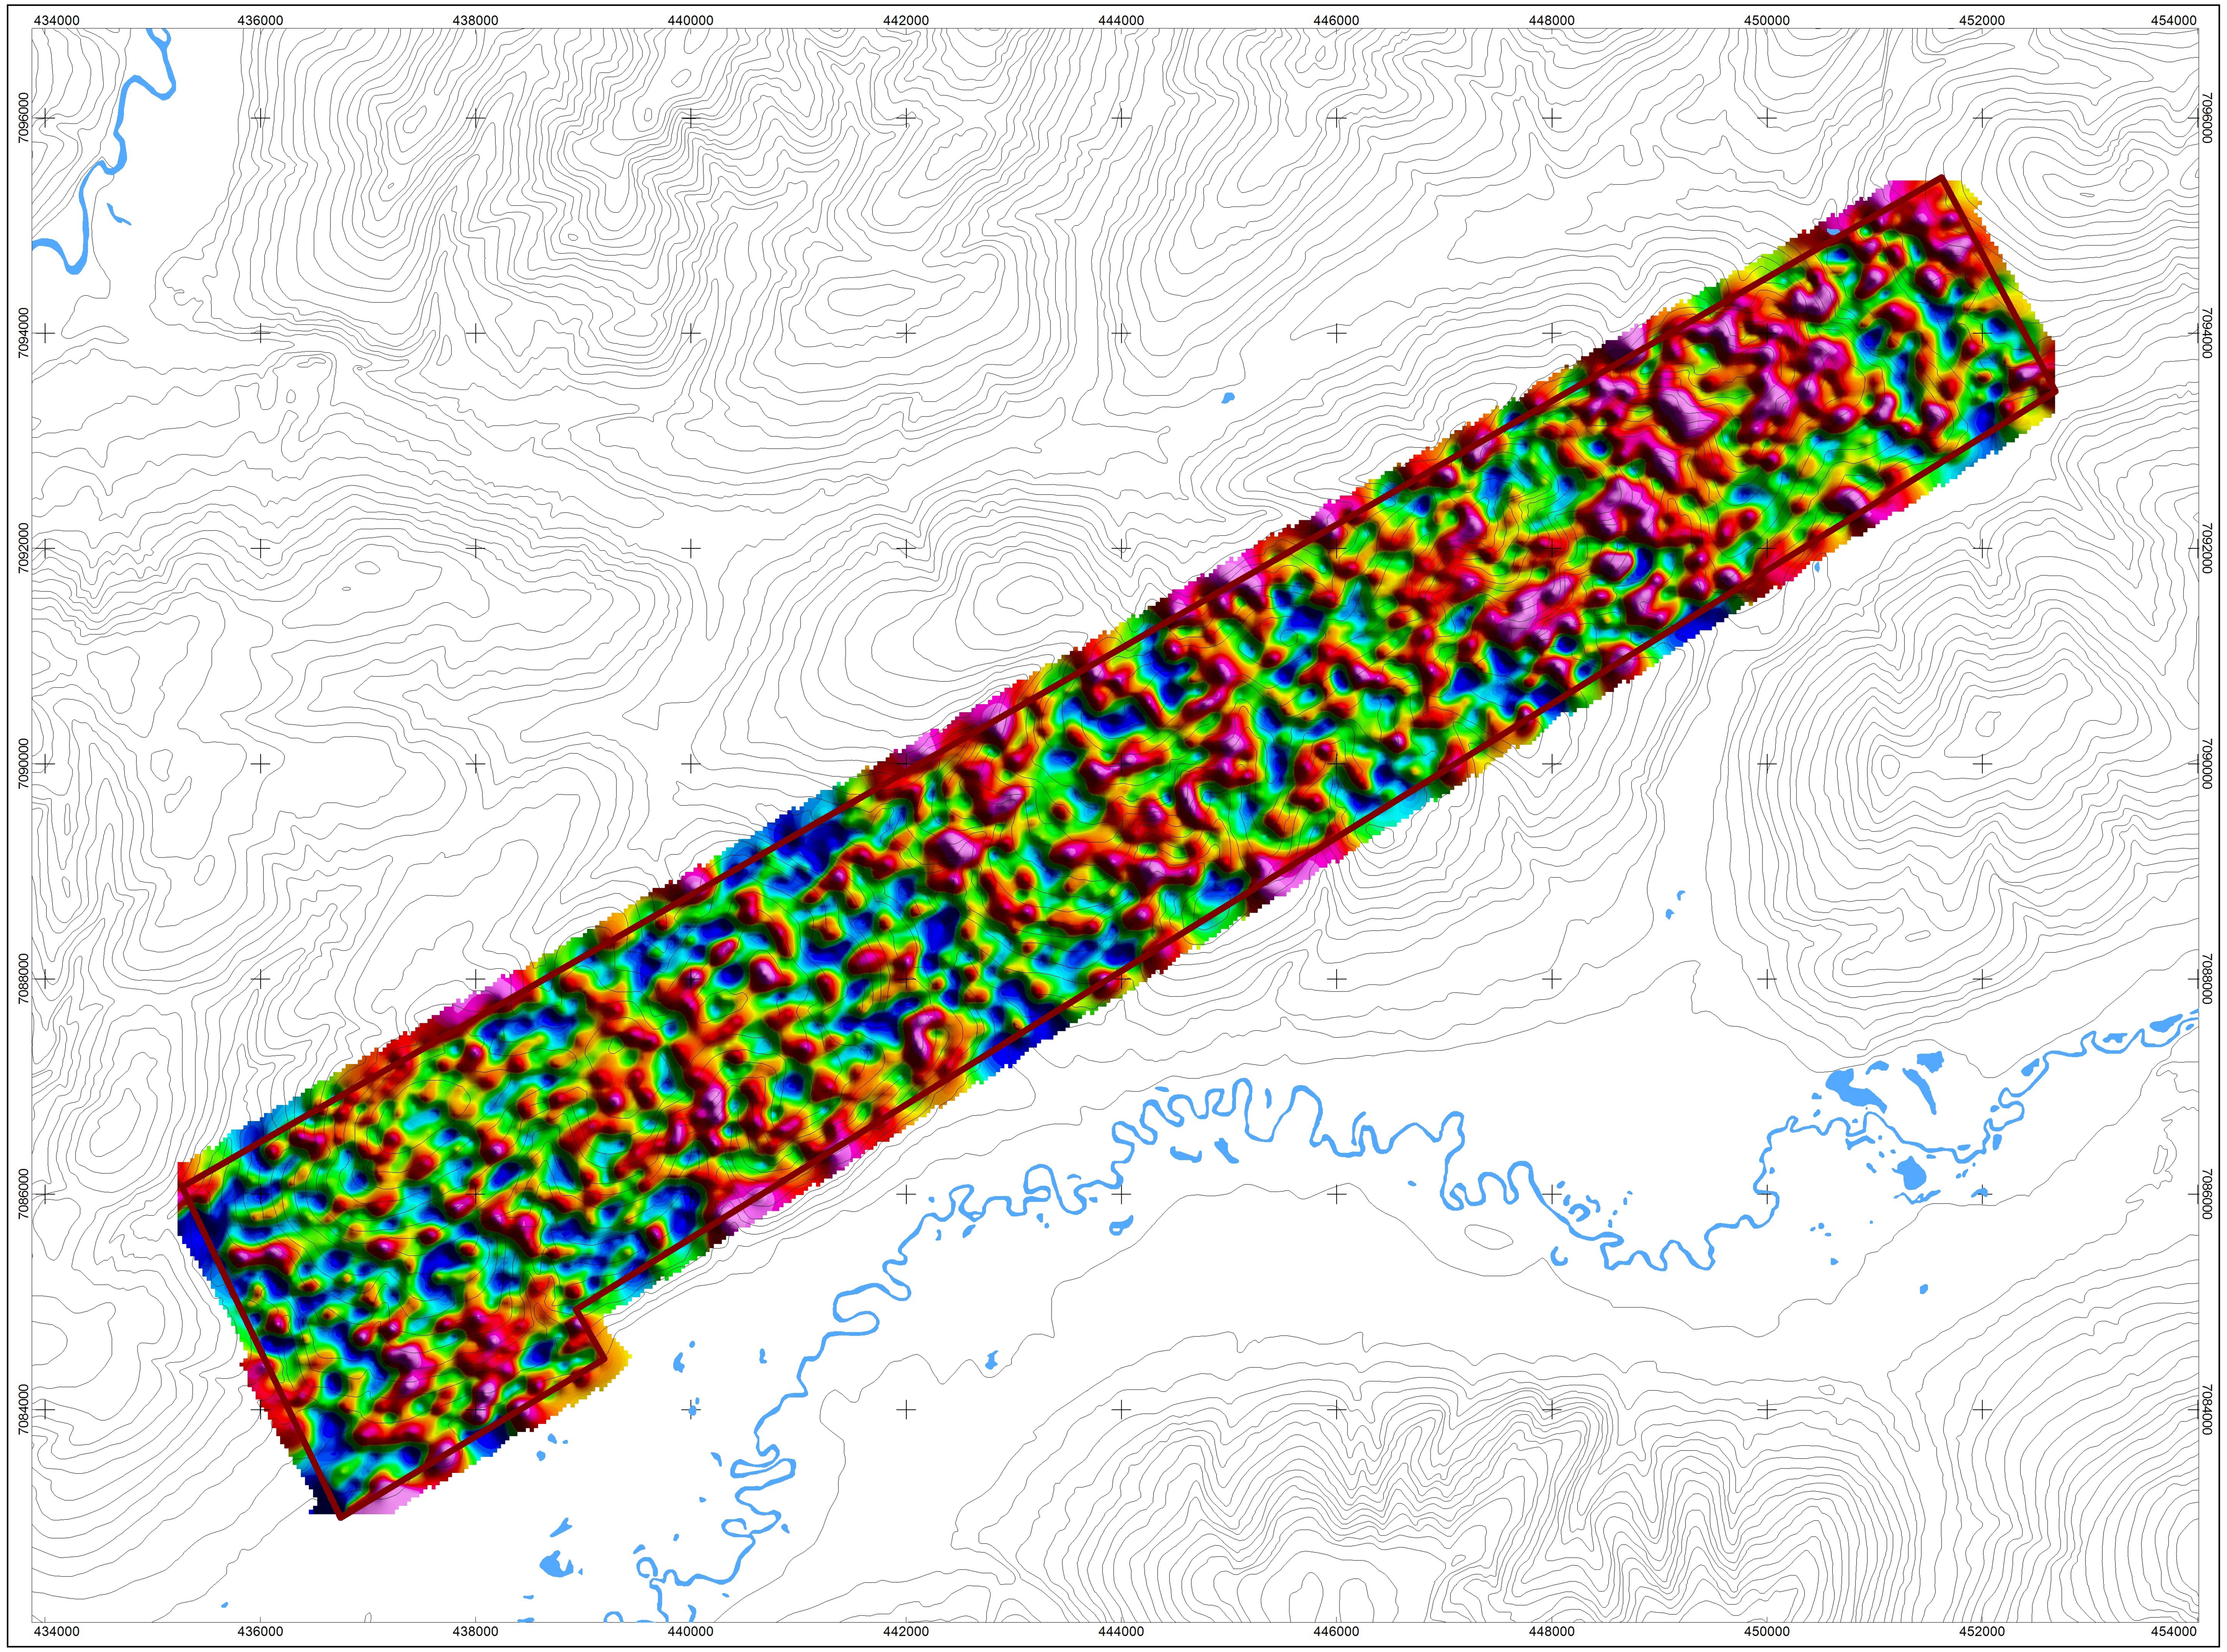

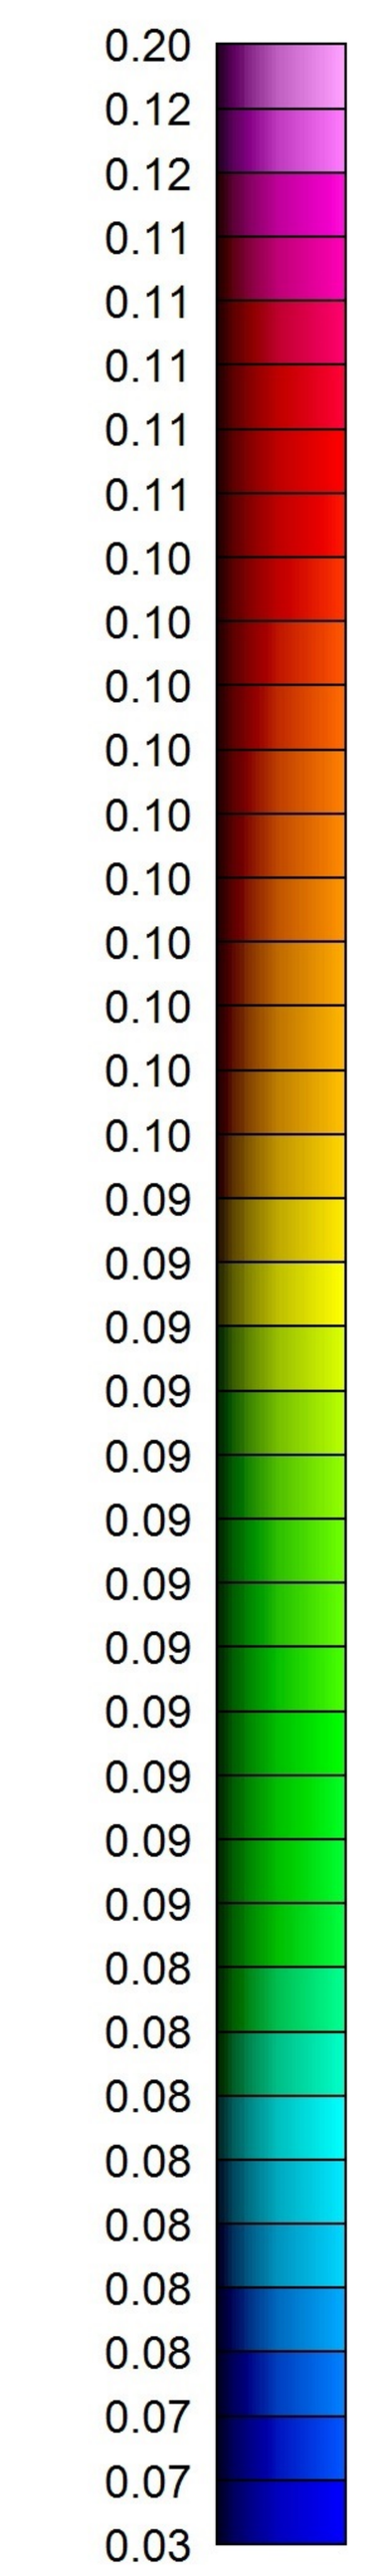

%K/eTh Ratio

MAP PROJECTION:

Projection: Universal Transverse Mercator Zone 8N
Datum: WGS 84
Local Datum Transform: World

GOODMAN CREEK BLOCK SURVEY SPECIFICATIONS:

Survey Date:	September 19, 2016
Survey Base:	Mayo, Yukon
Aircraft Type:	Eurocopter AS350
Registration:	C-GSVY
Survey Technology:	Magnetic and Radiometric Survey
Mean Flight Height:	35.6 meters
Survey Line Spacing:	150 meters
Survey Line Direction:	150°/330°
Tie Line Spacing:	1500 meters
Tie Line Direction:	060°/240°

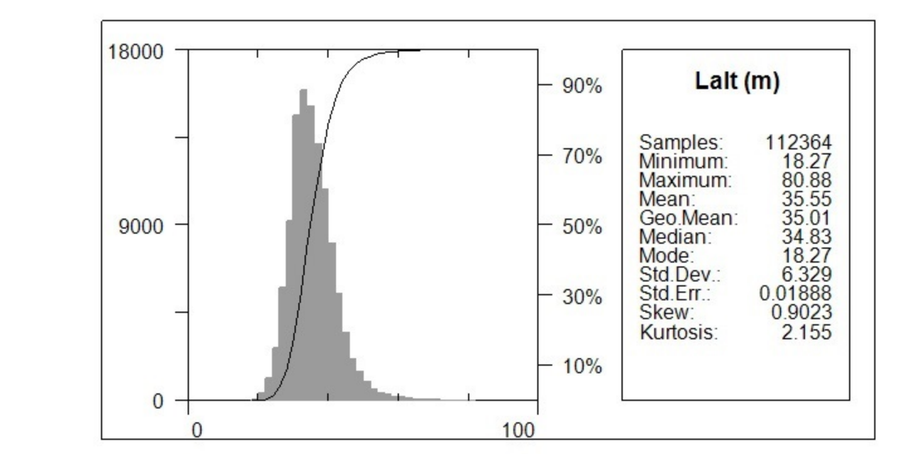

AIRBORNE SURVEY SYSTEM:

Magnetometer Sensor:	Scintrex CS-3 Cesium
Configuration:	Stinger with 3 axis compensation
Sample Rate:	10 Hz
Sensitivity:	0.0006 nT √Hz rms
Gamma Ray Spectrometer:	Pico Envirotec GRS-10 Gamma Spectrometer
Downward-Looking Crystals:	16.8 litres of NaI(Tl) crystals
Upward-Looking Crystals:	4.2 litres of NaI(Tl) crystals
Sample Rate:	1 Hz

Legend

Water Bodies (unclassified)................................

Goodman Creek Survey Block Outline..................

DATA REFERENCE:

Radiometric data have been corrected for effective height, aircraft, cosmic, radon, stripping ratios, and attenuations, and then converted to apparent radioelement concentrations.

TOPOGRAPHIC REFERENCE:

National Topographic Data Base (NTDB), Canada. Ottawa, ON: Government of Canada, Natural Resources Canada, Center for Topographic Information. Contour interval at 100 ft.
URL <http://ftp.geogratis.gc.ca/pub/nrcan_rncan/vector/ntdb_bndt/>[2007]

Scale 1:35000

500 0 500 1000 1500 2000 2500

(meters)

WGS 84 / UTM zone 8N
NTS SHEETS 105M13; 115P16

Nevada Zinc Corporation

Radiometric Map

Goodman Creek Survey Block

Potassium over Thorium Ratio

October 7, 2016

Precision GeoSurveys

Plate12
GC_%K/eTh

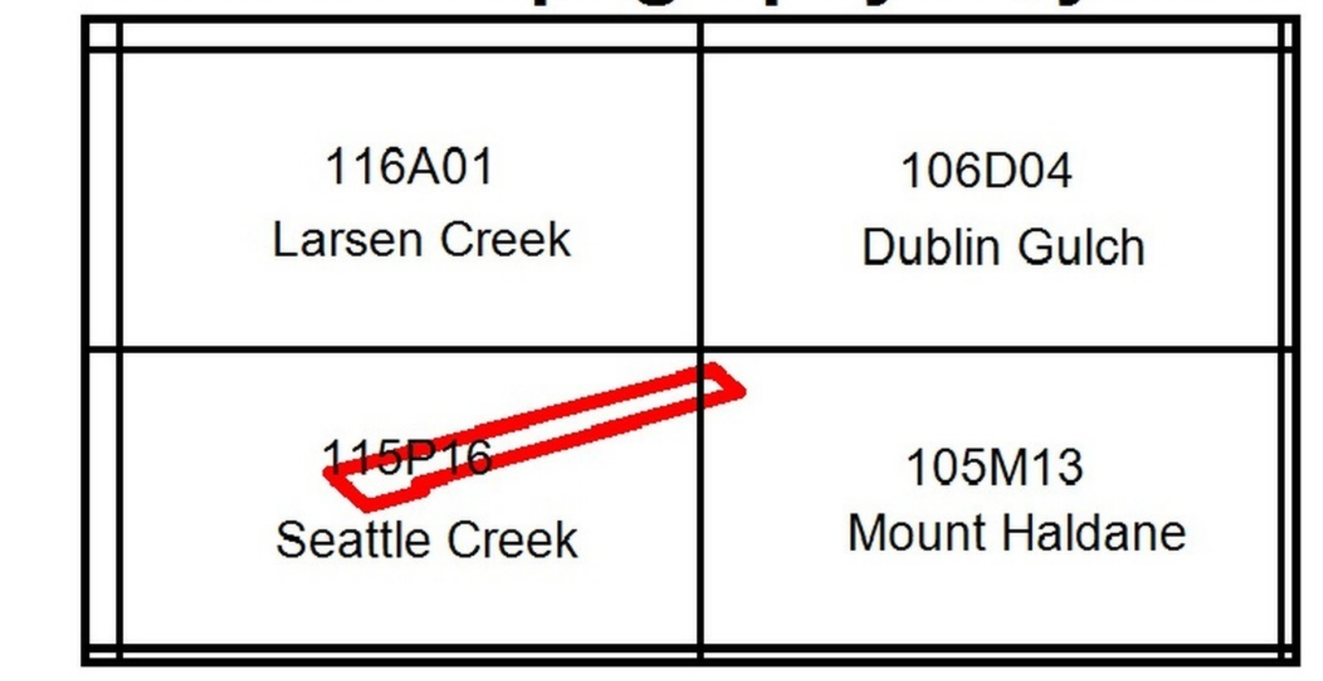

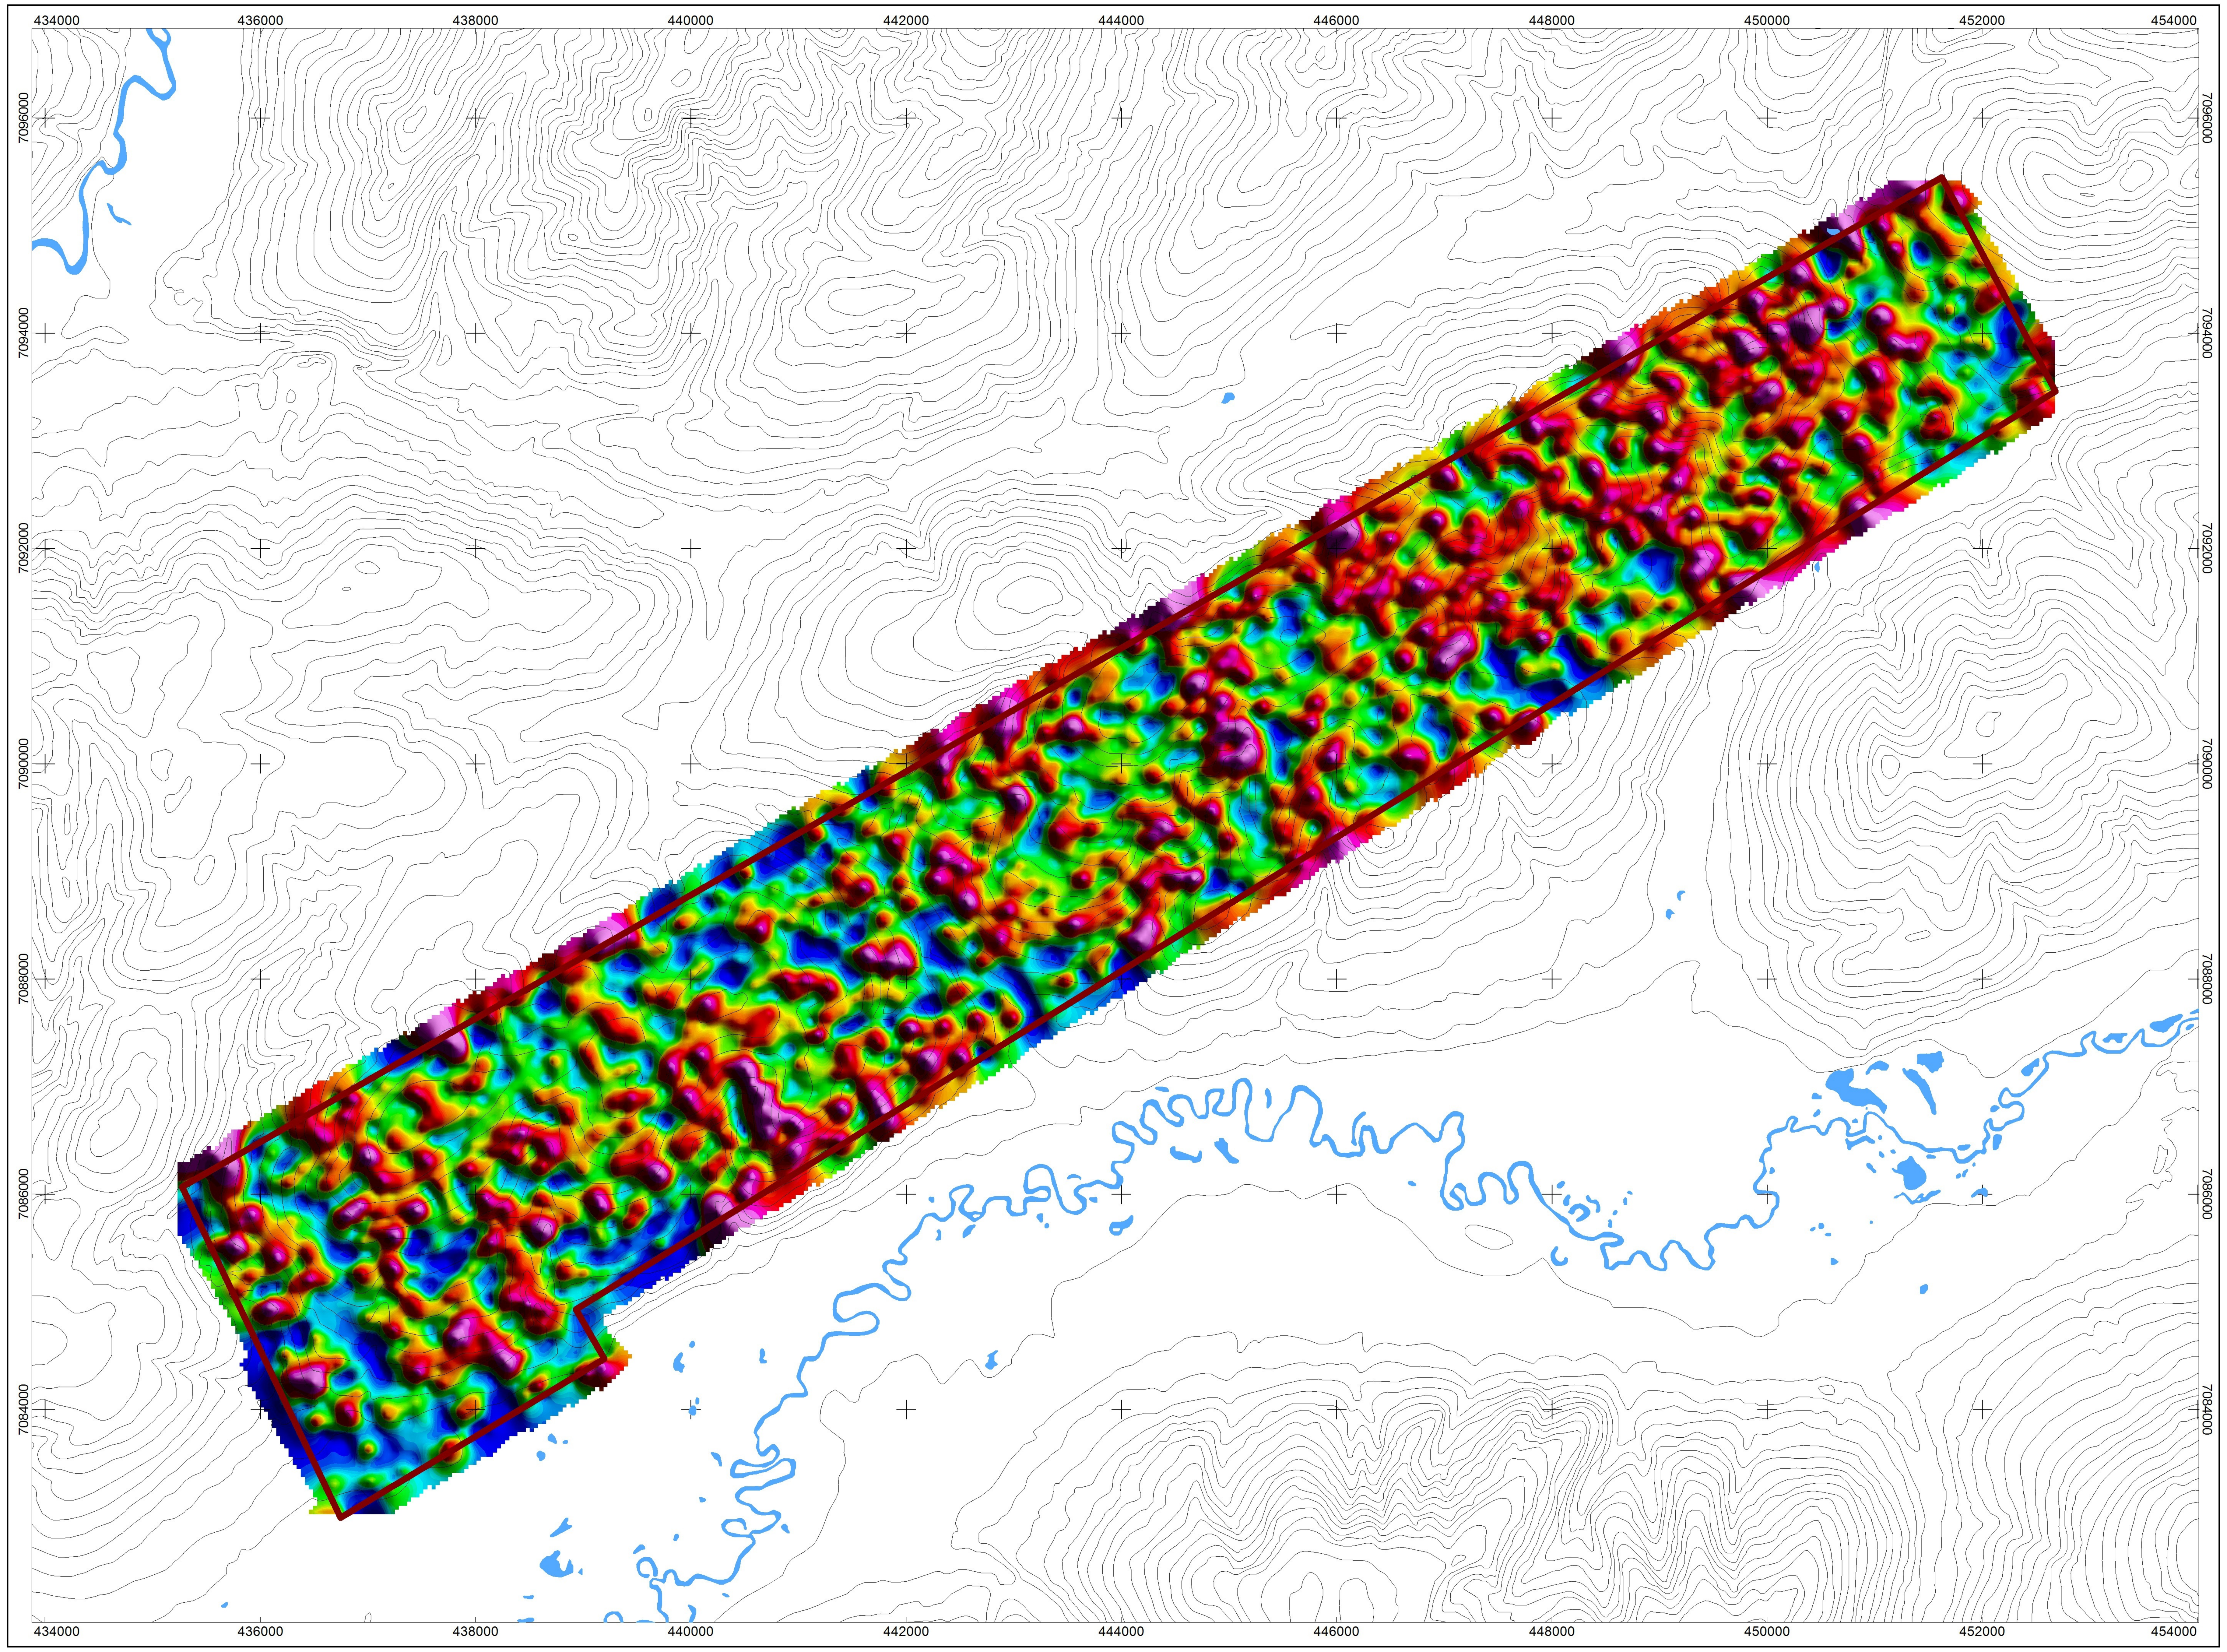

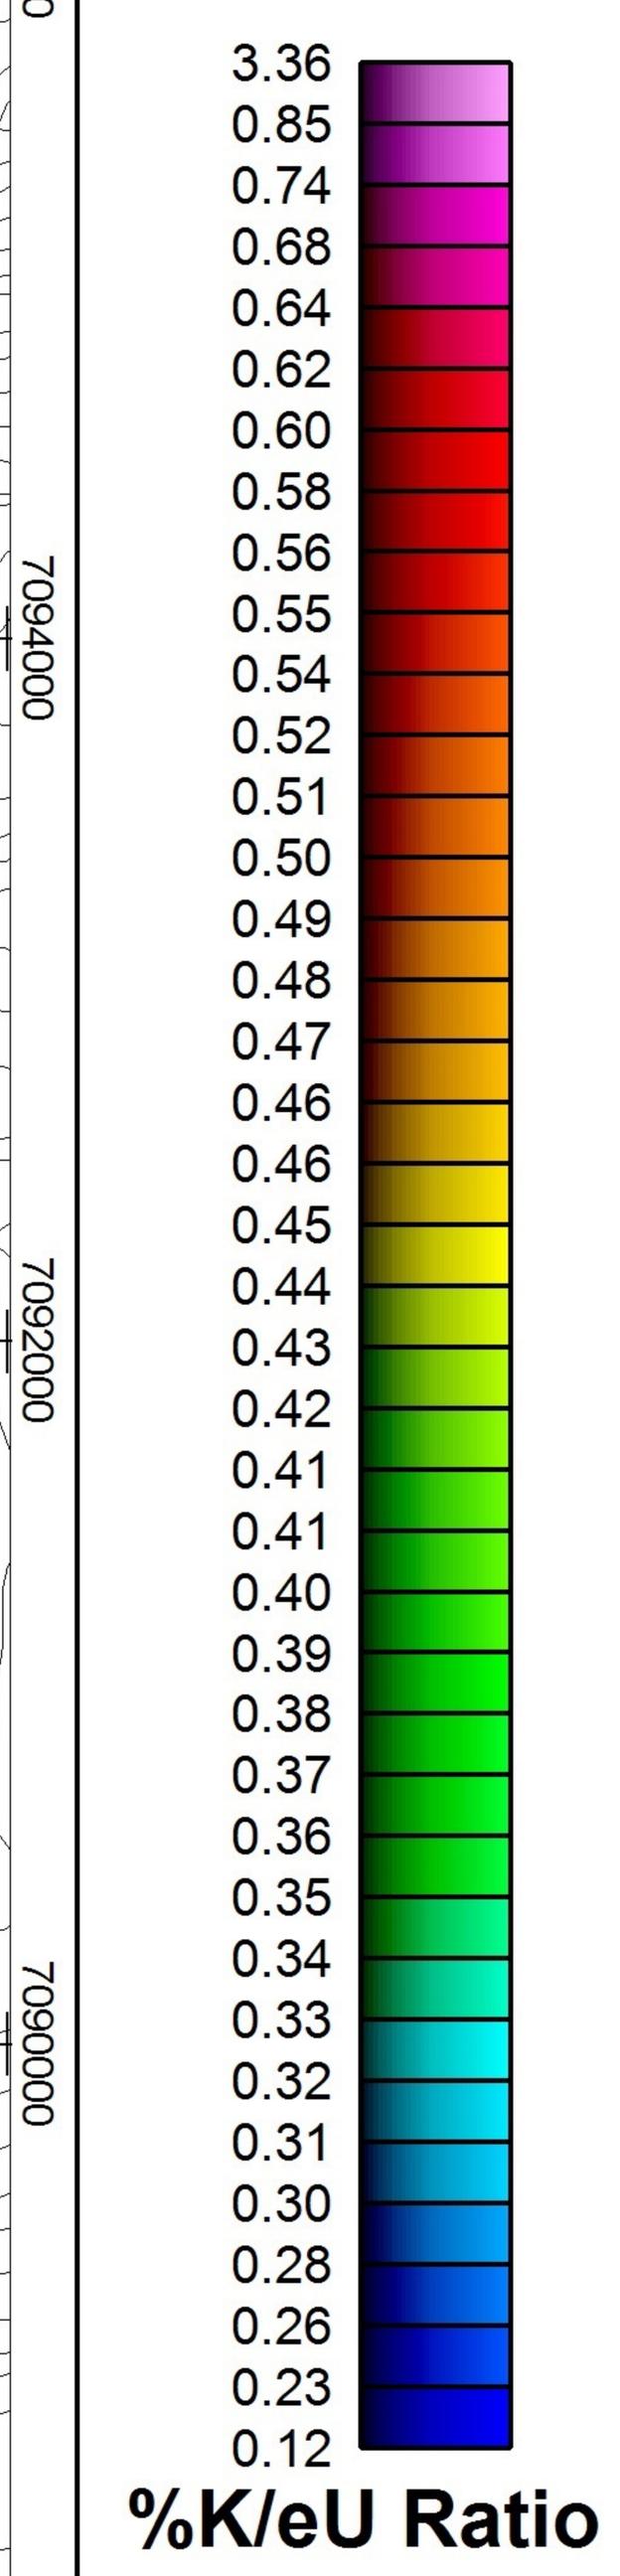

MAP PROJECTION:

Projection: Universal Transverse Mercator Zone 8N

Datum: WGS 84

Local Datum Transform: World

GOODMAN CREEK BLOCK SURVEY SPECIFICATIONS:

Survey Date:	September 19, 2016
Survey Base:	Mayo, Yukon
Aircraft Type:	Eurocopter AS350
Registration:	C-GSVY
Survey Technology:	Magnetic and Radiometric Survey
Mean Flight Height:	35.6 meters
Survey Line Spacing:	150 meters
Survey Line Direction:	150°/330°
Tie Line Spacing:	1500 meters
Tie Line Direction:	060°/240°

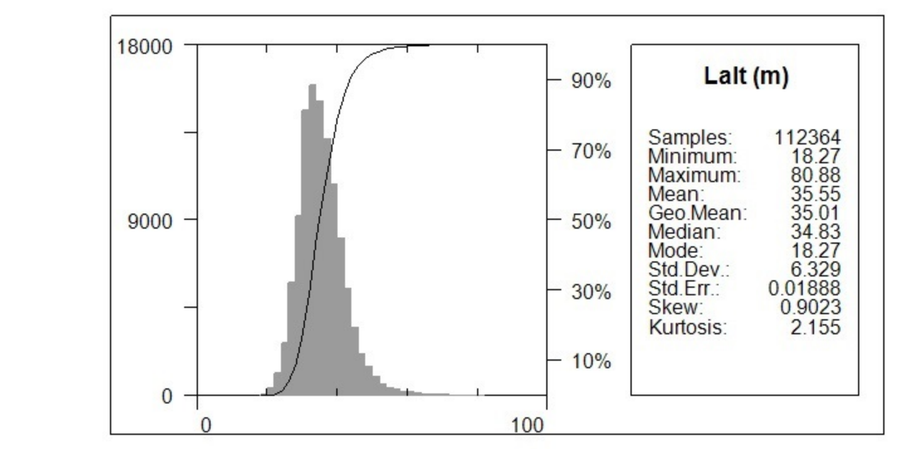

AIRBORNE SURVEY SYSTEM:

Magnetometer Sensor:	Scintrex CS-3 Cesium
Configuration:	Stinger with 3 axis compensation
Sample Rate:	10 Hz
Sensitivity:	0.0006 nT √Hz rms
Gamma Ray Spectrometer:	Pico Envirotec GRS-10 Gamma Spectrometer
Downward-Looking Crystals:	16.8 litres of NaI(Tl) crystals
Upward-Looking Crystals:	4.2 litres of NaI(Tl) crystals
Sample Rate:	1 Hz

Legend

Water Bodies (unclassified)................................

Goodman Creek Survey Block Outline...................

DATA REFERENCE:

Radiometric data have been corrected for effective height, aircraft, cosmic, radon, stripping ratios, and attenuations, and then converted to apparent radioelement concentrations.

TOPOGRAPHIC REFERENCE:

National Topographic Data Base (NTDB), Canada. Ottawa, ON: Government of Canada, Natural Resources Canada, Center for Topographic Information. Contour interval at 100 ft.

URL <http://ftp.geogratis.gc.ca/pub/nrcan_rncan/vector/ntdb_bndt/>[2007]



Nevada Zinc Corporation

Radiometric Map

Goodman Creek Survey Block

Potassium over Uranium Ratio

October 7, 2016

Precision GeoSurveys

Plate13
GC_%K/eU

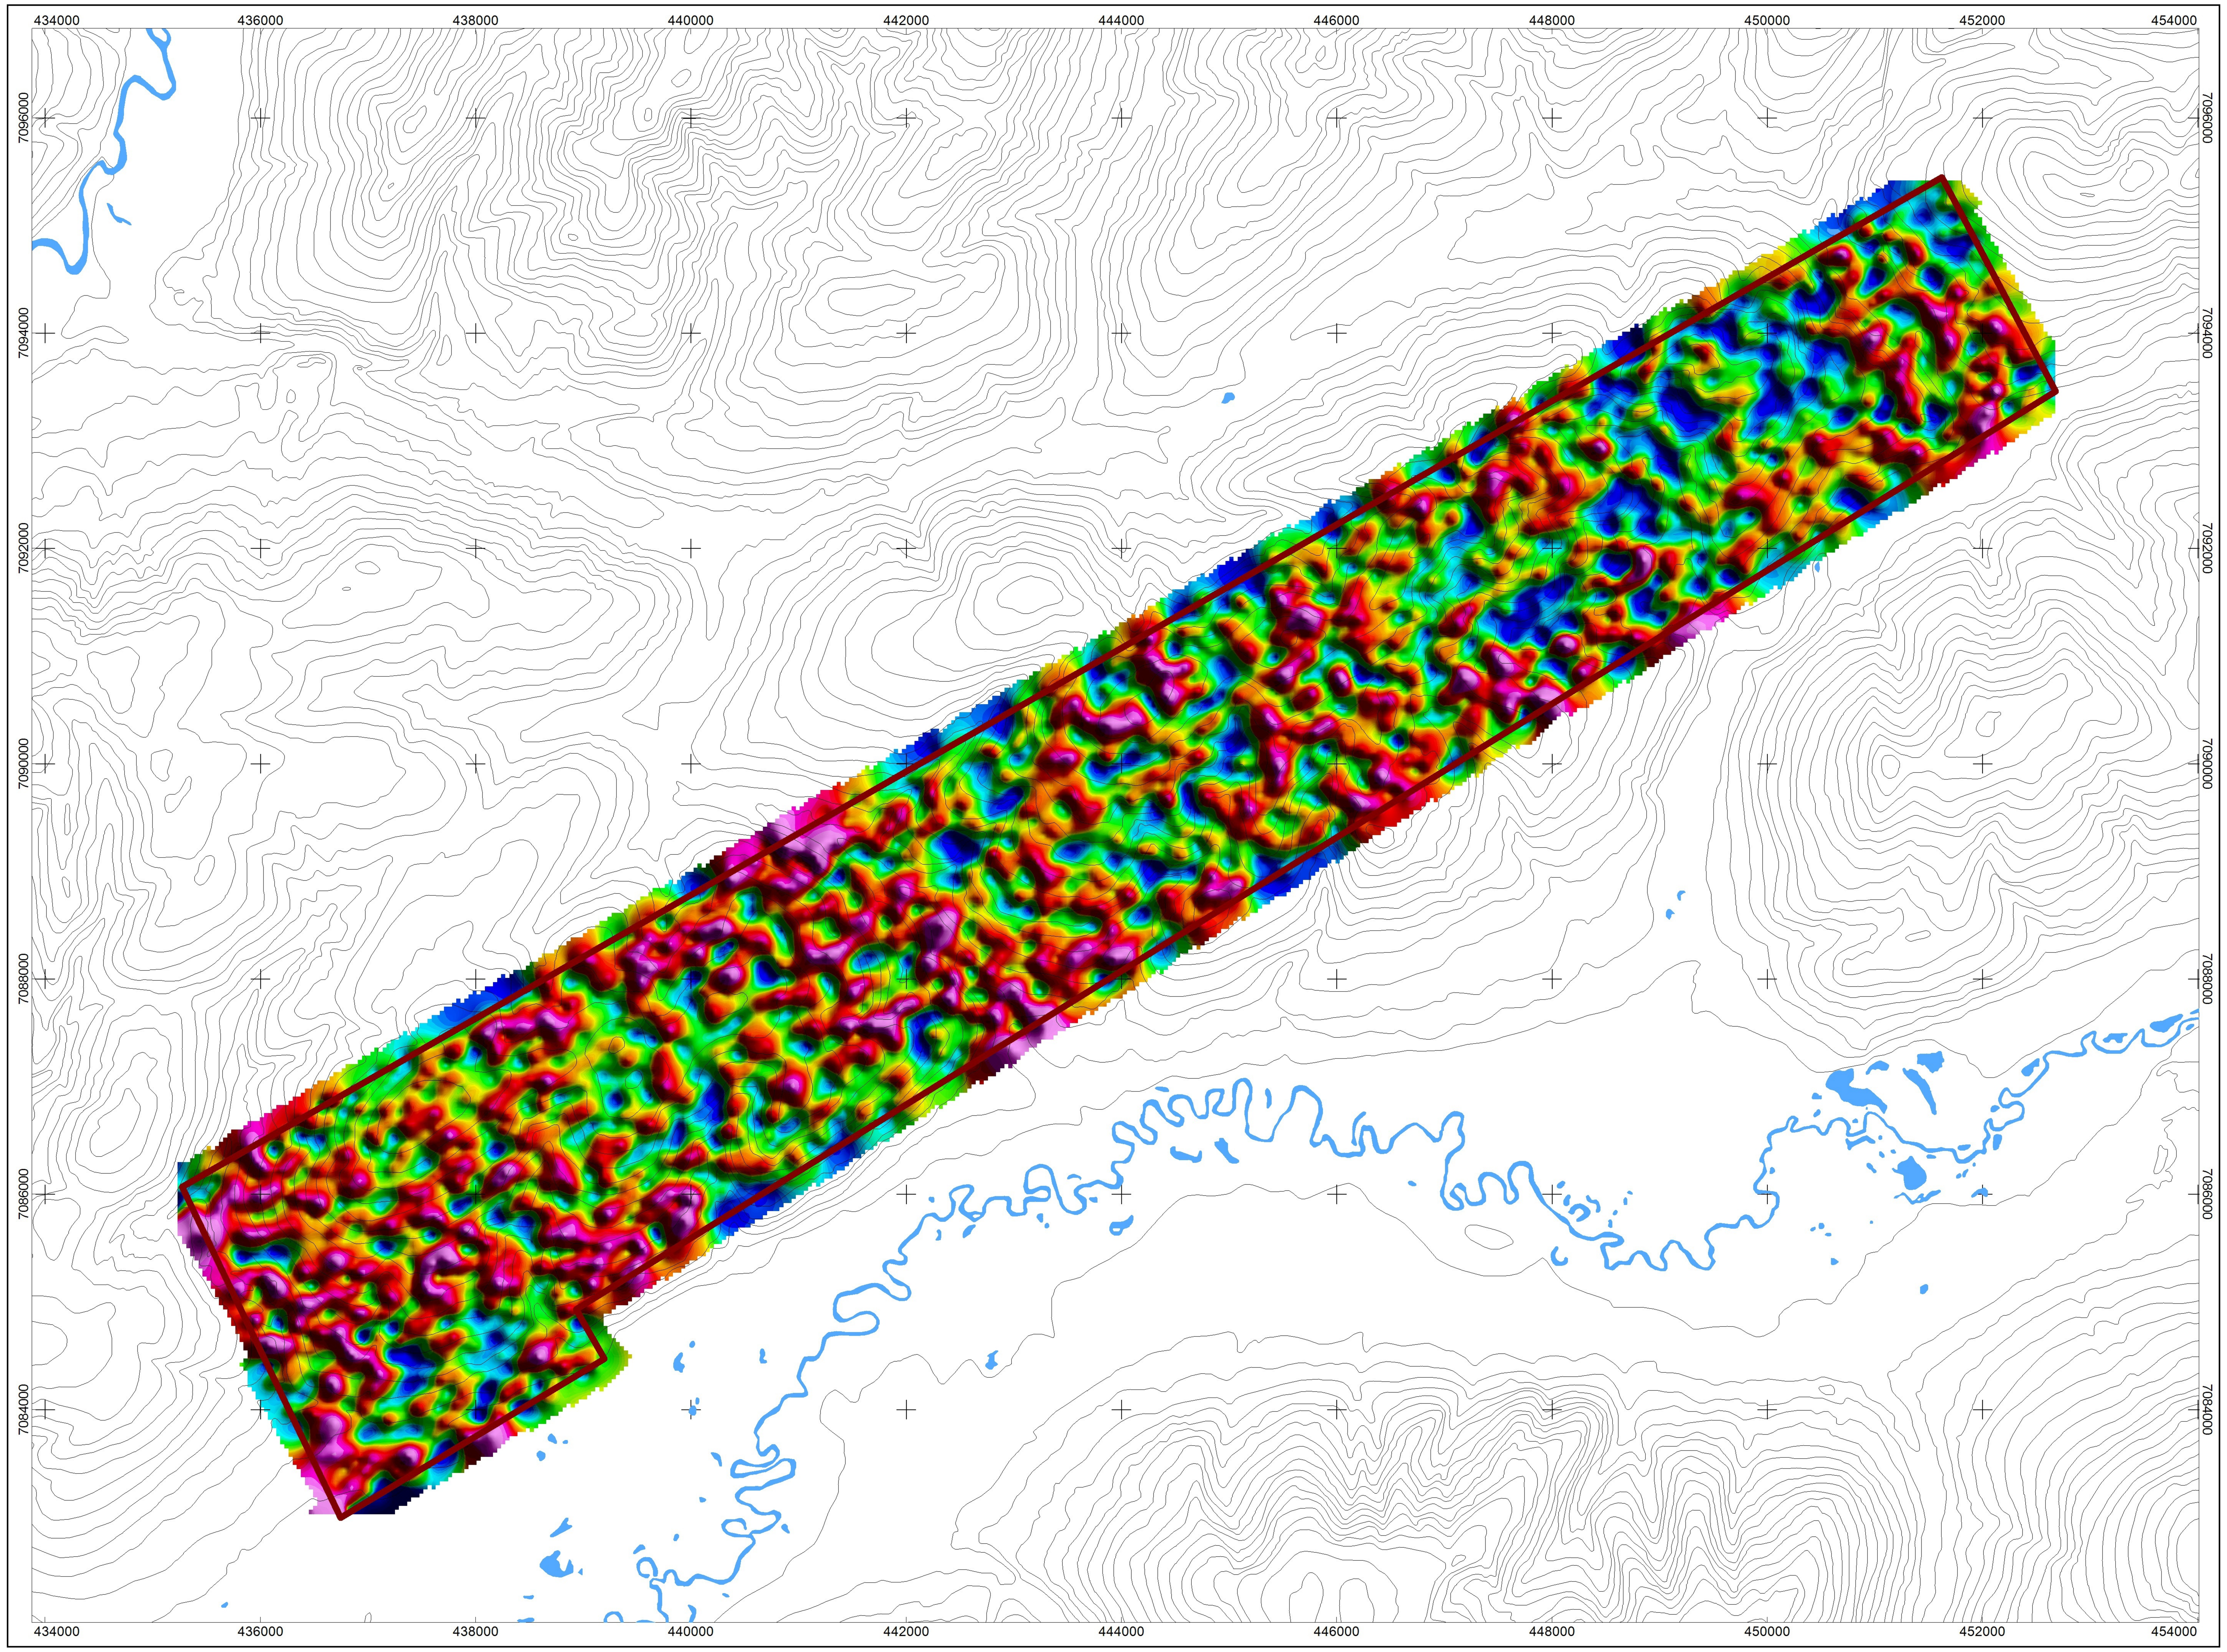

National Topographyic System

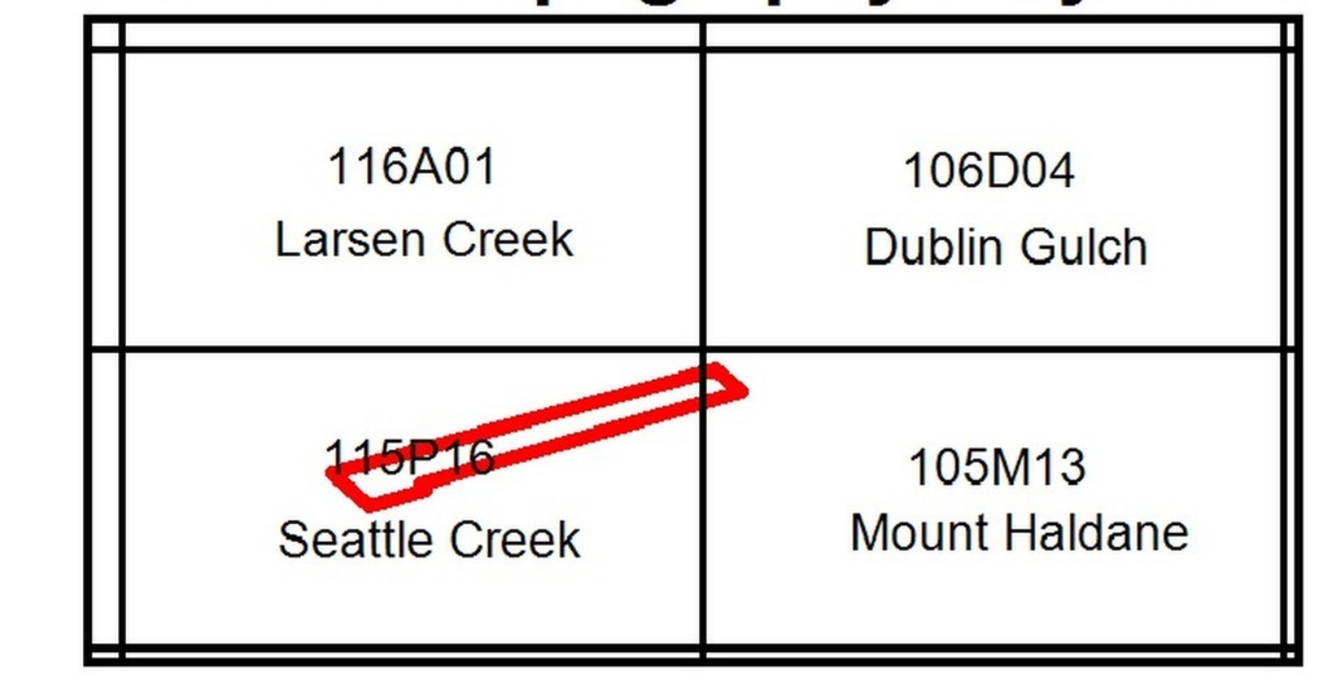

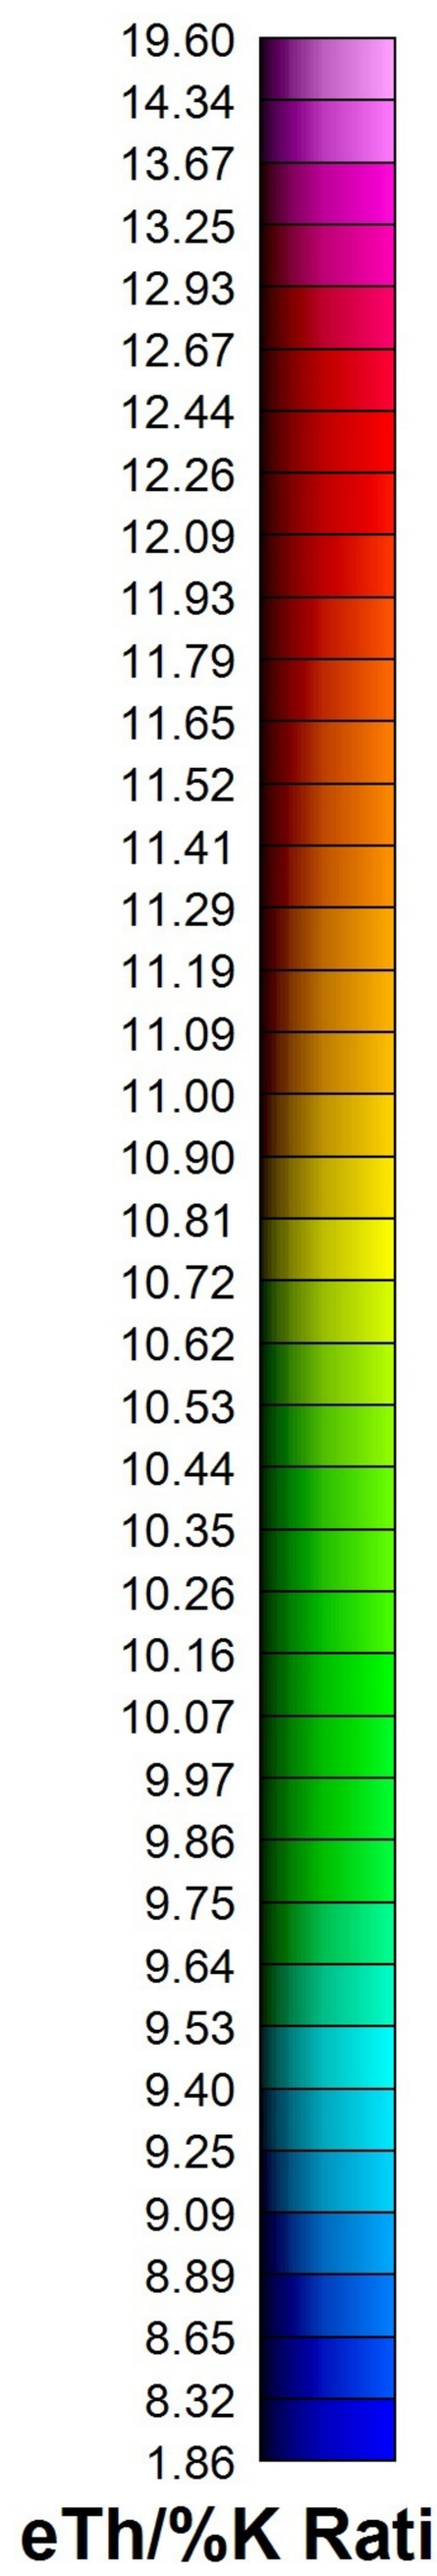

MAP PROJECTION:

Projection: Universal Transverse Mercator Zone 8N

Datum: WGS 84

Local Datum Transform: World

GOODMAN CREEK BLOCK SURVEY SPECIFICATIONS:

Survey Date:	September 19, 2016
Survey Base:	Mayo, Yukon
Aircraft Type:	Eurocopter AS350
Registration:	C-GSVY
Survey Technology:	Magnetic and Radiometric Survey
Mean Flight Height:	35.6 meters
Survey Line Spacing:	150 meters
Survey Line Direction:	150°/330°
Tie Line Spacing:	1500 meters
Tie Line Direction:	060°/240°

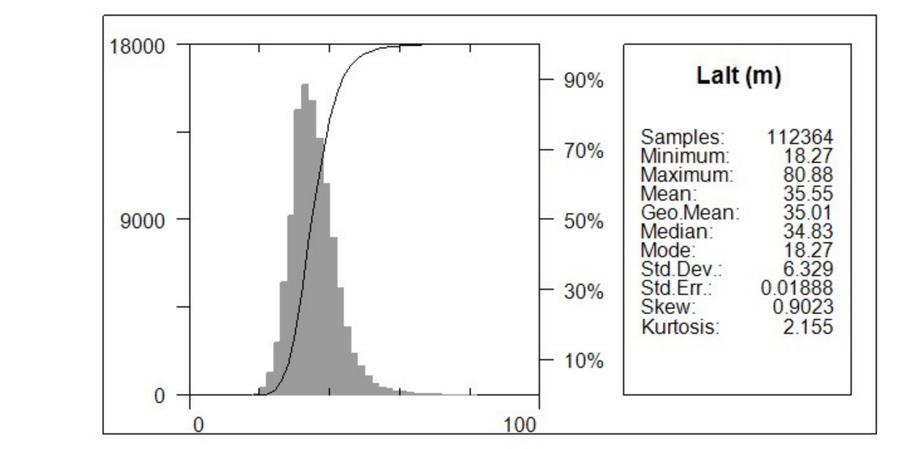

AIRBORNE SURVEY SYSTEM:

Magnetometer Sensor:	Scintrex CS-3 Cesium
Configuration:	Stinger with 3 axis compensation
Sample Rate:	10 Hz
Sensitivity:	0.0006 nT √Hz rms
Gamma Ray Spectrometer:	Pico Envirotec GRS-10 Gamma Spectrometer
Downward-Looking Crystals:	16.8 litres of NaI(Tl) crystals
Upward-Looking Crystals:	4.2 litres of NaI(Tl) crystals
Sample Rate:	1 Hz

Legend

Water Bodies (unclassified).................................

Goodman Creek Survey Block Outline...................

DATA REFERENCE:

Radiometric data have been corrected for effective height, aircraft, cosmic, radon, stripping ratios, and attenuations, and then converted to apparent radioelement concentrations.

TOPOGRAPHIC REFERENCE:

National Topographic Data Base (NTDB), Canada. Ottawa, ON: Government of Canada, Natural Resources Canada, Center for Topographic Information. Contour interval at 100 ft.
URL <http://ftp.geogratis.gc.ca/pub/nrcan_rncan/vector/ntdb_bndt/>[2007]

Scale 1:35000



Nevada Zinc Corporation

Radiometric Map

Goodman Creek Survey Block

Thorium over Potassium Ratio

October 7, 2016

Precision GeoSurveys

Plate16
GC_eTh/%K

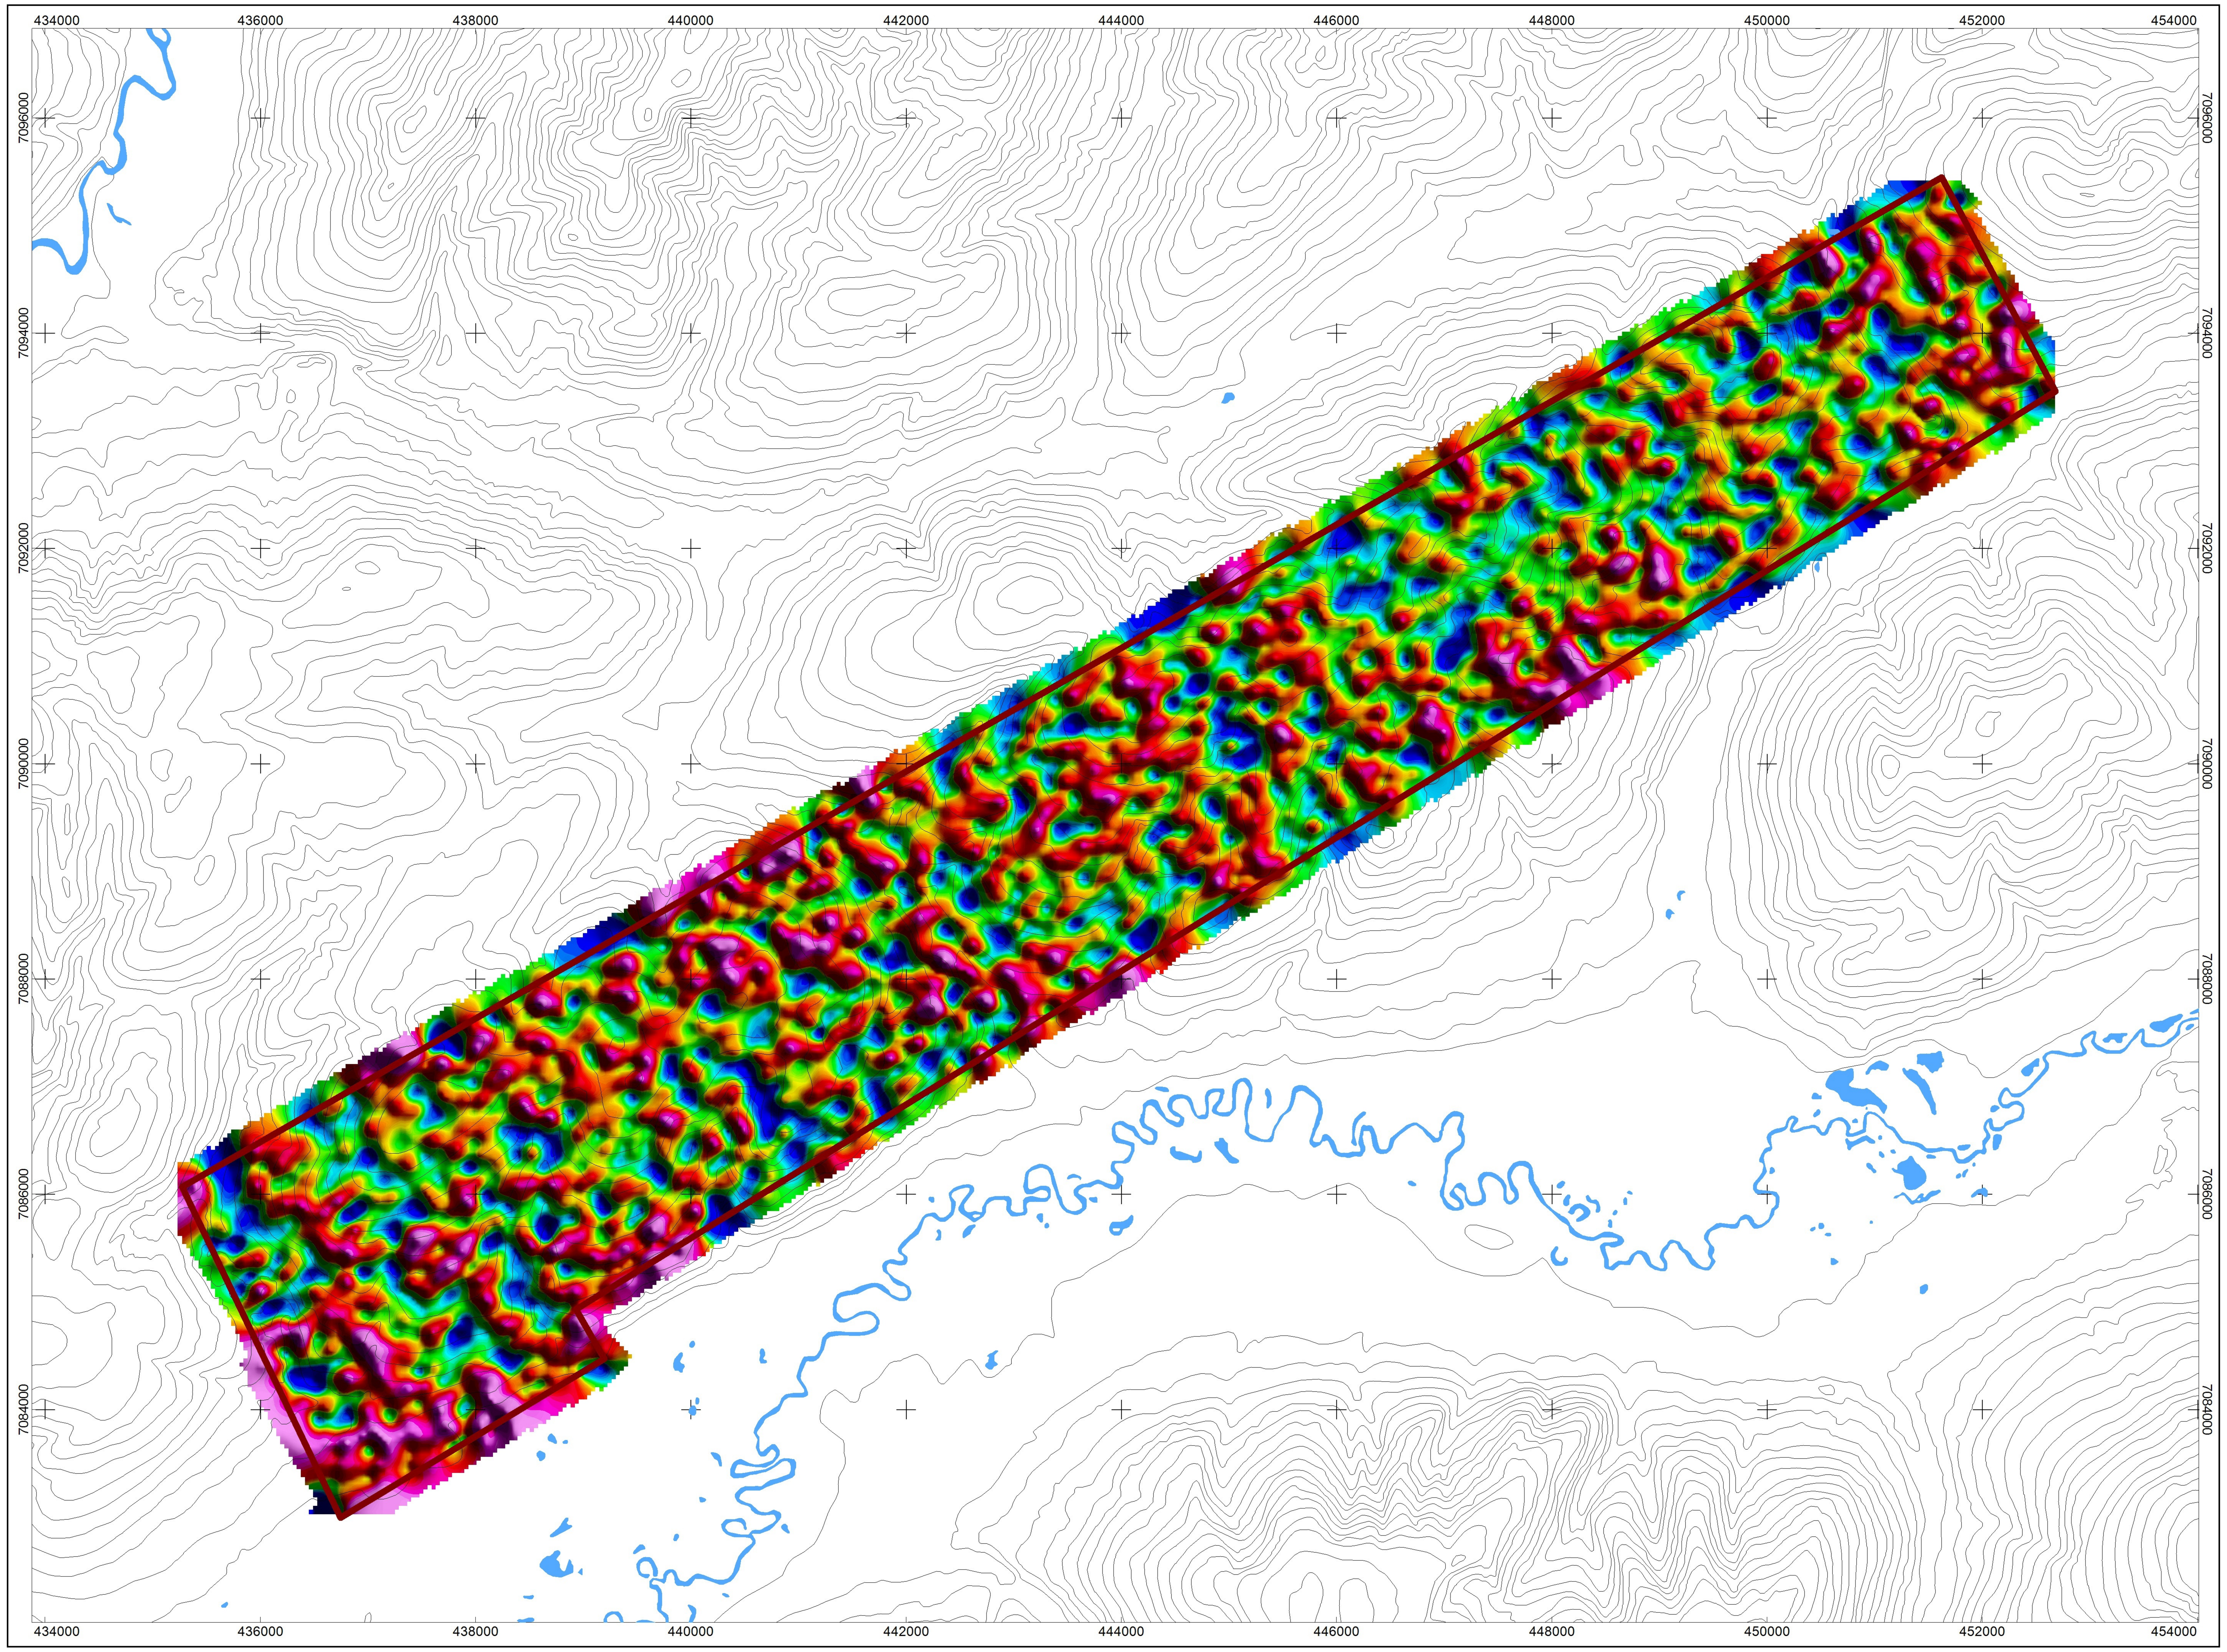

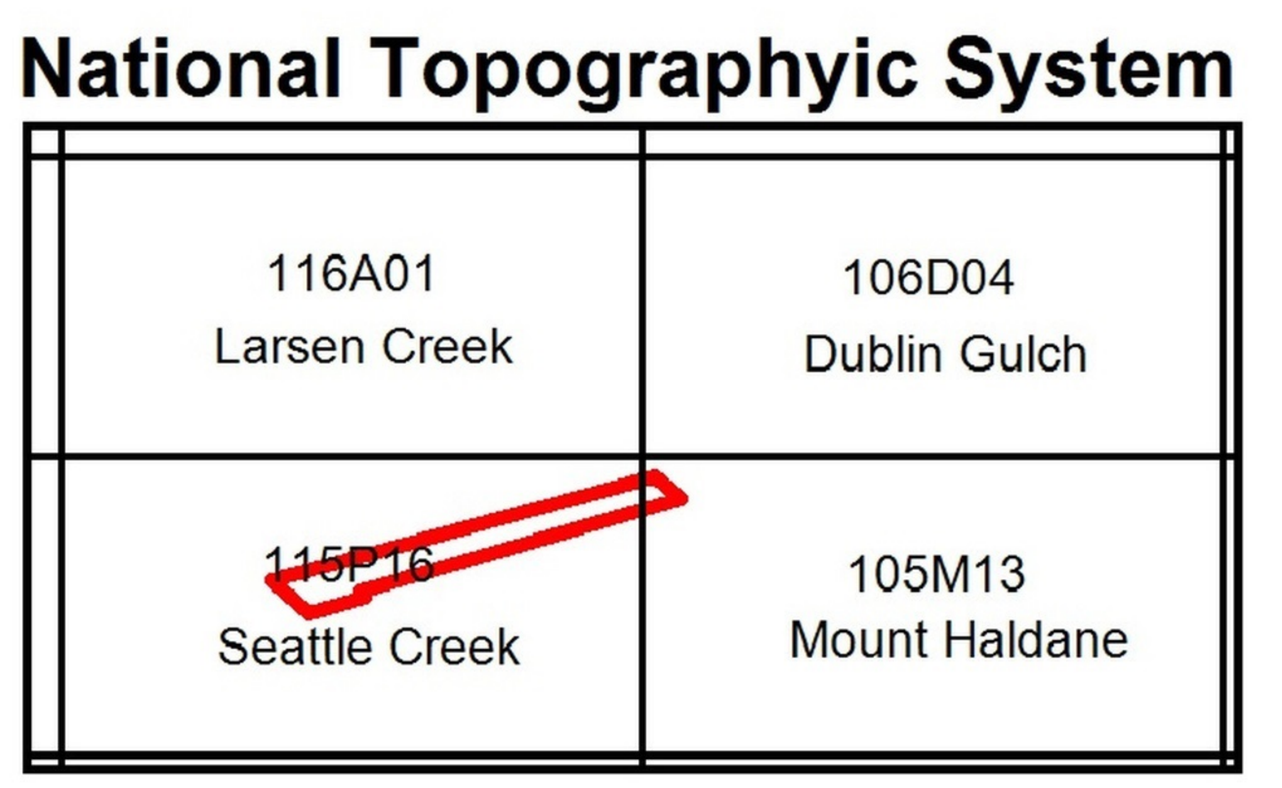

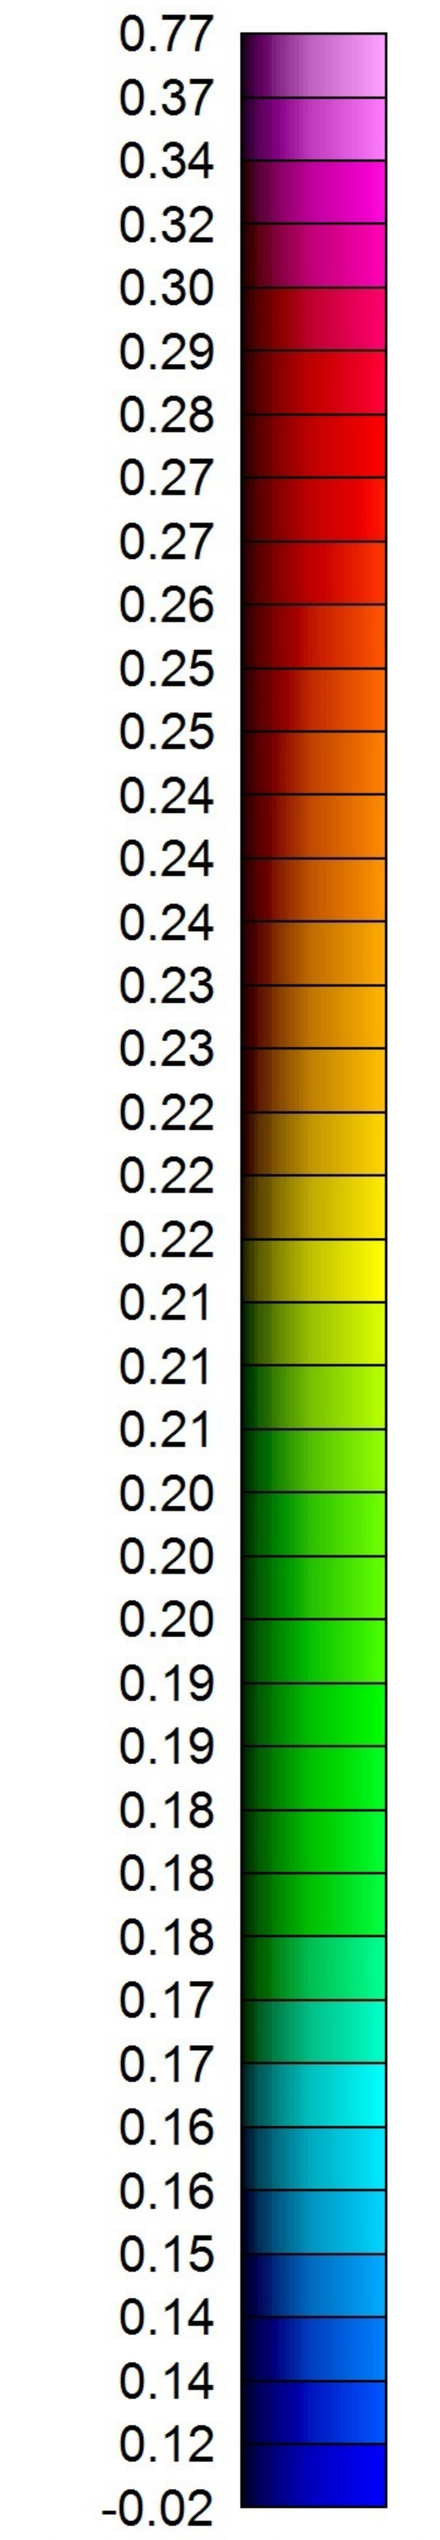

eU/eTh Ratio

MAP PROJECTION:

Projection: Universal Transverse Mercator Zone 8N

Datum: WGS 84

Local Datum Transform: World

GOODMAN CREEK BLOCK SURVEY SPECIFICATIONS:

Survey Date:	September 19, 2016
Survey Base:	Mayo, Yukon
Aircraft Type:	Eurocopter AS350
Registration:	C-GSVY
Survey Technology:	Magnetic and Radiometric Survey
Mean Flight Height:	35.6 meters
Survey Line Spacing:	150 meters
Survey Line Direction:	150°/330°
Tie Line Spacing:	1500 meters
Tie Line Direction:	060°/240°

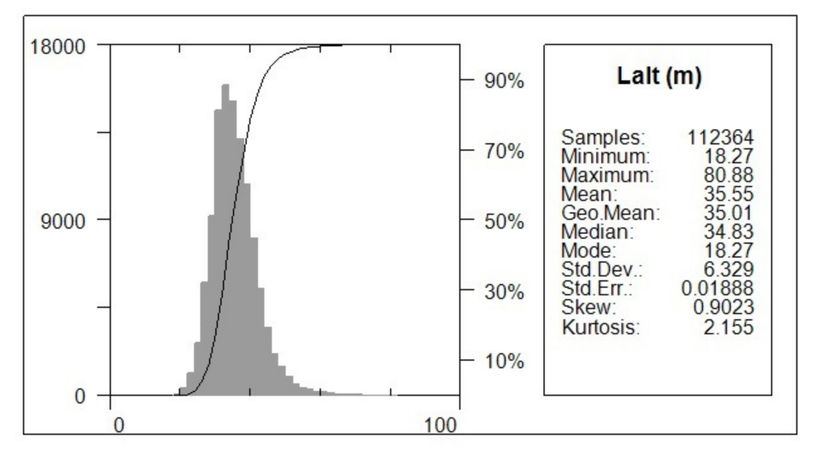

AIRBORNE SURVEY SYSTEM:

Magnetometer Sensor:	Scintrex CS-3 Cesium
Configuration:	Stinger with 3 axis compensation
Sample Rate:	10 Hz
Sensitivity:	0.0006 nT √Hz rms
Gamma Ray Spectrometer:	Pico Envirotec GRS-10 Gamma Spectrometer
Downward-Looking Crystals:	16.8 litres of NaI(Tl) crystals
Upward-Looking Crystals:	4.2 litres of NaI(Tl) crystals
Sample Rate:	1 Hz

Legend

Water Bodies (unclassified)..................................

Goodman Creek Survey Block Outline...................

DATA REFERENCE:

Radiometric data have been corrected for effective height, aircraft, cosmic, radon, stripping ratios, and attenuations, and then converted to apparent radioelement concentrations.

TOPOGRAPHIC REFERENCE:

National Topographic Data Base (NTDB), Canada. Ottawa, ON: Government of Canada, Natural Resources Canada, Center for Topographic Information. Contour interval at 100 ft.
URL <http://ftp.geogratis.gc.ca/pub/nrcan_rncan/vector/ntdb_bndt/>[2007]



Nevada Zinc Corporation

Radiometric Map

Goodman Creek Survey Block

Uranium over Thorium Ratio

October 7, 2016

Precision GeoSurveys

Plate14
GC_eU/eTh

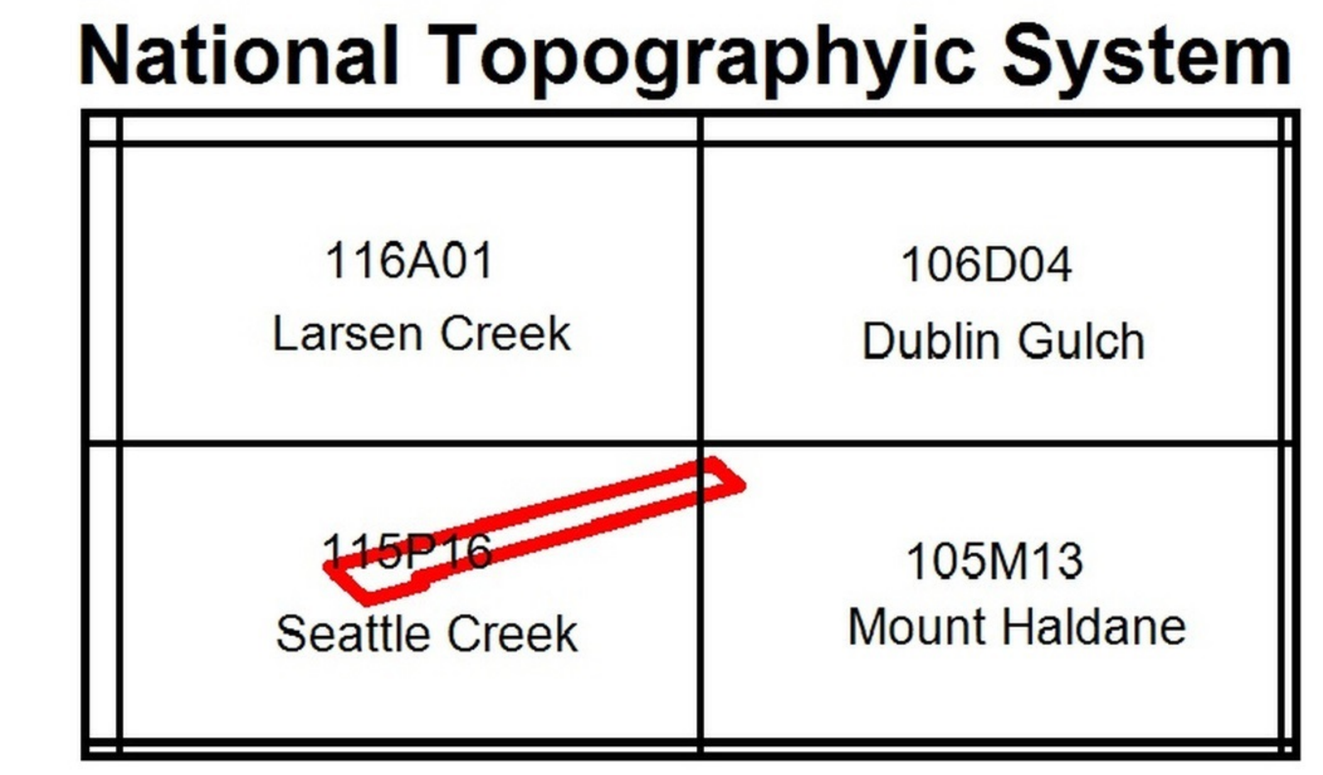

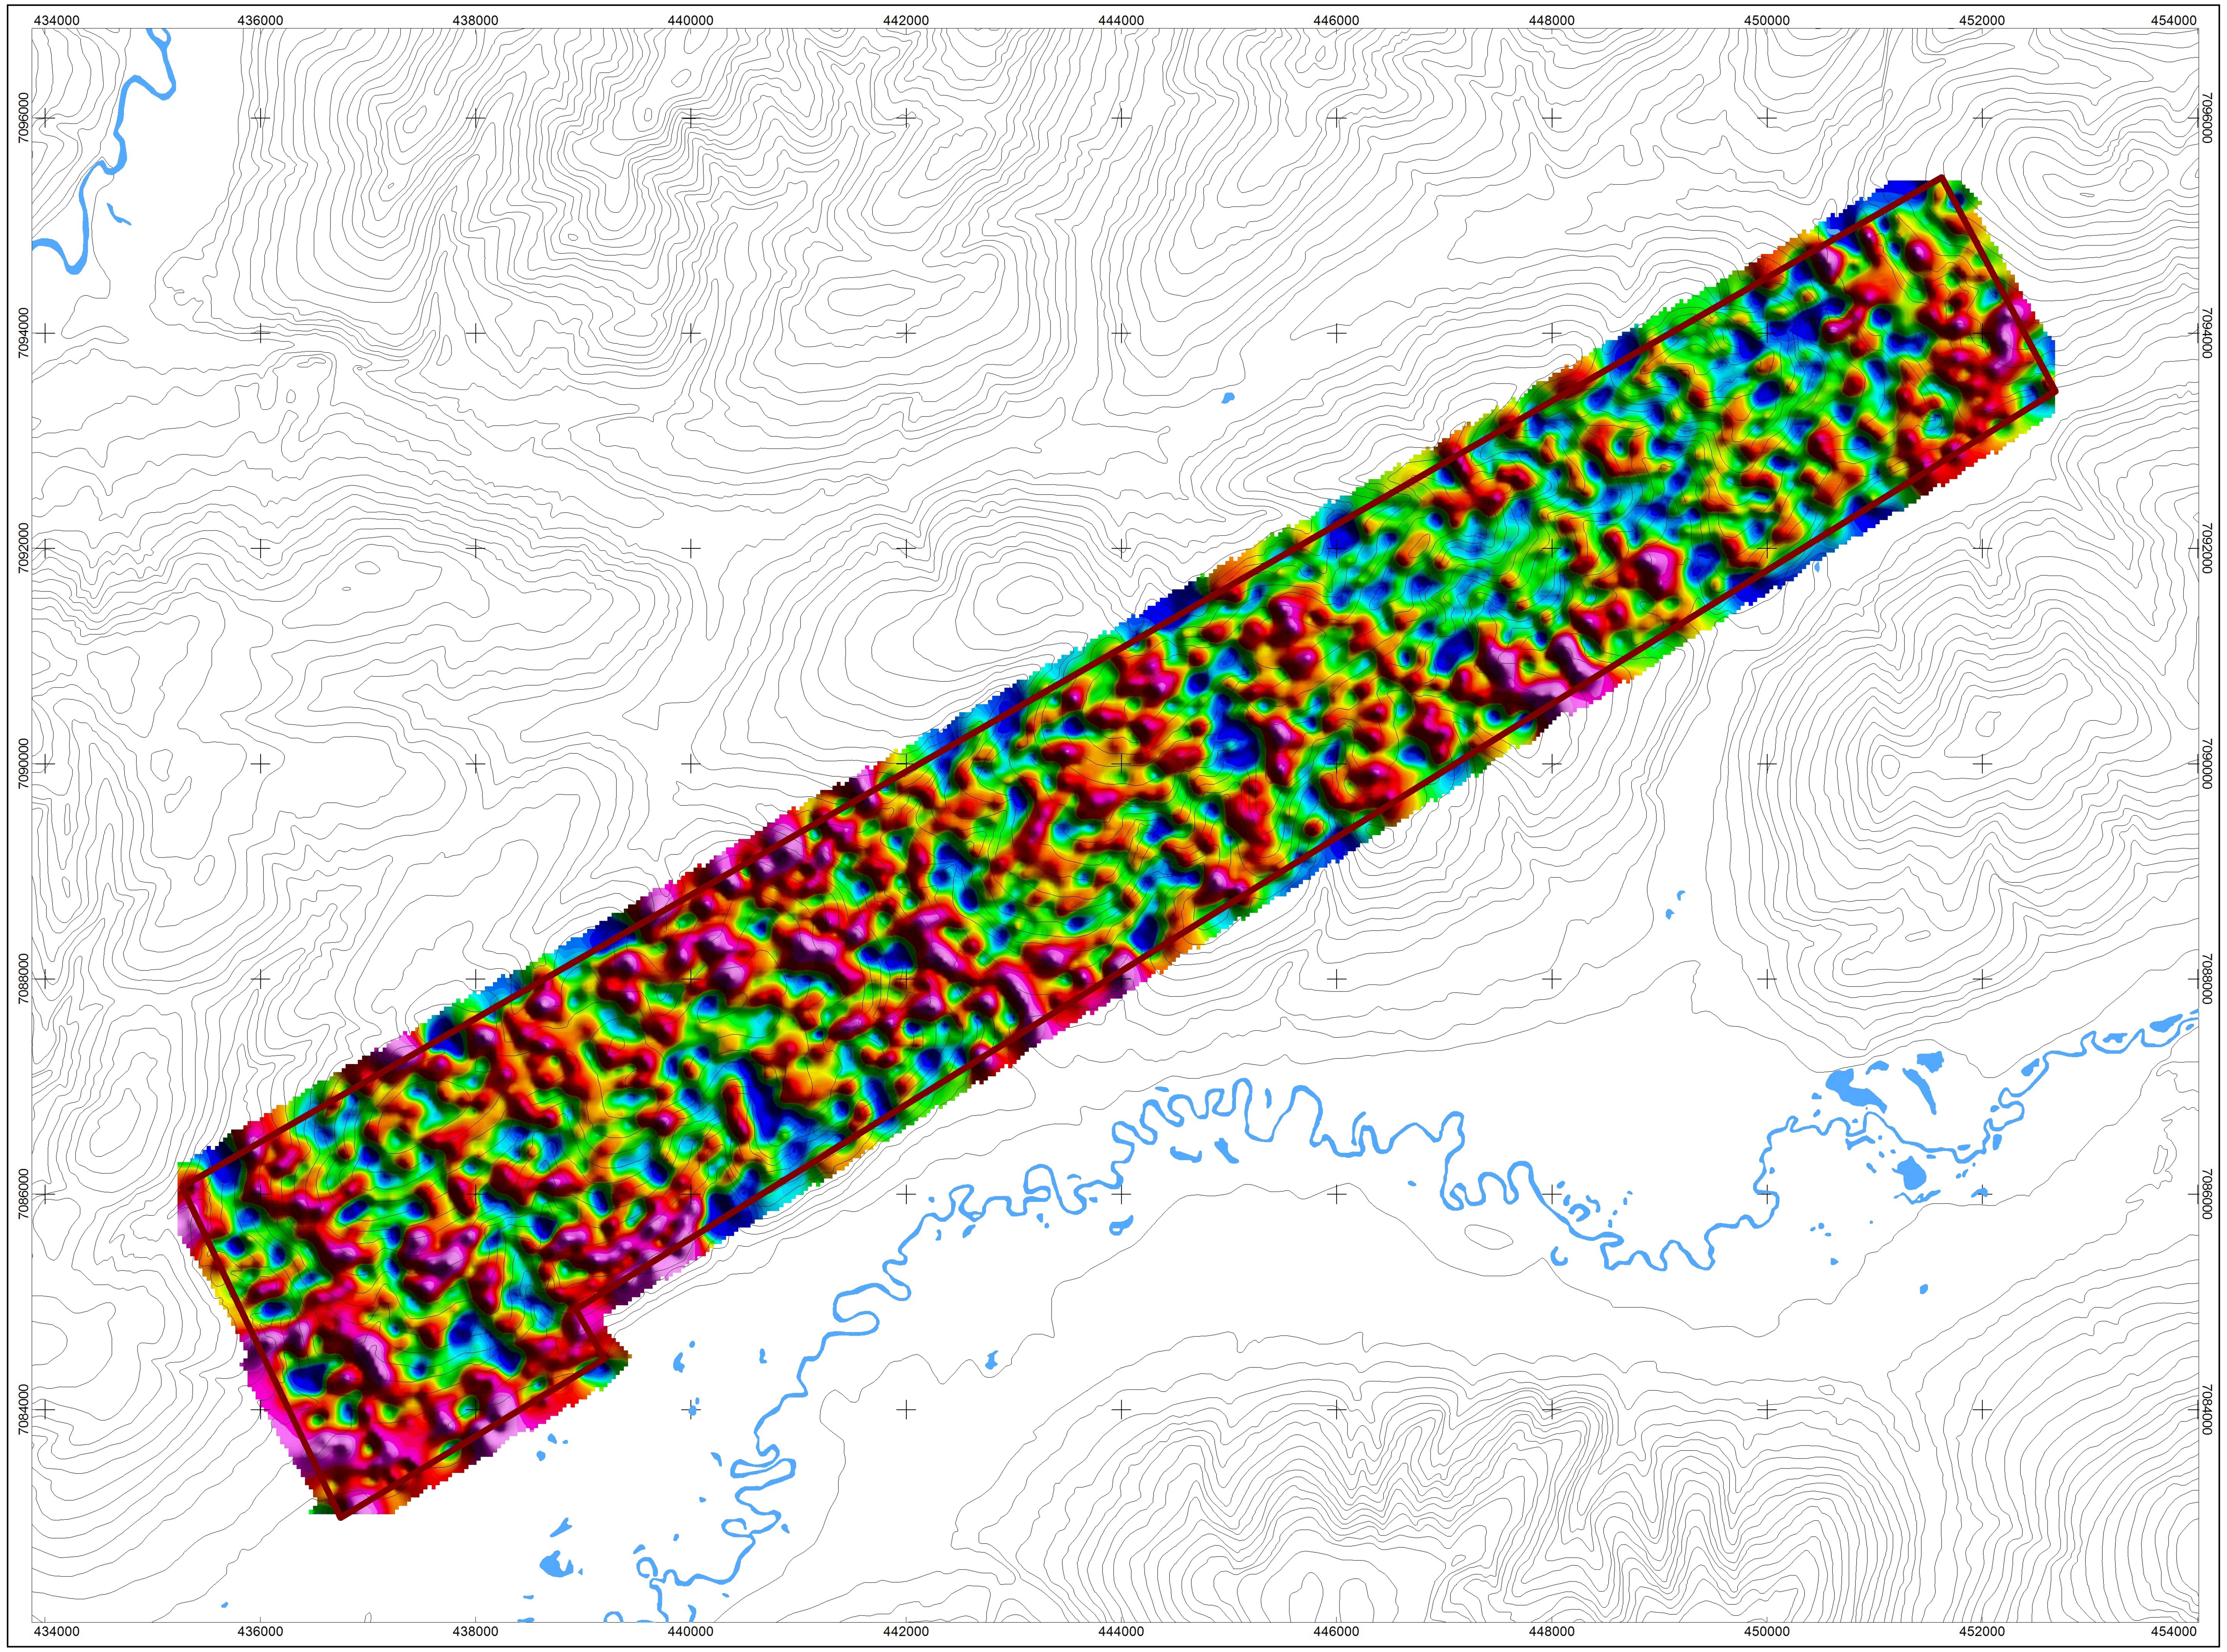

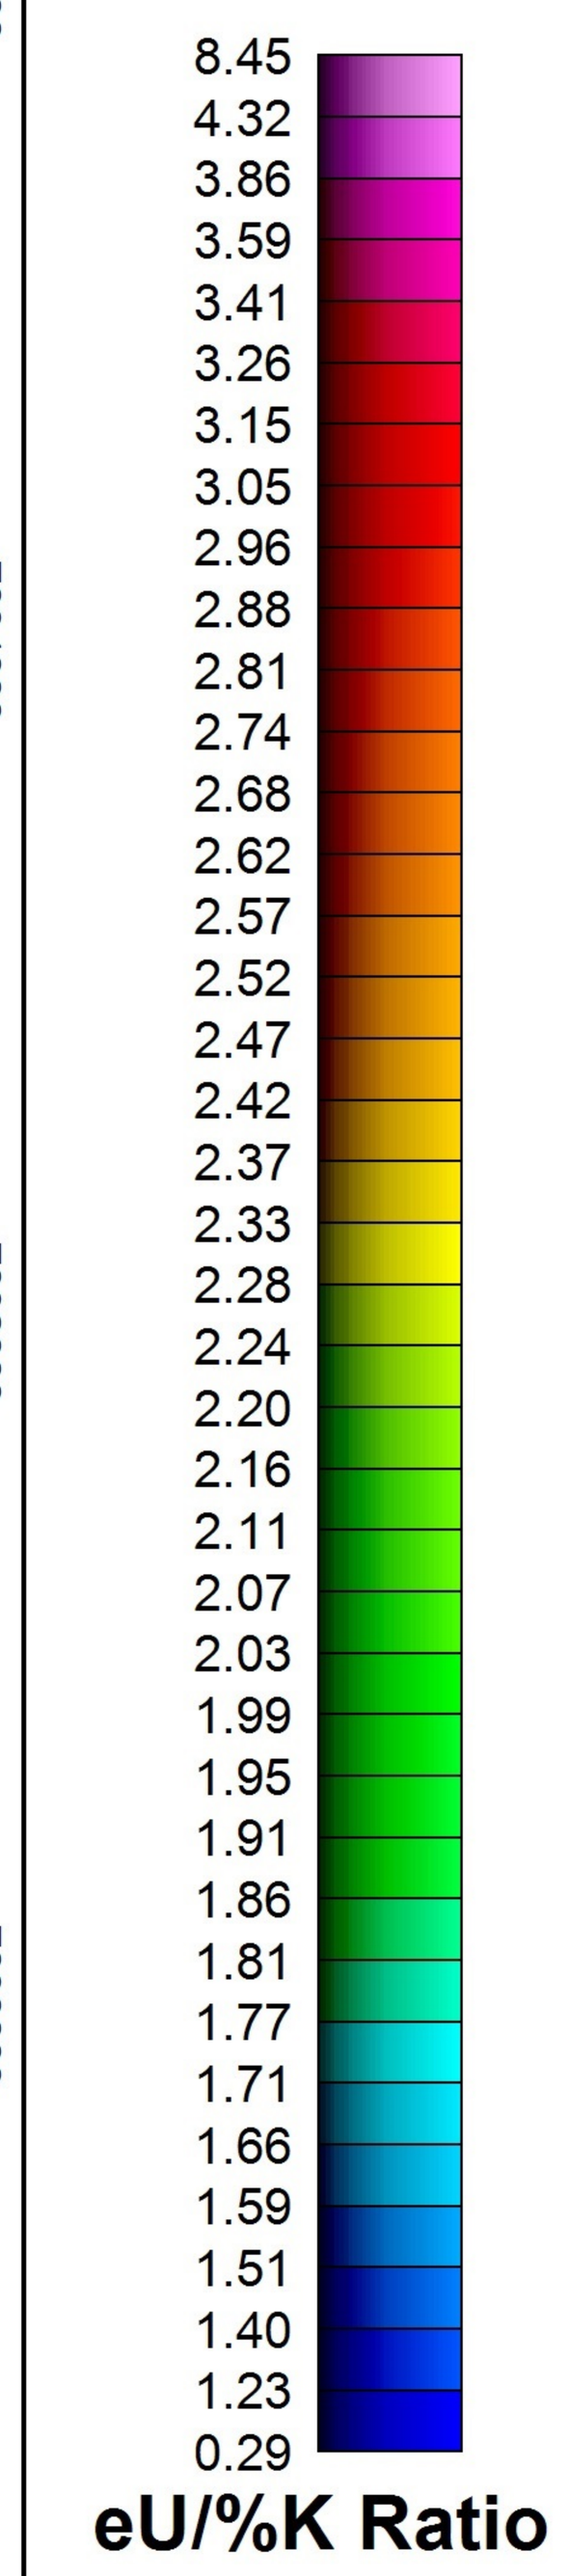

MAP PROJECTION:

Projection: Universal Transverse Mercator Zone 8N

Datum: WGS 84

Local Datum Transform: World

GOODMAN CREEK BLOCK SURVEY SPECIFICATIONS:

Survey Date:	September 19, 2016
Survey Base:	Mayo, Yukon
Aircraft Type:	Eurocopter AS350
Registration:	C-GSVY
Survey Technology:	Magnetic and Radiometric Survey
Mean Flight Height:	35.6 meters
Survey Line Spacing:	150 meters
Survey Line Direction:	150°/330°
Tie Line Spacing:	1500 meters
Tie Line Direction:	060°/240°

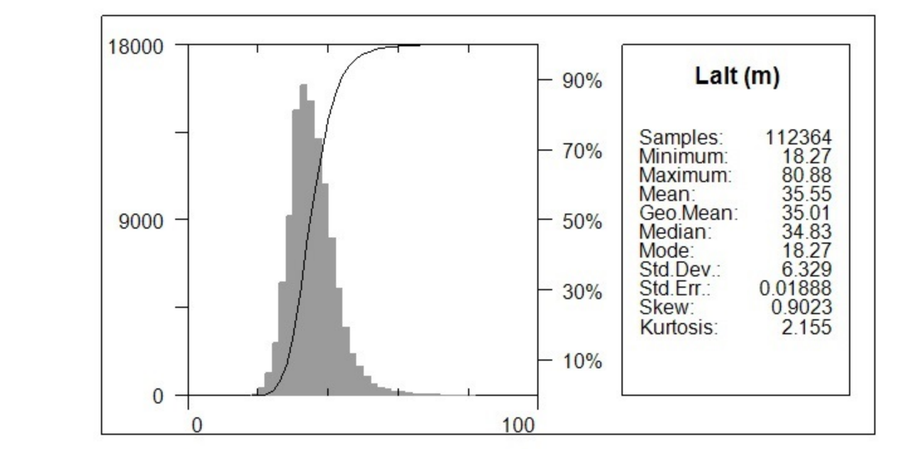

AIRBORNE SURVEY SYSTEM:

Magnetometer Sensor:	Scintrex CS-3 Cesium
Configuration:	Stinger with 3 axis compensation
Sample Rate:	10 Hz
Sensitivity:	0.0006 nT √Hz rms
Gamma Ray Spectrometer:	Pico Envirotec GRS-10 Gamma Spectrometer
Downward-Looking Crystals:	16.8 litres of NaI(Tl) crystals
Upward-Looking Crystals:	4.2 litres of NaI(Tl) crystals
Sample Rate:	1 Hz

Legend

Water Bodies (unclassified)..................................

Goodman Creek Survey Block Outline...................

DATA REFERENCE:

Radiometric data have been corrected for effective height, aircraft, cosmic, radon, stripping ratios, and attenuations, and then converted to apparent radioelement concentrations.

TOPOGRAPHIC REFERENCE:

National Topographic Data Base (NTDB), Canada. Ottawa, ON: Government of Canada, Natural Resources Canada, Center for Topographic Information. Contour interval at 100 ft.
URL <http://ftp.geogratis.gc.ca/pub/nrcan_rncan/vector/ntdb_bndt/>[2007]

Scale 1:35000

500 0 500 1000 1500 2000 2500

(meters)

WGS 84 / UTM zone 8N
NTS SHEETS 105M13, 115P16

Nevada Zinc Corporation

Radiometric Map

Goodman Creek Survey Block

Uranium over Potassium Ratio

October 7, 2016

Precision GeoSurveys

Plate15
GC_eU/%K

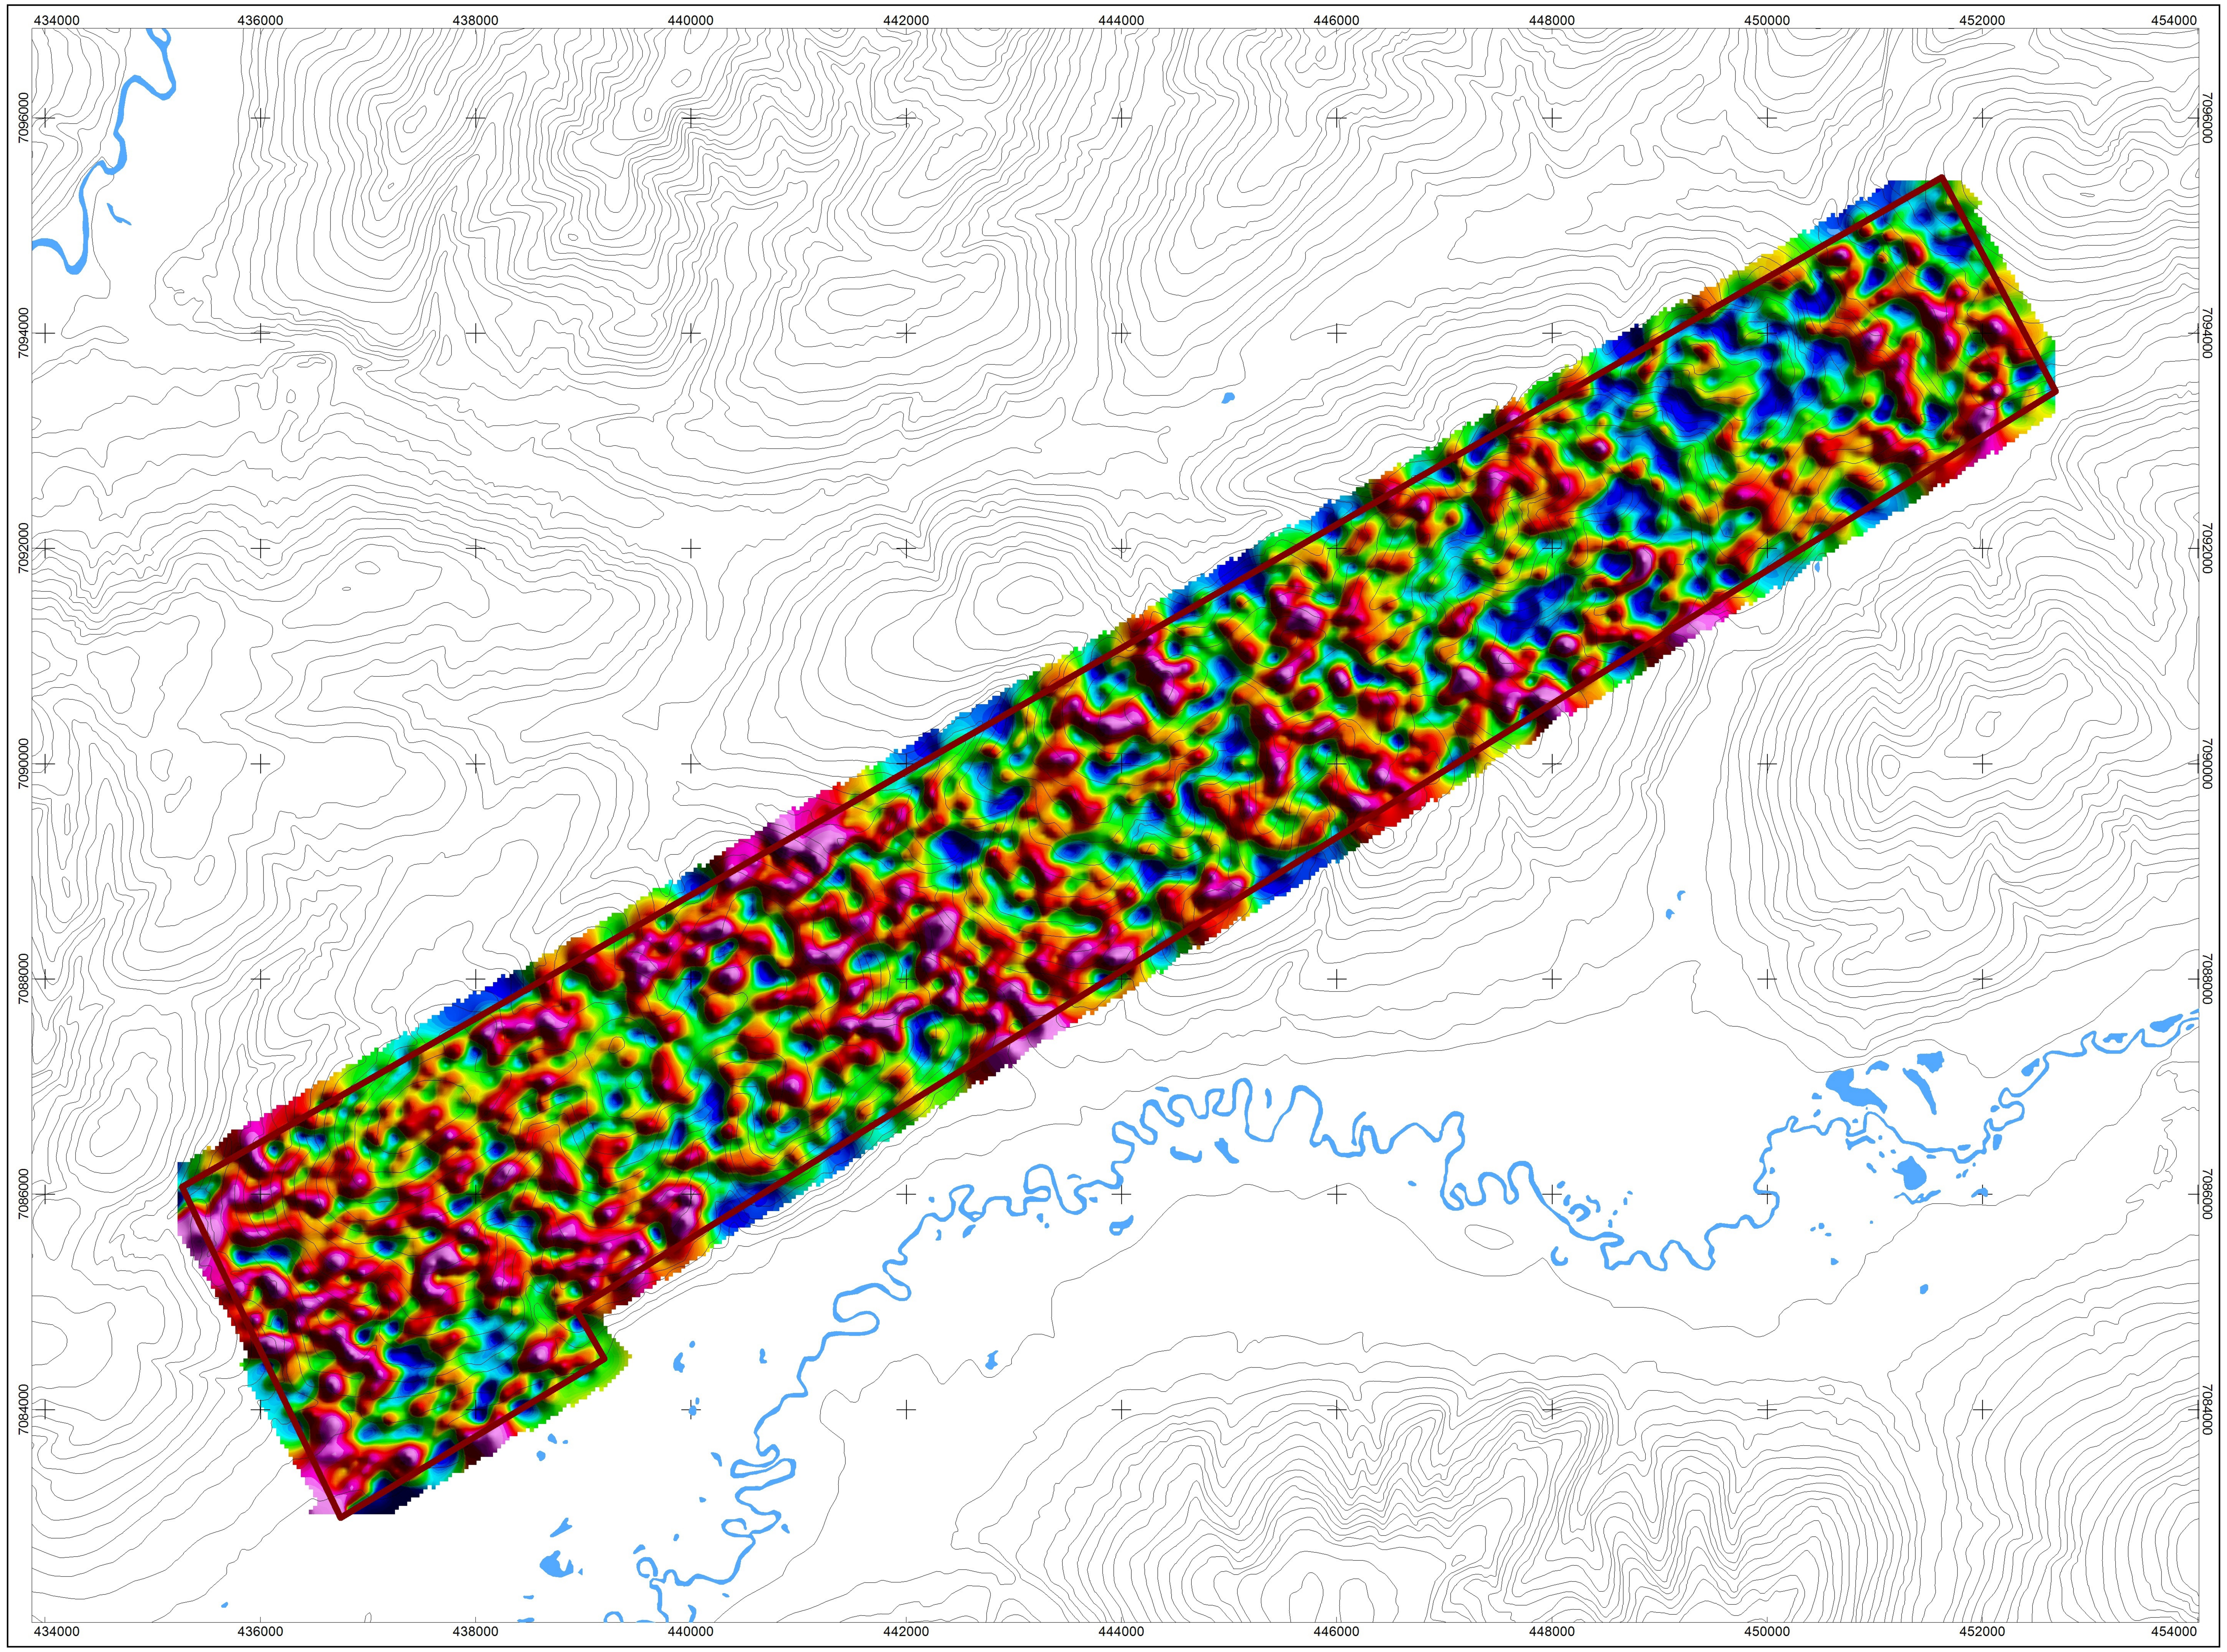

National Topographyic System

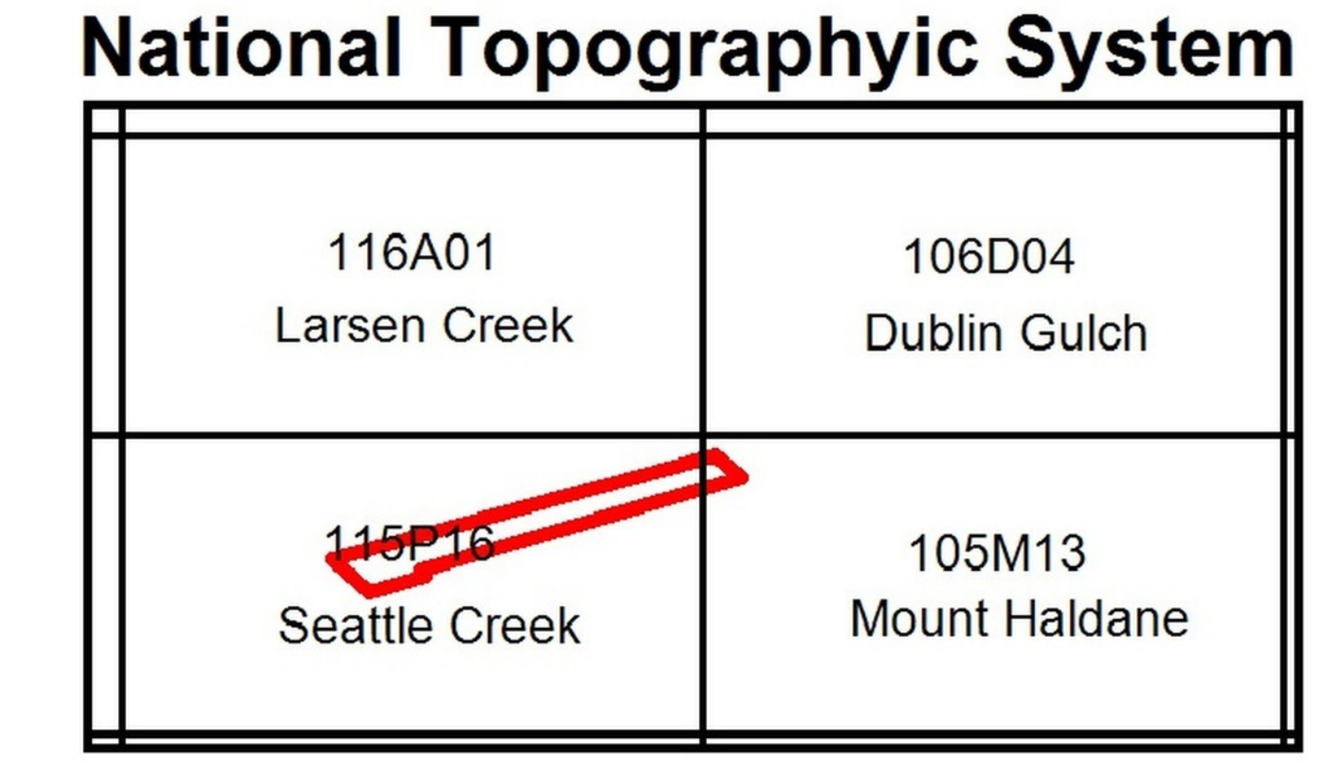

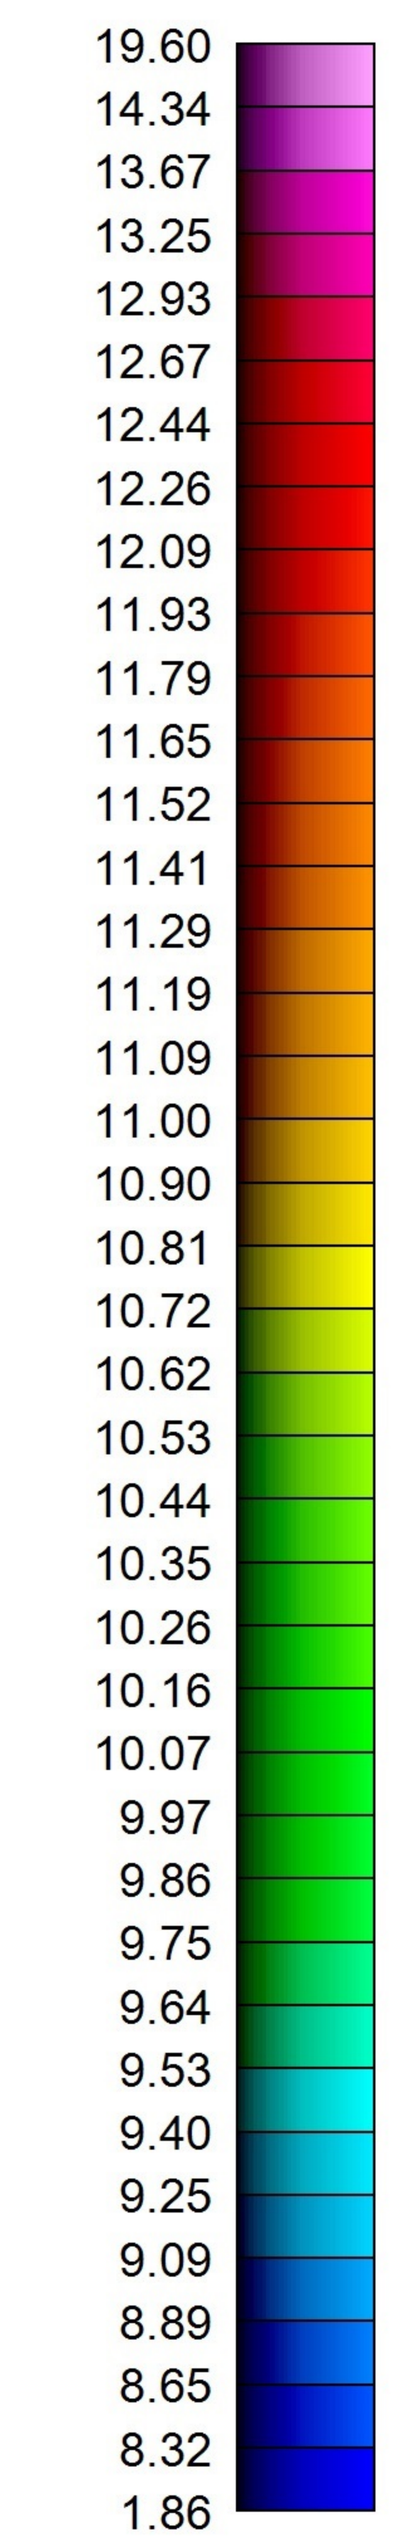

eTh/%K Ratio

MAP PROJECTION:

Projection: Universal Transverse Mercator Zone 8N
Datum: WGS 84
Local Datum Transform: World

GOODMAN CREEK BLOCK SURVEY SPECIFICATIONS:

Survey Date:	September 19, 2016
Survey Base:	Mayo, Yukon
Aircraft Type:	Eurocopter AS350
Registration:	C-GSVY
Survey Technology:	Magnetic and Radiometric Survey
Mean Flight Height:	35.6 meters
Survey Line Spacing:	150 meters
Survey Line Direction:	150°/330°
Tie Line Spacing:	1500 meters
Tie Line Direction:	060°/240°

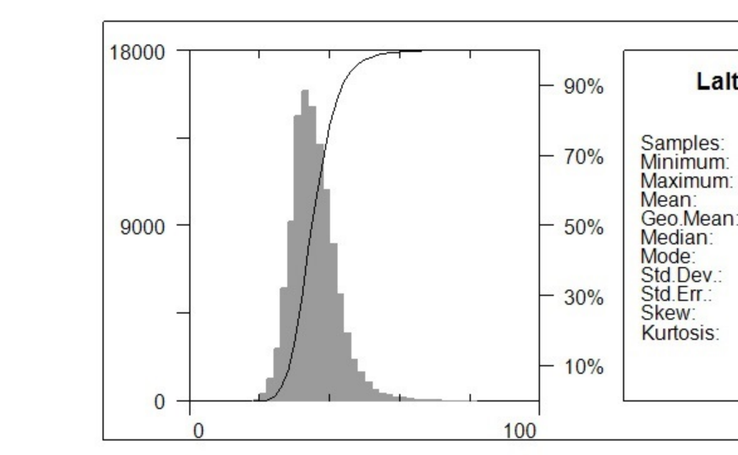

AIRBORNE SURVEY SYSTEM:

Magnetometer Sensor:	Scintrex CS-3 Cesium
Configuration:	Stinger with 3 axis compensation
Sample Rate:	10 Hz
Sensitivity:	0.0006 nT √Hz rms
Gamma Ray Spectrometer:	Pico Envirotec GRS-10 Gamma Spectrometer
Downward-Looking Crystals:	16.8 litres of NaI(Tl) crystals
Upward-Looking Crystals:	4.2 litres of NaI(Tl) crystals
Sample Rate:	1 Hz

Legend

Water Bodies (unclassified)..................................

Goodman Creek Survey Block Outline....................

DATA REFERENCE:

Radiometric data have been corrected for effective height, aircraft, cosmic, radon, stripping ratios, and attenuations, and then converted to apparent radioelement concentrations.

TOPOGRAPHIC REFERENCE:

National Topographic Data Base (NTDB), Canada. Ottawa, ON: Government of Canada, Natural Resources Canada, Center for Topographic Information. Contour interval at 100 ft.
URL <http://ftp.geogratis.gc.ca/pub/nrcan_rncan/vector/ntdb_bndt/>[2007]

Scale 1:35000



Nevada Zinc Corporation

Radiometric Map

Goodman Creek Survey Block

Thorium over Potassium Ratio

October 7, 2016

Precision GeoSurveys

Plate16
GC_eTh/%K

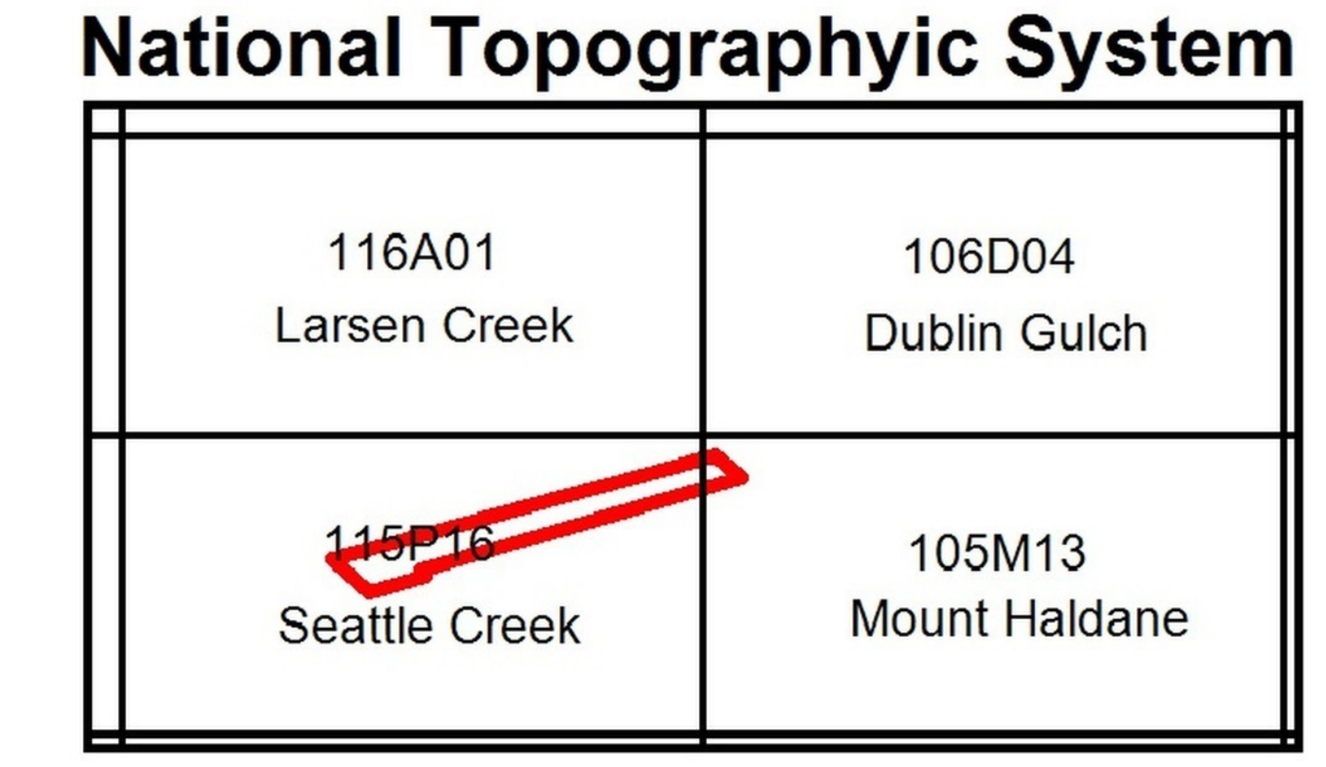

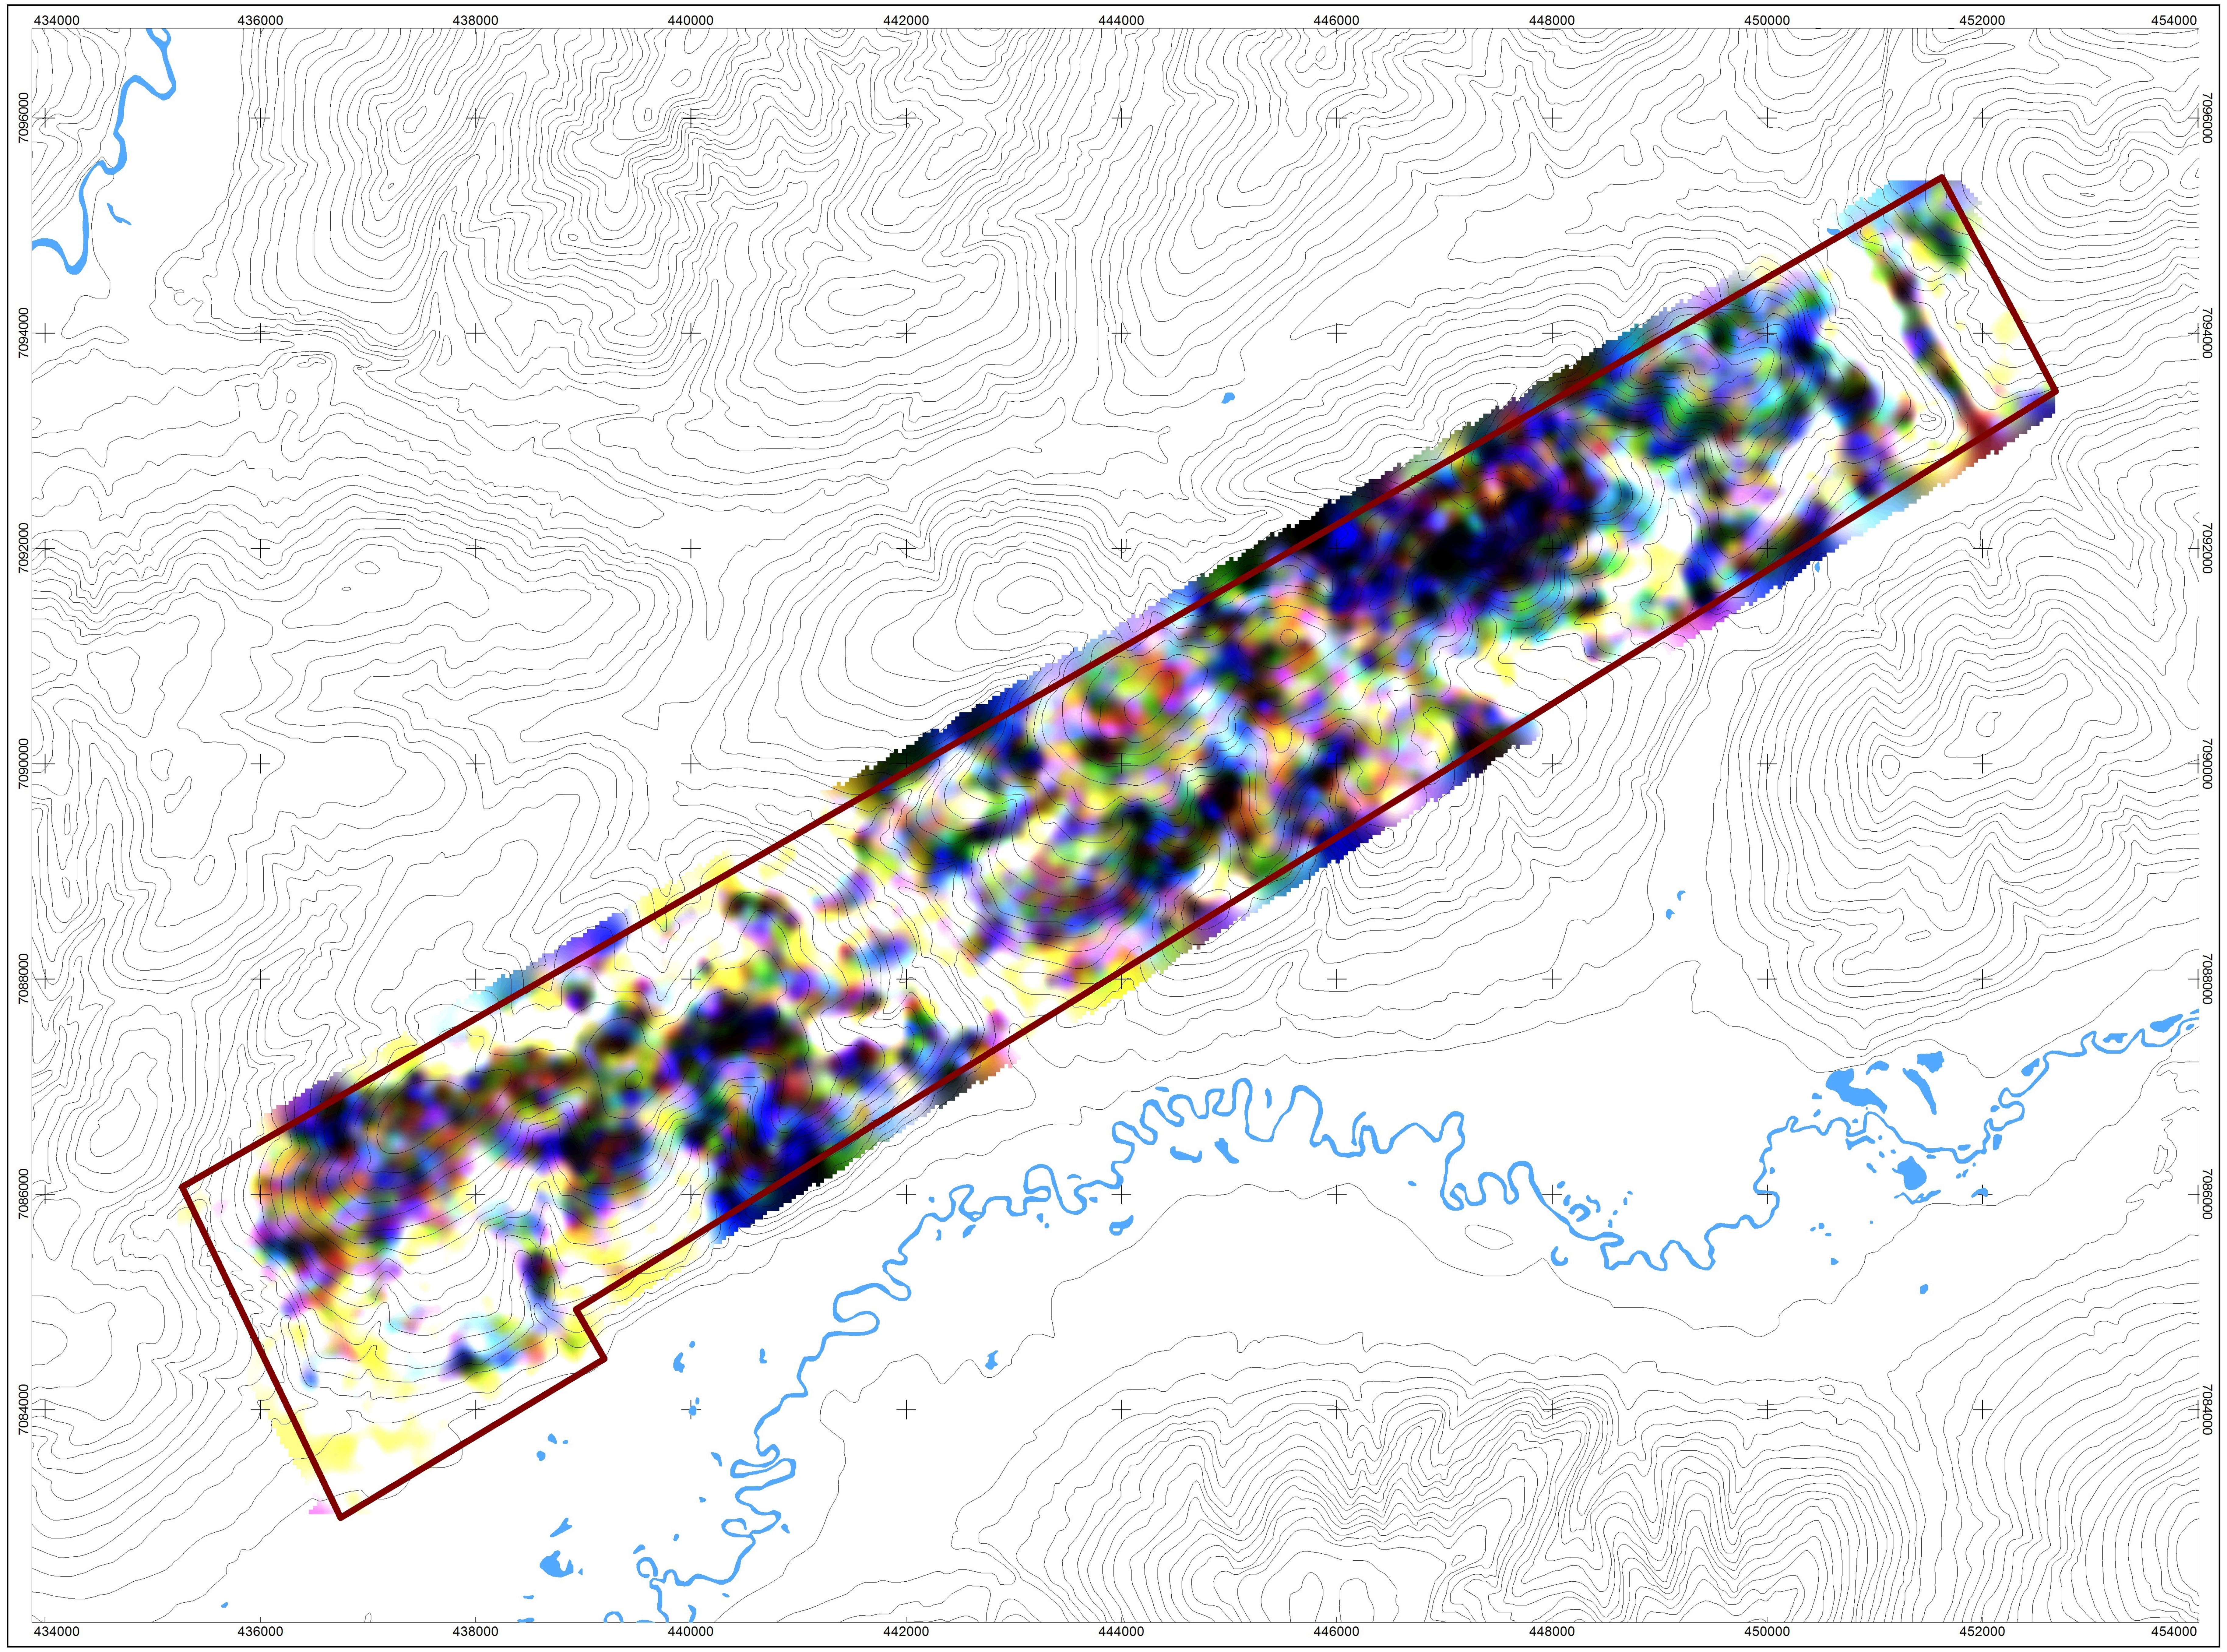

MAP PROJECTION:

Projection: Universal Transverse Mercator Zone 8N
Datum: WGS 84
Local Datum Transform: World

GOODMAN CREEK BLOCK SURVEY SPECIFICATIONS:

Survey Date:	September 19, 2016
Survey Base:	Mayo, Yukon
Aircraft Type:	Eurocopter AS350
Registration:	C-GSVY
Survey Technology:	Magnetic and Radiometric Survey
Mean Flight Height:	35.6 meters
Survey Line Spacing:	150 meters
Survey Line Direction:	150°/330°
Tie Line Spacing:	1500 meters
Tie Line Direction:	060°/240°

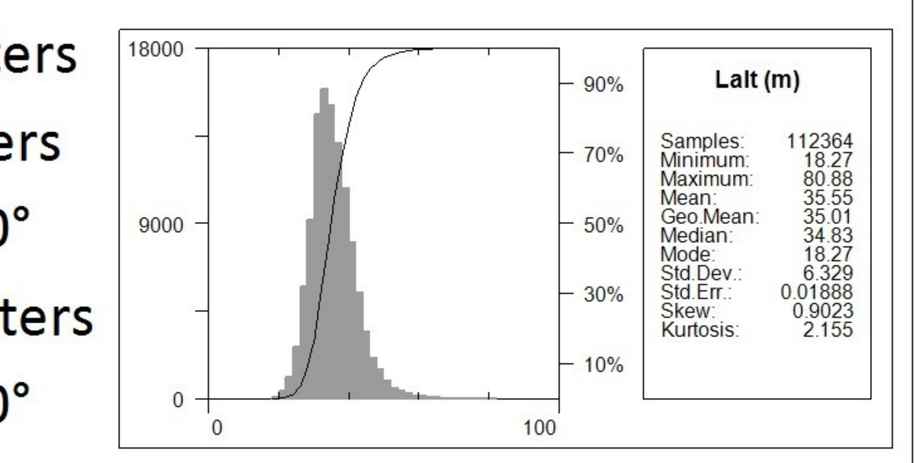

AIRBORNE SURVEY SYSTEM:

Magnetometer Sensor:	Scintrex CS-3 Cesium
Configuration:	Stinger with 3 axis compensation
Sample Rate:	10 Hz
Sensitivity:	0.0006 nT √Hz rms
Gamma Ray Spectrometer:	Pico Envirotec GRS-10 Gamma Spectrometer
Downward-Looking Crystals:	16.8 litres of NaI(Tl) crystals
Upward-Looking Crystals:	4.2 litres of NaI(Tl) crystals
Sample Rate:	1 Hz

Legend

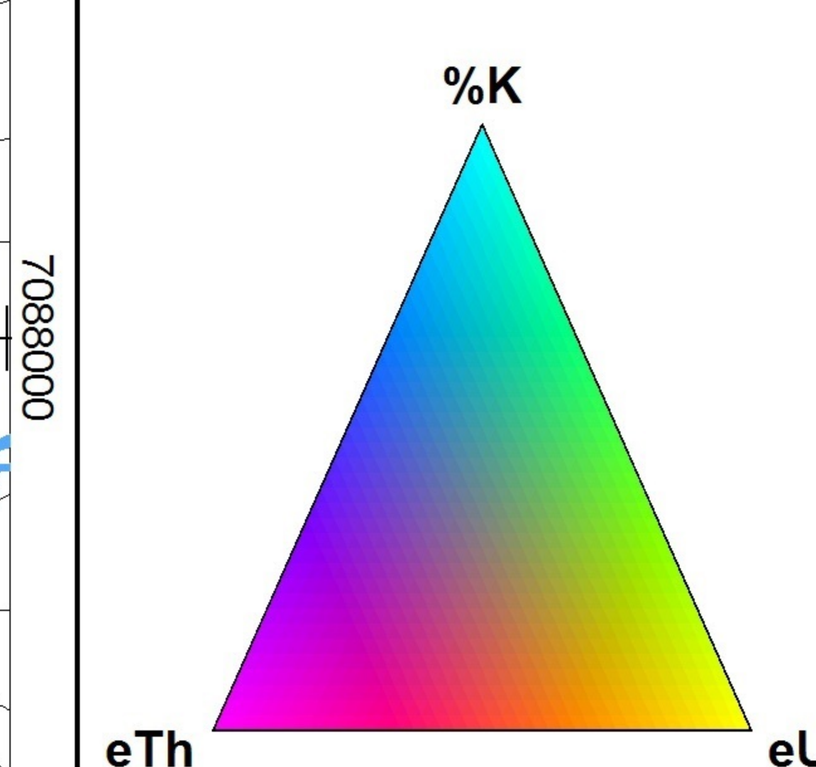

Water Bodies (unclassified)..................................

Goodman Creek Survey Block Outline...................

DATA REFERENCE:

Radiometric data have been corrected for effective height, aircraft, cosmic, radon, stripping ratios, and attenuations, and then converted to apparent radioelement concentrations.

TOPOGRAPHIC REFERENCE:

National Topographic Data Base (NTDB), Canada. Ottawa, ON: Government of Canada, Natural Resources Canada, Center for Topographic Information. Contour interval at 100 ft.
URL <http://ftp.geogratis.gc.ca/pub/nrcan_rncan/vector/ntdb_bndt/>[2007]

Scale 1:35000

500 0 500 1000 1500 2000 2500

(meters)

WGS 84 / UTM zone 8N
NTS SHEETS 105M13; 115P16

Nevada Zinc Corporation

Radiometric Map

Goodman Creek Survey Block

Ternary Map

October 7, 2016

Precision GeoSurveys

Plate17
GC_TM