
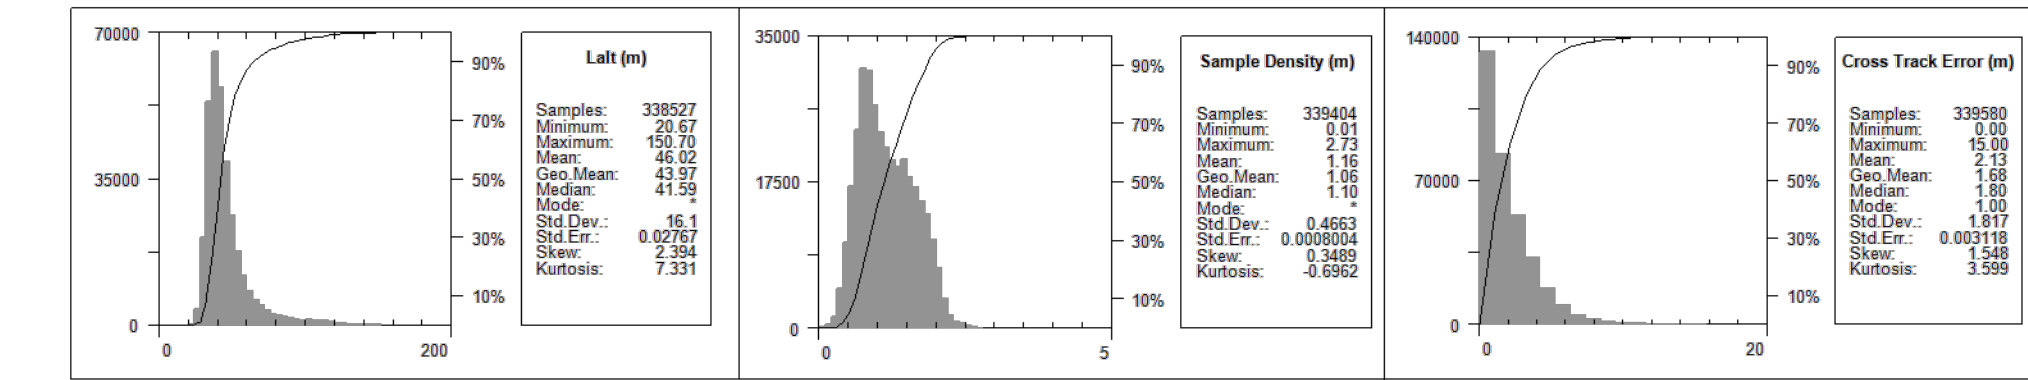



National Topographic System

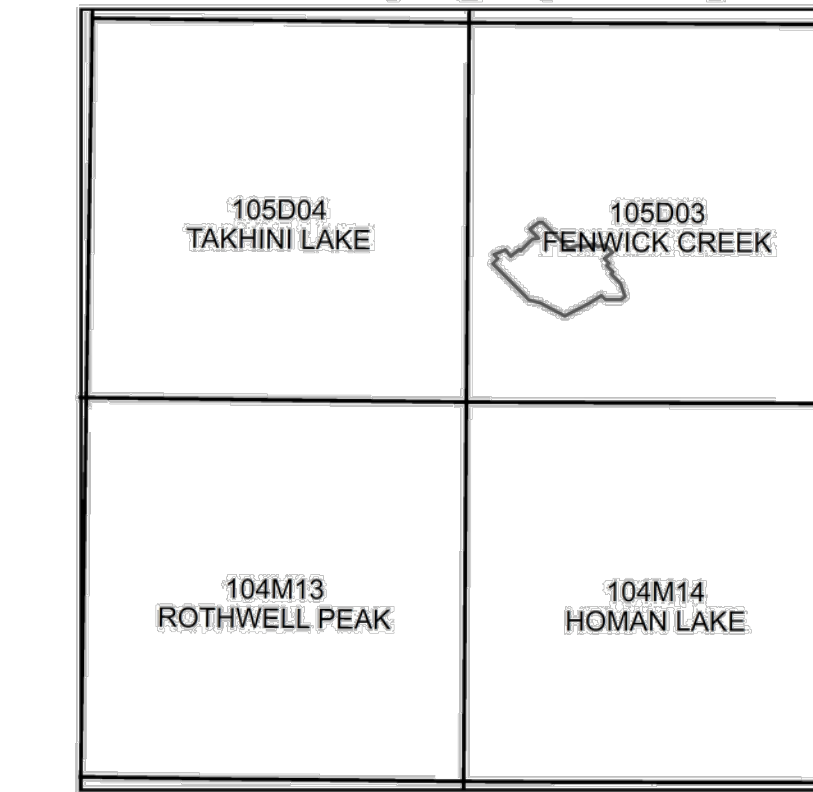

**MAP PROJECTION**  
 Projection: Universal Transverse Mercator Zone 8N  
 Datum: WGS 84  
 Local Datum Transform: World


**PIKE-WARDEN SURVEY SPECIFICATIONS**  
 Survey Dates: July 8 and July 9, 2021  
 Survey Base: Mt. Skukum camp, BC  
 Aircraft Type: Airbus AS350 helicopter  
 Registration: C-GSVV  
 Survey Technology: Gradient magnetic, VLF-EM, and radiometric survey  
 Total Line km: 395 km  
 Mean Survey Height: 46.0 meters  
 Survey Line Spacing: 100 meters  
 Survey Line Direction: 135°/315°  
 Tie Line Spacing: 1000 meters  
 Tie Line Direction: 045°/225°

**AIRBORNE SURVEY SYSTEM**  
 Magnetometer Sensors: 2 x Scintrex CS-3 Cesium  
 1 x Geometrics G-822A Cesium  
 Configuration: Triple gradient boom with 3 axis compensation  
 Sample Rate: 20 Hz  
 Sensitivity: 0.0006 nT /Hz rms  
 VLF-EM Receiver: Herz Totem-2A  
 Sample Rate: 20 Hz  
 Transmitter Stations: NML – LaMoire, ND 25.2 kHz  
 NLK – Seattle, WA 24.8 kHz  
 Gamma Ray Spectrometer: Pico Envirotec AGRS-5  
 Downward-Looking Crystals: 16.8 litres of NaI(Tl)  
 Upward-Looking Crystal: 4.2 litres of NaI(Tl)  
 Sample Rate: 1 Hz (Resampled to 20 Hz)


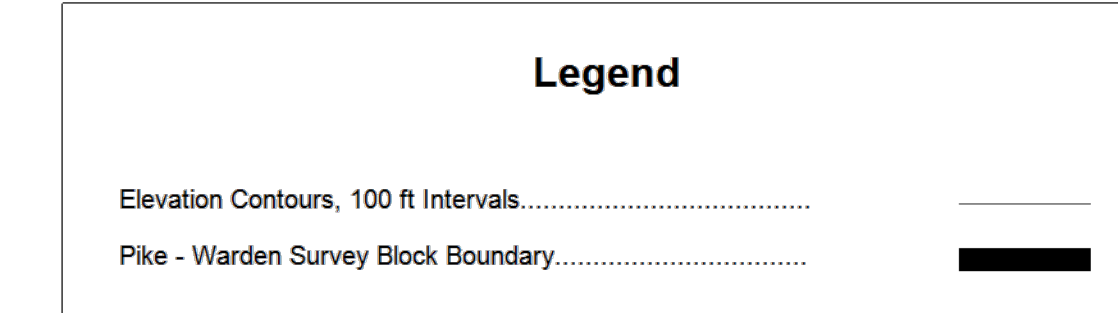


**DATA REFERENCE**  
 Calculated Vertical Gradient (CVG) is the first order vertical component of Residual Magnetic Intensity (RMI). Refer to report for details. CVG is represented as a grid and drawn with a histogram-equalized colour shade; sun illumination inclination at 0° and declination at 000°.

**TOPOGRAPHIC REFERENCE**  
 National Topographic Data Base (NTDB), Canada, Ottawa, ON: Government of Canada, Natural Resources Canada, Center for Topographic Information.  
 URL <[http://tp.geogratis.gc.ca/pub/nrcan\\_mcan/vector/ntdb\\_bnd/v/2007](http://tp.geogratis.gc.ca/pub/nrcan_mcan/vector/ntdb_bnd/v/2007)>

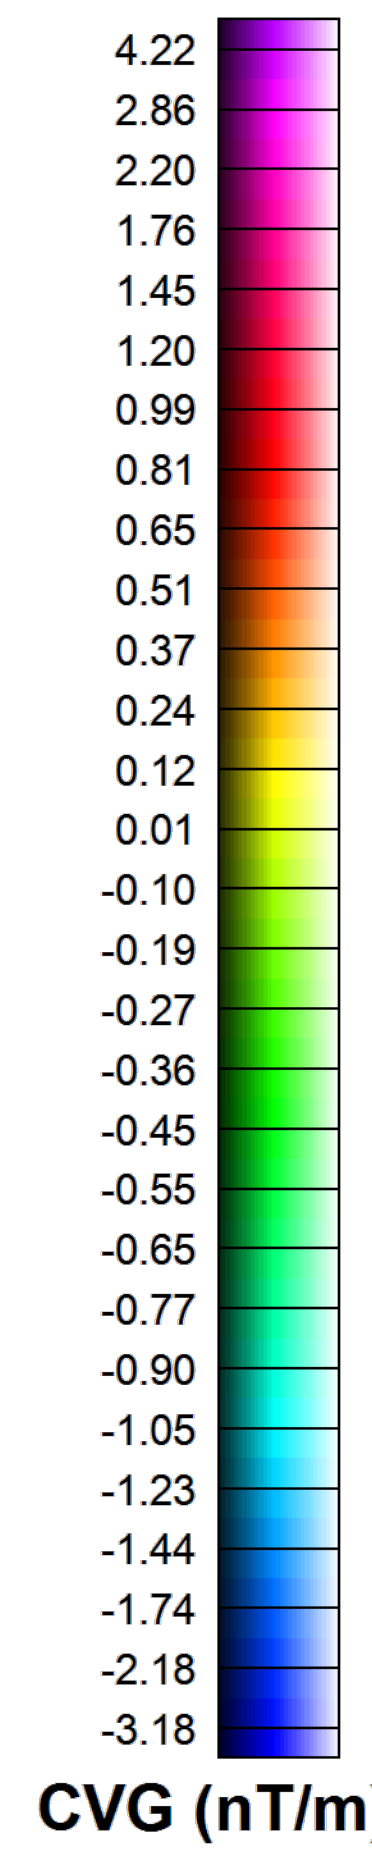

CVG (nT/m)

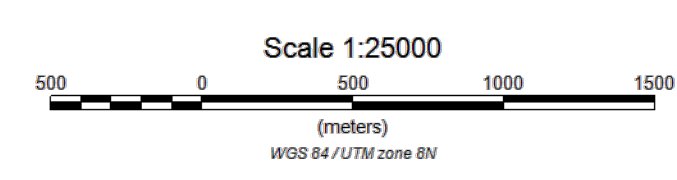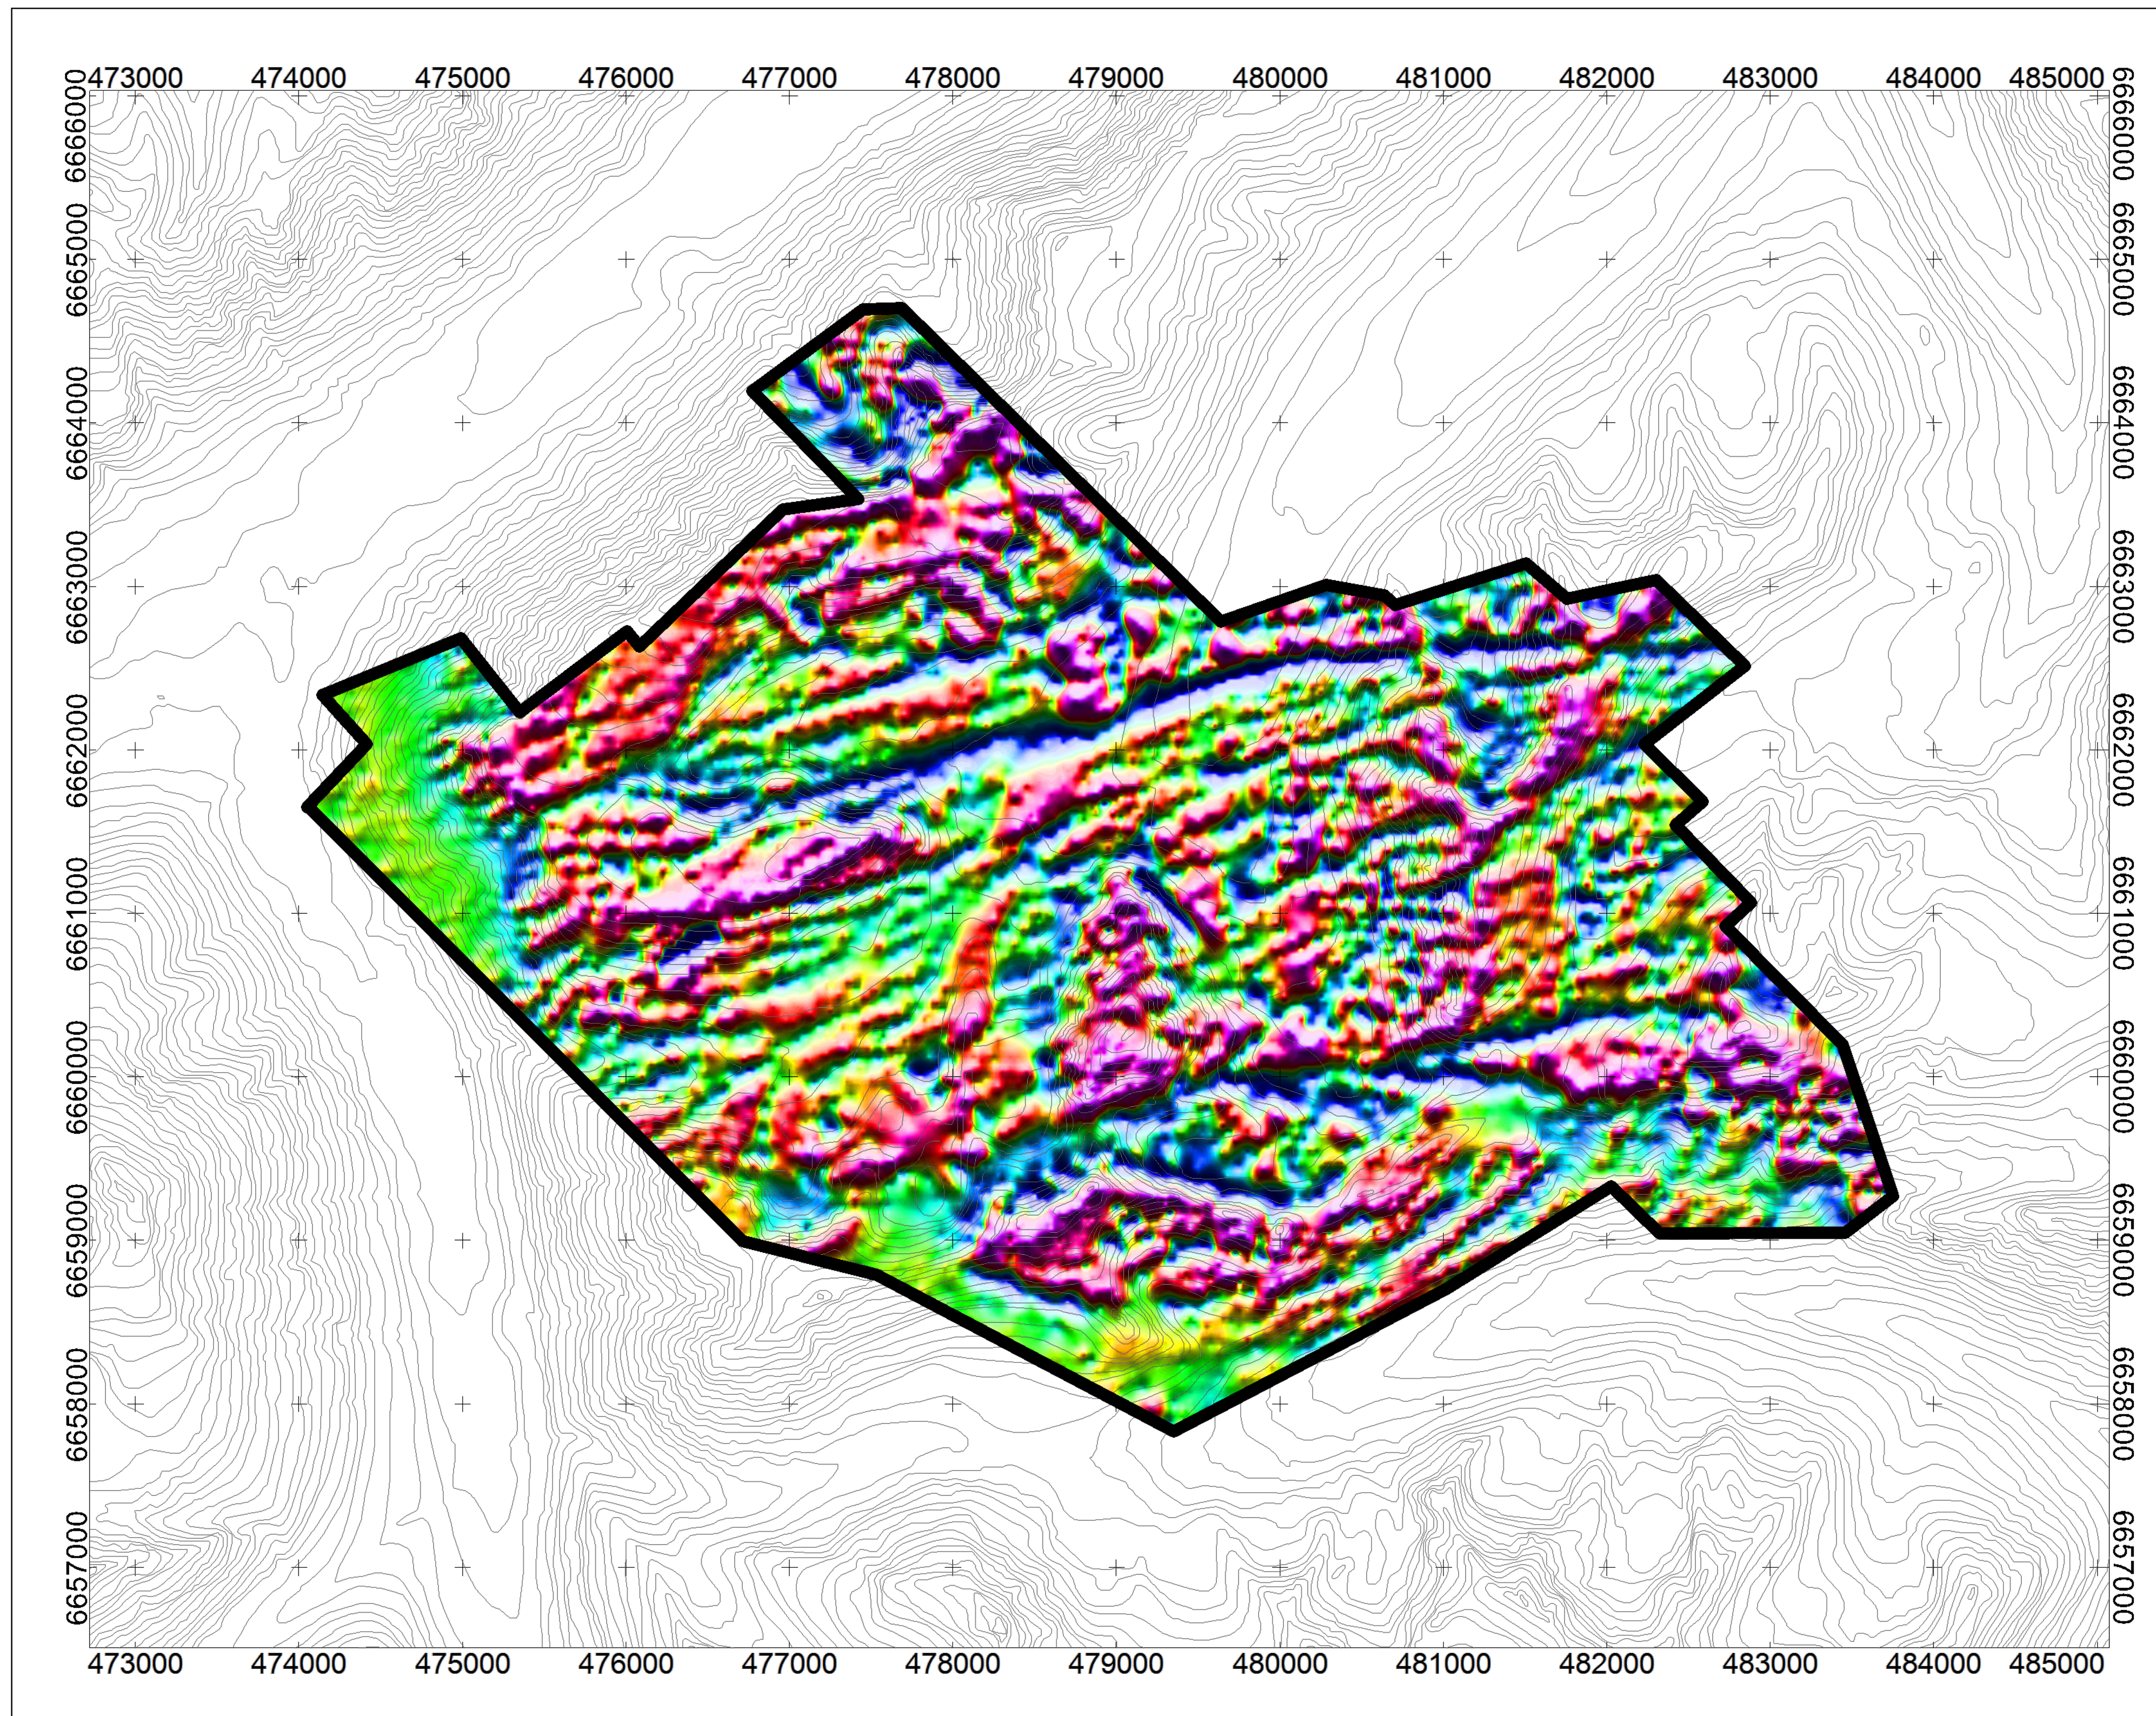

Pike-Warden Survey Block

Magnetic Map  
 Calculated Vertical Gradient

