

**Technical Information**  
 This map was compiled from data acquired during an airborne electromagnetic survey carried out by CGO utilizing a HELITEM™ Time Domain Electromagnetic (TDEM) system. The system was mounted on a Eurocopter AS350B3 helicopter (registration C-FR003) and was carried out between April 17<sup>th</sup> and April 20<sup>th</sup>, 2015. The aircraft flight elevation was maintained at a nominal 1000 m above ground level. Aircraft navigation used a 12 channel Novair dual frequency GPS. Post-flight differential corrections were subsequently applied to traverse flight path position. A workably mounted video camera was used to record images of the ground. The radar height was recorded ten times per second using a Sironix CS-2 cesium-vapor magnetometer.

**Survey Area Parameters**

Traverse line azimuth	45°/225°
Traverse line spacing	250 m
Te line azimuth	130°/130°
Te line spacing	1000 m
Aircraft nominal clearance	83 m
EM transmitter nominal clearance	35 m
Magnetic sensor nominal clearance	35 m
EM Receiver nominal clearance	63 m

**Electromagnetics**  
 The TDEM system operating at a base frequency of 30 Hz transmits a 4 ms line-reversing signal from a maximum 100 m horizontal loop mounted approximately 47.0 m below and 12.5 m behind the aircraft. This configuration provides a dipole moment of  $1.56 \times 10^7 \text{ Am}^2$ . The response of conductors in the subsurface is sampled 2048 times per half-wave cycle. Channels 1 and 2 electromagnetic data were recorded to a precision approximately 26.8 m above and 12.4 m from the transmitter loop. The EM system records data in a continuous stream for each of the three components. A 3-second tapered stack was used before adjusting the data as 30 time windows at a final recording rate of 10 Hz. The EM receiver directly measures the change in the magnetic field strength in the ground from which the secondary total magnetic field (B) is numerically integrated. High-altitude background sections from at the start and end of each flight above a tail-order removal of system drift.

**Electromagnetic System Specifications**

Base Frequency	30 Hz
Waveform	Half-sine wave
Pulse width	4 ms
Transmitter Area	768 m <sup>2</sup> (2 turns)
Transmitter Off time	12.5 ms
Transmitter Loop	30 m diameter
Transmitter Current	1300 A
Dipole moment (approximate)	$1.56 \times 10^7 \text{ Am}^2$ (BT-C)
Windowed data sampling rate	10 Hz
Receiver	3-component induction coil (X, Y, Z)
Measured response	Voltage (dBV)
Digital recording	All raw data channels (30 channels)
1 <sup>st</sup> off time channel	Channel 5 at ~4.169 ms after pulse turn on
Te-Te Configuration	Towed transmitter below towed receiver





**Apparent Conductivity**  
 The apparent conductivity values were derived from selected early, middle and late channels (6, 14 and 22) of the off-time signal, fitted to a homogeneous half-space model. This is performed using a look-up table that contains the response over a range of half-space conductivities and altimeter heights as depicted in the nomogram below.

**Electromagnetic Decay Constant**  
 Decay constant (tau) values are obtained by fitting the data from selected early, middle and late channel ranges (6 to 8, 14 to 17 and 22 to 25) of the off-time signal to a single exponential. The decay constant indicates the relative strength of the conductor. In terms of log space, the slope of the function will reflect the exponential decay rate of the transient field and therefore the strength of the conductivity. A slow rate of decay, reflecting a high conductivity, will be represented by a high decay constant value.

**Magnetic**  
 The magnetic field was sampled 10 times per second using a split-beam cesium vapour magnetometer (sensitivity = 0.005 nT) mounted on the transmitter loop below the aircraft. The magnetic field data at the transmitter location and traverse line is approximately 26.8 m above and 12.4 m from the transmitter loop. The levelled values were then interpolated to a 62.5 m grid. The International Geomagnetic Reference Field (IGRF) defined at a mean GPS altitude (1073.6 m) for a constant magnetic date (April 24<sup>th</sup>, 2015) was then removed. Removal of the IGRF, representing the magnetic field of Earth's core, produces a residual component related essentially to magnetizations within Earth's crust.

The first vertical derivative of the magnetic field is the rate of change of the magnetic field in the vertical direction. Computation of the first vertical derivative removes long wavelength features of the magnetic field and significantly improves the resolution of closely spaced and associated anomalies. A property of first vertical derivative maps is the coincidence of the zero-value contour with vertical contacts at high magnetic latitudes (Hood, 1965). The first vertical derivative of the magnetic field was calculated by the Fourier transform on the gridded total magnetic field with a grid cell size of 62.5 m.

**References**  
 Hood, P.J., 1965. Gradient measurements in aeromagnetic surveying. *Geophysics*, v. 30, p. 691-692.

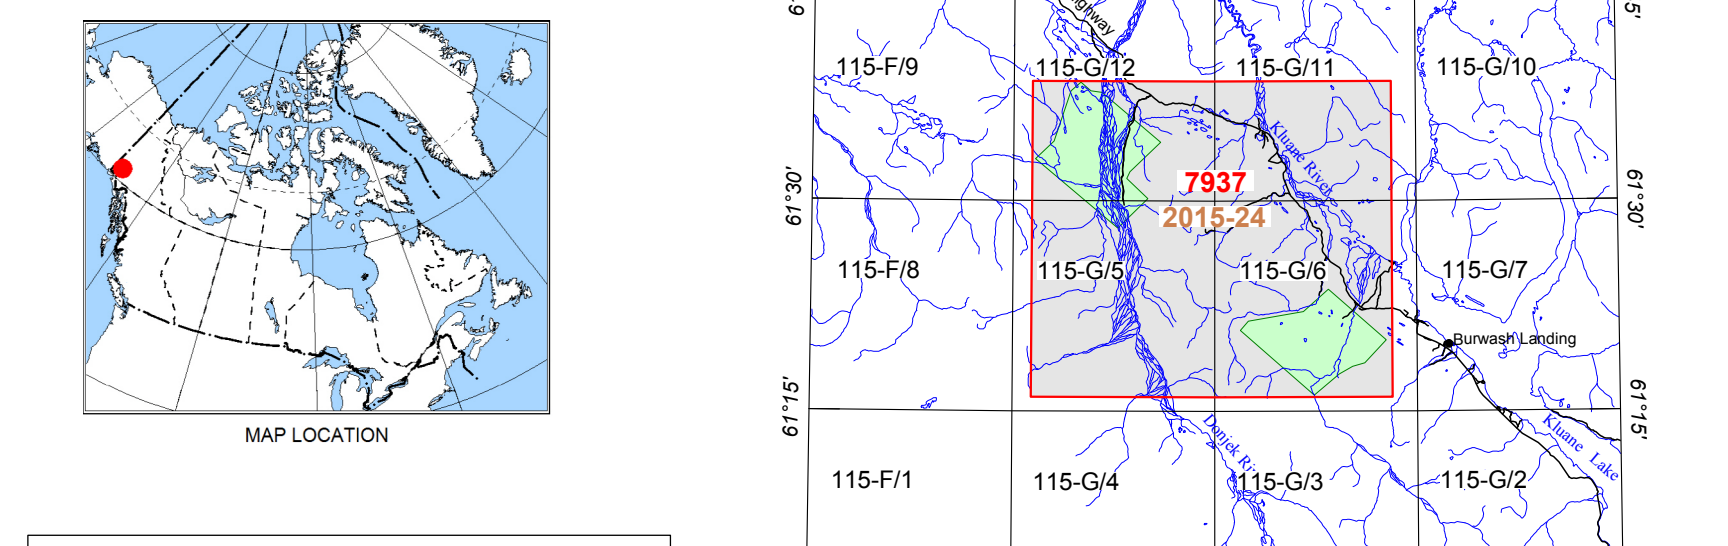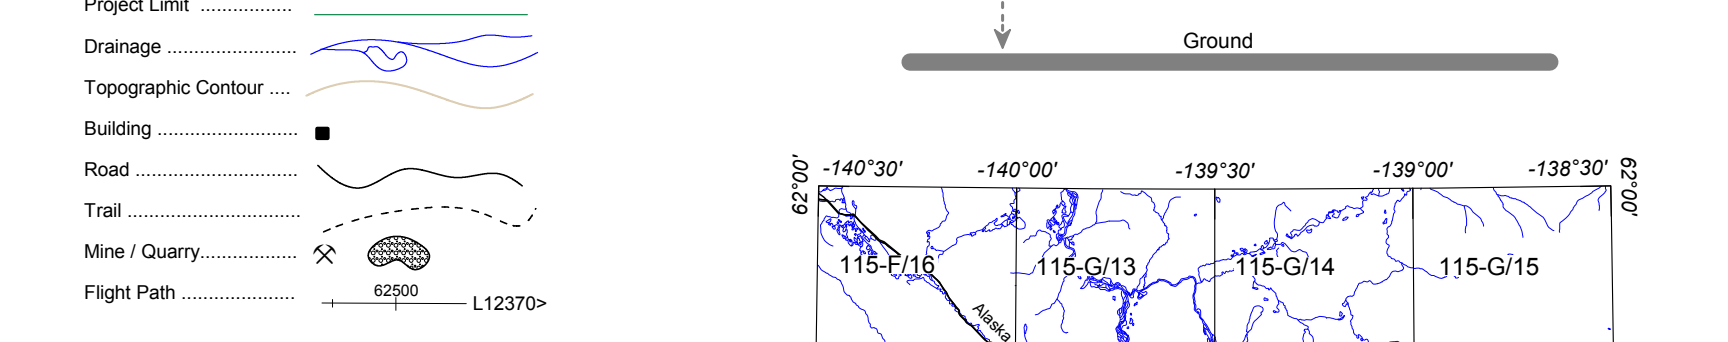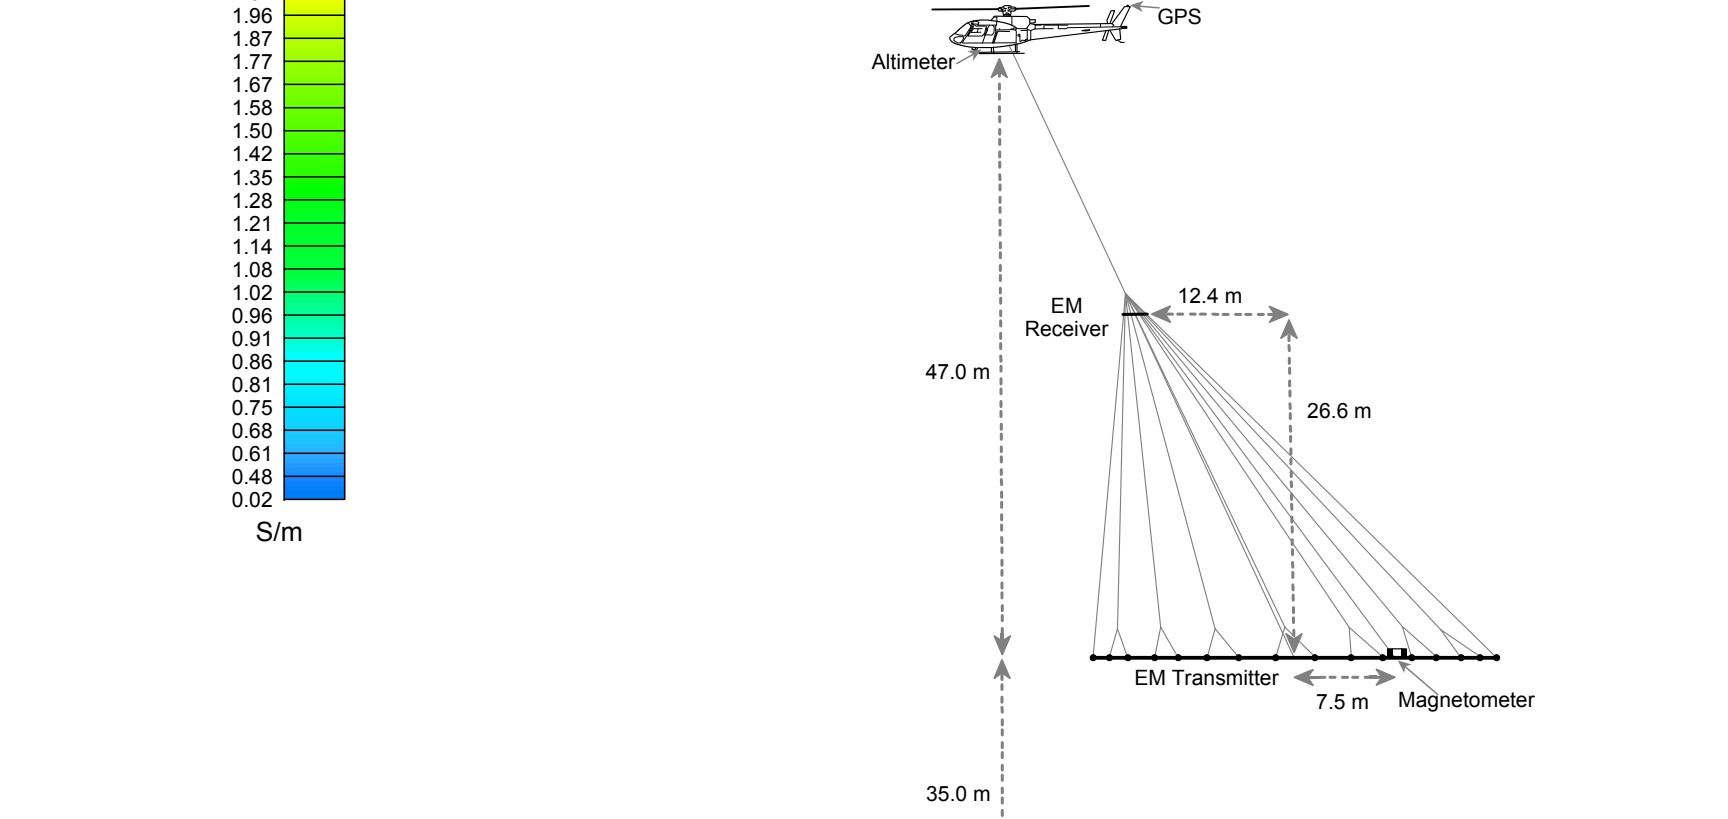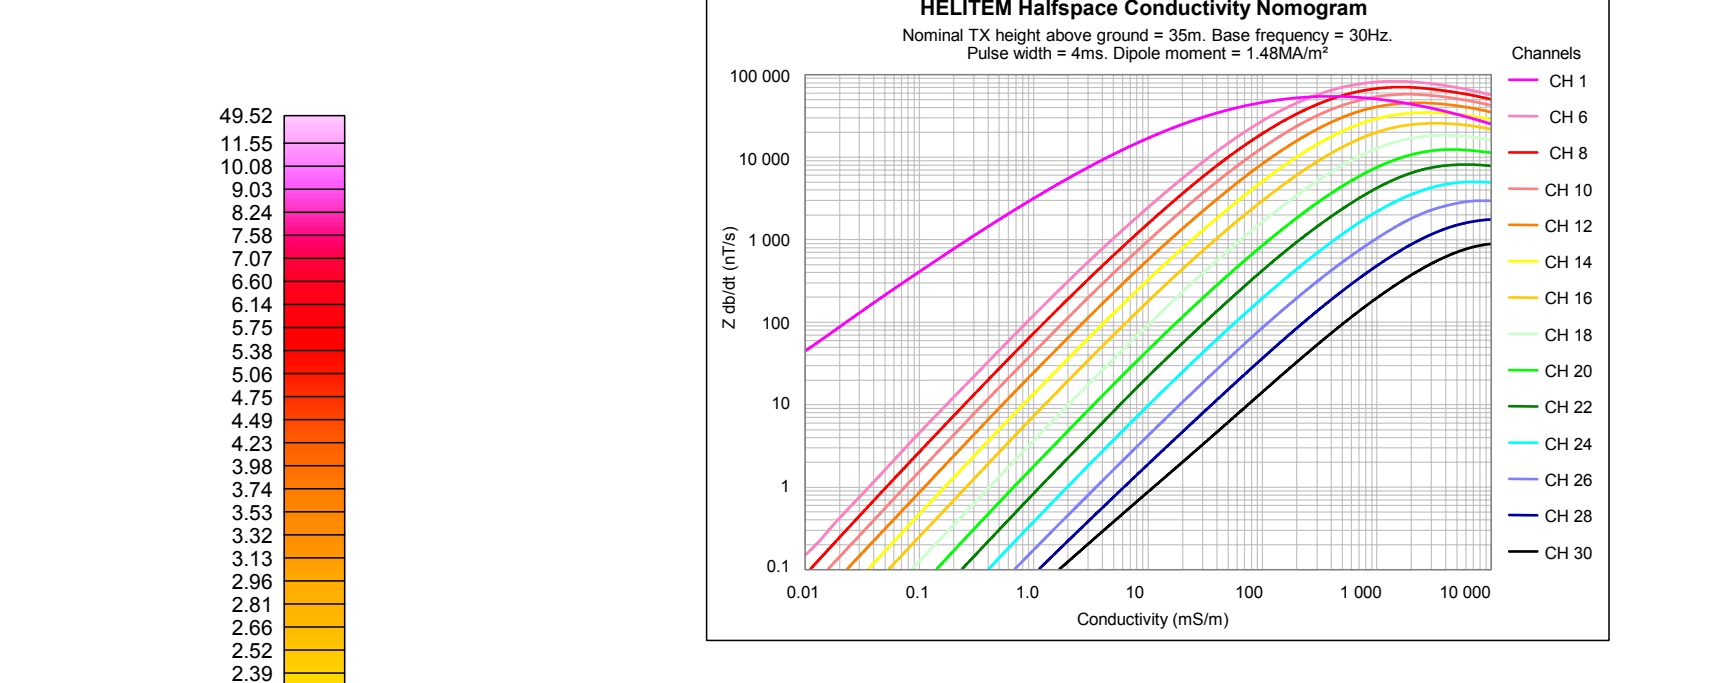

**Sheet Titles**  
 Sheet 1 Time Decay Constant (Tau-Z) - Early Channels (6 to 8)  
 Sheet 2 Time Decay Constant (Tau-Z) - Mid Channels (14 to 17)  
 Sheet 3 Time Decay Constant (Tau-Z) - Late Channels (22 to 25)  
 Sheet 4 Apparent Conductivity - Early Channel (6)  
 Sheet 5 Apparent Conductivity - Mid Channel (14)  
 Sheet 6 Apparent Conductivity - Late Channel (22)  
 Sheet 7 Residual Total Magnetic Field  
 Sheet 8 First Vertical Derivative of the Magnetic Field

The Klauene Lake West electromagnetic survey was jointly conceived and funded by the Yukon Geological Survey (YGS) and Klauene First Nation (KFN). YGS and KFN gratefully acknowledge the Strategic Initiative in Northern Economic Development Program of Northern Economic Development Canada as the source of its funding contribution. Natural Resources Canada generously provided survey oversight and data processing and produced the maps as part of the Geo-mapping for Exploration and Research (GEM) Program of the Earth Sciences Sector, Natural Resources Canada, for which YGS and KFN are both sincerely appreciative.

Digital versions of this map are available for free download through GEOSCAN (<http://www.geoscan.ca>). Corresponding digital profile and gridded data as well as similar data for adjacent airborne geophysical surveys can be downloaded, at no charge, from Natural Resources Canada's Decision Data Repository for Geophysical Data at [http://gdr.nrc.ca/geophysical\\_data/](http://gdr.nrc.ca/geophysical_data/). The same products are also available, for a fee, from the Geophysical Data Centre, Geological Survey of Canada, 615 Booth Street, Ottawa, Ontario K1A 0E8; Telephone: (613) 995-6326, email: [ifg@gsd.geoscan.ca](mailto:ifg@gsd.geoscan.ca)

**Authors: M. Coyle, F. Kies, O. Boulanger and D. Oneschuk**  
 Data acquisition and data compilation by CGO, Mississauga, Ontario  
 Project management and map production by the Geological Survey of Canada, Ottawa, Ontario  
 doi:10.4095/296969

GSC OPEN FILE 7937  
 YGS OPEN FILE 2015-24  
**KLAUENE LAKE WEST ELECTROMAGNETIC SURVEY**  
 YUKON  
 Parts of NTS 115-G/5, 6, 11 and 12  
**APPARENT CONDUCTIVITY**  
**EARLY CHANNEL (6)**  
 Scale 1:50 000  
 NAD 83 / UTM zone 7N  
 North American Datum 1983  
 © the Ministry of Natural Resources Canada, 2015  
 All rights reserved. No part of this publication may be reproduced without the prior written permission of the Minister of Natural Resources Canada.