

**Technical Information**  
 This map was compiled from data acquired during an airborne electromagnetic survey carried out by CGO using a HELITEM™ Time-Domain Electromagnetic (TDEM) system. The system was mounted on a Laseptec A23000 helicopter (registration G-PKMK) and was scanned out between April 17<sup>th</sup> and April 20<sup>th</sup>, 2015. The aircraft flight elevation was maintained at a nominal ground clearance of 120 m. A 12 channel Helium 400 kHz frequency GPS. Post-flight differential corrections were subsequently applied to finalize flight path position. A vertically mounted video camera was used to record images of the ground. The radar height was recorded for time and used for a quality check and the magnetic altimeter was recorded for time per second using a Sironia altimeter. The magnetic data were recorded 10 times per second using a Sironia CS-2 osmium-vapor magnetometer.

**Survey Area Parameters**

Transmitter	40°/225°
Transverse line spacing	250 m
Line spacing	1300/1100'
Line spacing	1300 m
Aircraft nominal clearance	83 m
EM Transmitter nominal clearance	35 m
Magnetic sensor nominal clearance	35 m
EM Receiver nominal clearance	63 m

**Electromagnetic System Specifications**

Base Frequency	30 Hz
Waveform	Half sine wave
Pulse width	4 ms
Transmitter Area	708 m <sup>2</sup> (2 turns)
Transmitter Current	13.0 A
Transmitter Loop	30 m diameter
Transmitter Current	1300 A
Loop moment (approximate)	1.84x10 <sup>6</sup> Am <sup>2</sup> (@1°C)
Windowed data sampling rate	10 Hz
Receiver	3-component induction coil (X, Y, Z)
Measured Response	Voltage (dBV)
Digital recording	All raw data channels (30 channels)
1 <sup>st</sup> off-time channel	Channel 5 at ~1.99 ms after pulse turn on
Tx-Rx Configuration	Towed transmitter below towed receiver





**Apparent Conductivity**  
 The apparent conductivity values were derived from selected early, middle and late channels (8, 14 and 22) of the off-time signal, fitted to a homogeneous half-space model. This is performed using a look-up table that contains the response over a range of half-space conductivities and altimeter heights as depicted in the nomogram below.

**Electromagnetic Decay Constant**  
 Decay constant (T<sub>10</sub>) values are obtained by fitting the data from selected early, middle and late channel ranges (8 to 9, 14 to 17 and 22 to 25) of the off-time signal to a single exponential. The decay constant indicates the relative strength of the conductor. In a semi-log space, the slope of the function will reflect the exponential decay rate of the transient field and therefore the strength of the conductivity. A slow rate of decay, reflecting a high conductivity, will be represented by a high decay constant value.

**Magnetics**  
 The magnetic field was sampled 10 times per second using a split-beam cesium vapour magnetometer (sensitivity = 0.005 nT) mounted on the transmitter loop towed below the aircraft. Differences in magnetic values at the intersection of control and traverse lines were analyzed to obtain a mutually levelled set of flight line magnetic data. The levelled values were then interpolated to a 62.5 m grid. The International Geomagnetic Reference Field (IGRF) defined as a mean GRS value (IGRF 6.0) for a constant mid-survey date (April 24<sup>th</sup>, 2015) was then removed. Removal of the IGRF, representing the magnetic field of Earth's core, produces a residual component related essentially to magnetization within Earth's crust.

The first vertical derivative of the magnetic field is the rate of change of the magnetic field in the vertical direction. Computation of the first vertical derivative removes long-wavelength features of the magnetic field and significantly improves the resolution of closely spaced and superposed anomalies. A property of first vertical derivative maps is the coincidence of zero-value contours with vertical contacts at high magnetic latitudes (Krook, 1965). The first vertical derivative of the magnetic field was calculated by fast Fourier transform on the gridded total magnetic field with a grid cell size of 62.5 m.

**References**  
 Hood, P.J., 1965. Gradient measurements in aeromagnetic surveying. Geophysics, v. 30, p. 891-902.

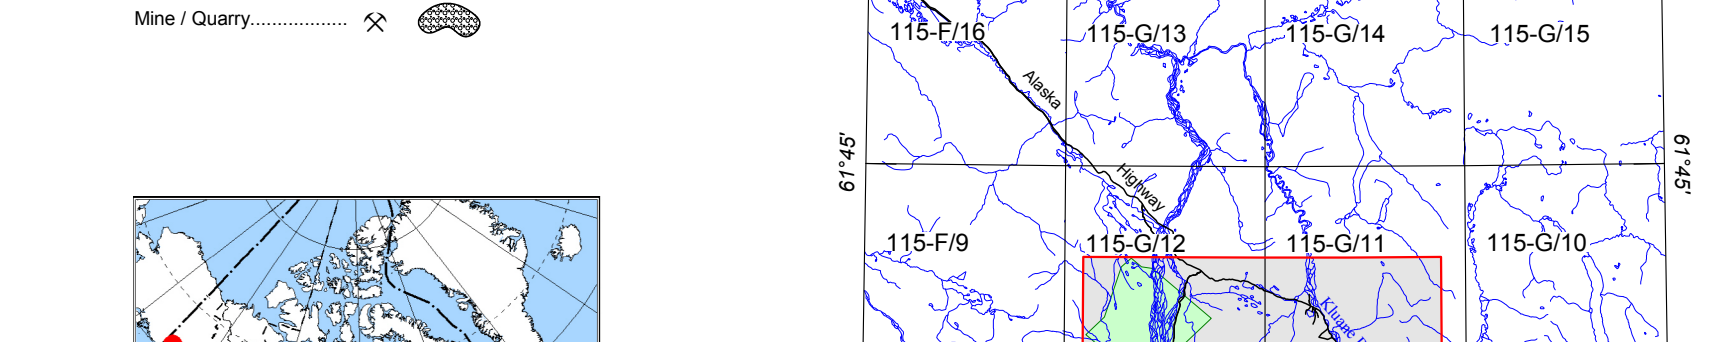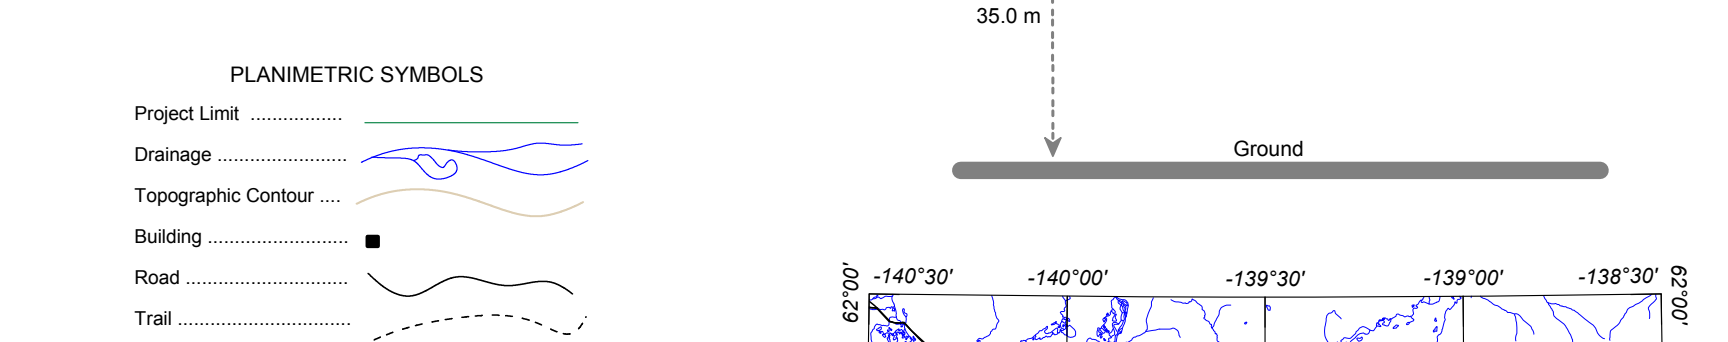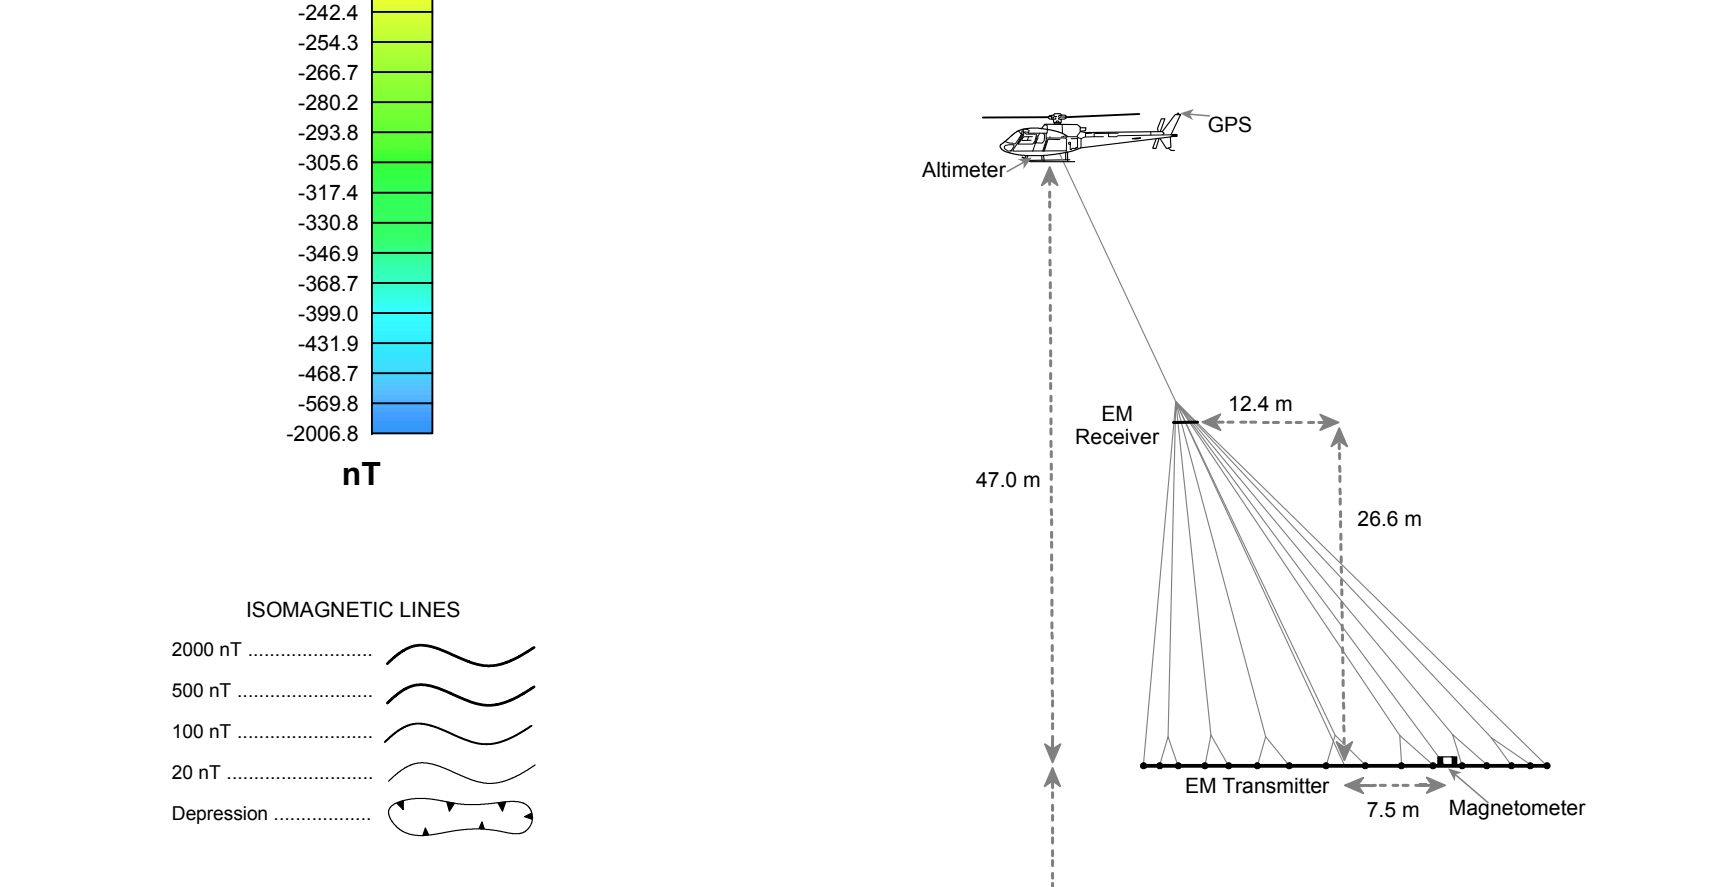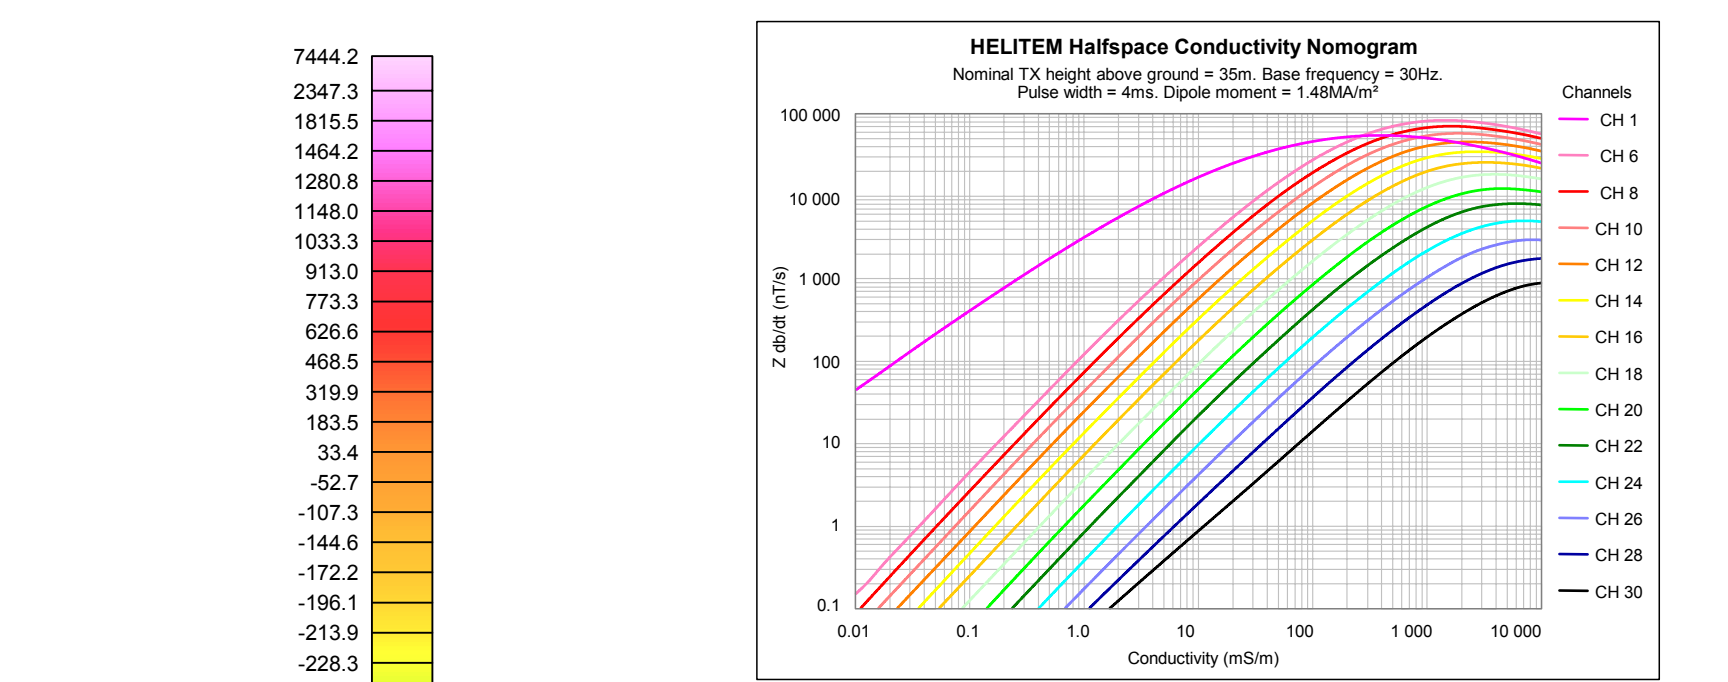

**Sheet Titles**

- Sheet 1 Time Decay Constant (Tau-2) - Early Channels (8 to 9)
- Sheet 2 Time Decay Constant (Tau-2) - Mid Channels (14 to 17)
- Sheet 3 Time Decay Constant (Tau-2) - Late Channels (22 to 25)
- Sheet 4 Apparent Conductivity - Early Channel (8)
- Sheet 5 Apparent Conductivity - Mid Channel (14)
- Sheet 6 Apparent Conductivity - Late Channel (22)
- Sheet 7 Residual Total Magnetic Field
- Sheet 8 First Vertical Derivative of the Magnetic Field

The Klauane Lake West electromagnetic survey was partly conceived and funded by the Yukon Geological Survey (YGS) and Klauane First Nation (KFN). YGS and KFN graciously acknowledge the Strategic Initiative in Northern Economic Development Canada as the source of the funding contribution. Natural Resources Canada generally provided survey oversight and data processing and produced the maps as part of the Geo-mapping for Energy and Minerals (GEM) Program of the Earth Sciences Sector, Natural Resources Canada. Natural Resources Canada (NRC) and KFN are both equally appreciative.

Digital versions of this map are available for free download through GEOCAN (<http://www.geocan.ca>). Corresponding digital profile and gridded data as well as similar data for adjacent airborne geophysical surveys can be downloaded, at no charge, from Natural Resources Canada's Geoscientific Data Repository for Geophysical Data at <http://192.168.1.100/geodata/>. The same products are also available for a fee from the Geophysical Data Centre, Geological Survey of Canada, 615 Booth Street, Ottawa, Ontario K1A 0S9. Telephone: (613) 995-5328, email: [fgf@geogdata.nrcan.ca](mailto:fgf@geogdata.nrcan.ca)

**Authors:** M. Coyle, F. Kiss, O. Boulanger and D. Oneschuk  
 Data acquisition and data compilation by CGO, Mississauga, Ontario.  
 Project management and map production by the Geological Survey of Canada, Ottawa, Ontario.  
 doi:10.4095/206969

GSC OPEN FILE 7937  
 YGS OPEN FILE 2015-24  
**KLAUANE LAKE WEST ELECTROMAGNETIC SURVEY**  
 YUKON  
 Parts of NTS 115-G15, 6, 11 and 12  
**RESIDUAL TOTAL MAGNETIC FIELD**  
 Scale 1:50 000  
 1 2 3 Kilometres  
 North American Datum 1983  
 UTM Zone 11N  
 UTM Projection  
 as represented by the Minister of Natural Resources Canada, 2015  
 Topographic Data from Natural Resources Canada