

Technical Information


This map was compiled from data acquired during an airborne electromagnetic survey conducted by the Geomatics Ltd. using a VTEM Plus™ Two-Dimensional Electromagnetic (TDEM) system. The system was mounted on a Eurocopter AS350 B3 helicopter. The helicopter flight altitude was maintained at an average ground clearance of 150 m with an average speed of 90 km/h. The flight navigation used a 12 channel Novatel dual frequency GPS. Post-flight differential corrections were applied to the flight path. A vertically mounted loop antenna was used to measure the magnetic field. The receiver antenna was mounted in the fuselage and used a 100 mHz precision pressure transducer. The magnetic field data was recorded 10 times per second using the Geomatics Ltd. custom magnetometers separated by 12.5 m.

Electromagnetic System Specifications:

Base Frequency	30 Hz
Transmitter Pulse width	5.41 ms
Transmitter Area/Effective Area	530.9 m ² / 2123.7 m ²
Transmitter Current	111.7 mA
Transmitter Loop diameter	26 m
Transmitter Current	221 A
Receiver current (approximately)	475.00 A/m ² (4 turns)
Receiver data sampling rate	10 Hz
Receiver	3 component induction coil (Z, X, Y)
Z and X coil diameter (turns)	1.2 m / 100 turns & 0.30 m (50 turns)
Label Antenna	Magnetic Dipole 1 & 2
Measured Response	20.48 contours
Digital recording	20.48 contours
Channel #	15 - 30
1° off zone Z channel	after pulse turn off

Electromagnetic System Specifications:

Base Frequency	30 Hz
Transmitter Pulse width	5.41 ms
Transmitter Area/Effective Area	530.9 m ² / 2123.7 m ²
Transmitter Current	111.7 mA
Transmitter Loop diameter	26 m
Transmitter Current	221 A
Receiver current (approximately)	475.00 A/m ² (4 turns)
Receiver data sampling rate	10 Hz
Receiver	3 component induction coil (Z, X, Y)
Z and X coil diameter (turns)	1.2 m / 100 turns & 0.30 m (50 turns)
Label Antenna	Magnetic Dipole 1 & 2
Measured Response	20.48 contours
Digital recording	20.48 contours
Channel #	15 - 30
1° off zone Z channel	after pulse turn off

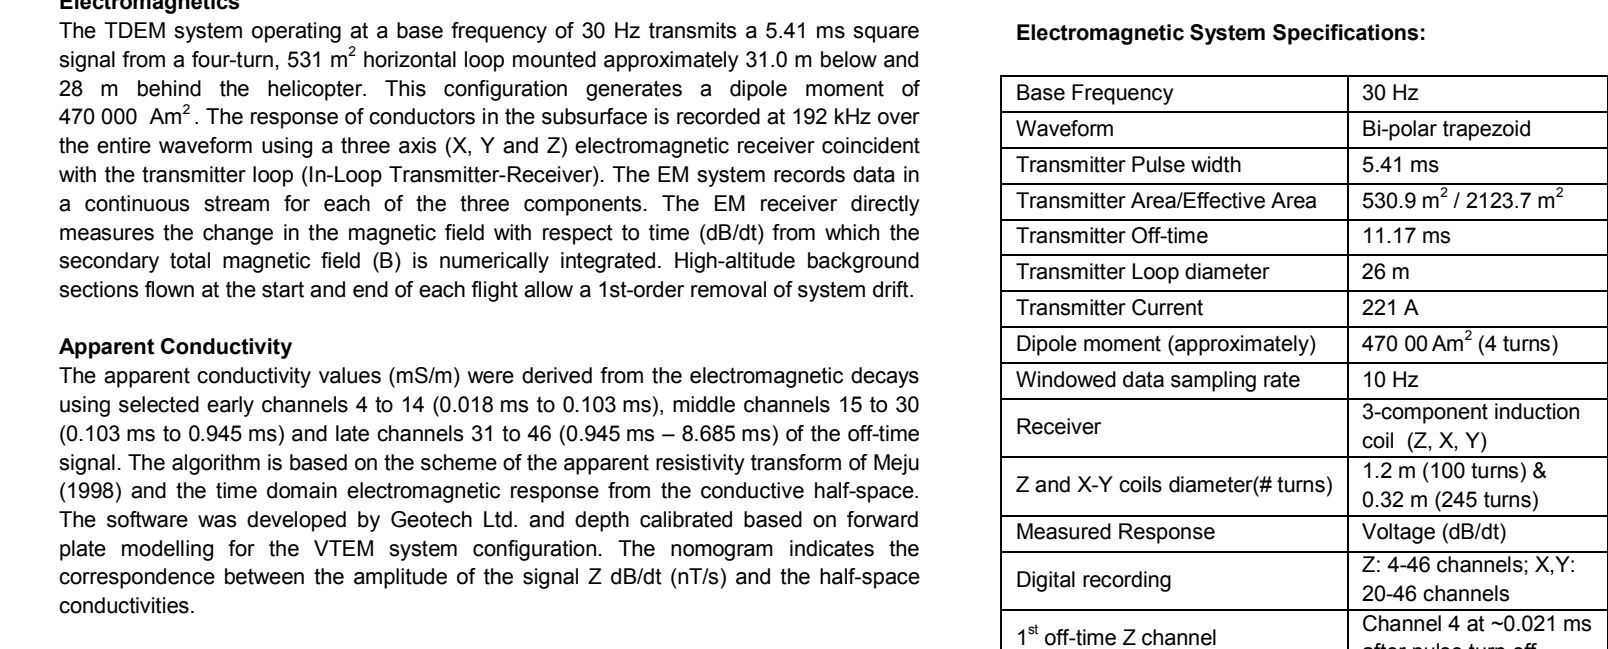

Electromagnetic Decay Constant

Decay constant (tau) values are obtained by fitting the data from selected early channels to a (0.103 ms - 0.103 ms) middle channel to (0.103 ms - 0.103 ms) and late channels to (0.945 ms - 0.945 ms) of the off-line signal at a single exponential in time space. The slope of the function will reflect the exponential decay rate of the transient field and, therefore, the strength of the conductivity. A slow rate of decay, reflecting a high conductivity, will be represented by a high decay constant value.

Magnetics

The magnetic field was sampled 10 times per second using a cesium vapour magnetometer (sensitivity = 2.00 nT) mounted on above the EM transmitter loop. Differences in magnetic values at the intersections of contour and traverse lines were analysed to obtain a locally levelled set of flight line magnetic data. The levelled data were then interpolated to a 50 m grid. The International Geomagnetic Reference Field (IGRF) defined at a mean GPS altitude of 150 m for a constant mid-survey date May 1, 2010, was then removed. Removal of the IGRF, representing the magnetic field of Earth's core, produces a residual component related essentially to magnetization within Earth's crust.

The first vertical derivative of the magnetic field is the rate of change of the magnetic field in the vertical direction. Computation of the first vertical derivative removes long-wavelength features of the magnetic field and significantly improves the resolution of shallow and steeply bedded structures. A property of the first vertical derivative map is the coincidence of the zero-value contour with vertical contacts at high magnetic latitudes (above 60°N). The first vertical derivative of the magnetic field was calculated using the fast Fourier transform on the gridded total magnetic field with a grid cell size of 50 m.

Digital versions of this map are available for free download through GEOCAN (http://geocan.nrc.ca). Copying, reprinting, and posting data as well as other data for adjacent airborne geophysical surveys can be downloaded at no charge from Natural Resources Canada's Geomatics Data Repository for Geophysical Data at http://gdpr.nrc.ca/ghb/ghb_e.html. The same products are also available, for a fee, from the Geomatics Data Centre, Geological Survey of Canada, 601 Booth Street, Ottawa, Ontario K1A 0E8. Telephone: (613) 993-5326, email: ghb@geocan.nrc.ca.

Copies of this map may also be obtained from the Yukon Geological Survey, Energy, Mines and Resources, Government of Yukon, P.O. Box 2702, 66-102, Whitehorse, Yukon, Y1A 2C6. Telephone: (867) 667-3201, email: geology@yuk.ca, website: http://www.yukon.ca/ghb/ghb_e.html.


Acknowledgements:

The authors thank the Geomatics Ltd. field crew, Geoffrey Plawski and Tanya Hargrave for their cooperation. We thank Douglas Ormrod (GSC) for his cartographic design expertise. The authors thank Warner Miles and Mark Pilkington for helpful comments and suggestions to improve the maps.

References:


Hood, P.J., 1985. Gradient measurements in aeromagnetic surveying. *Geophysics*, v. 50, p. 891-892.

Mey, M.A., 1968. A simple method of transient electromagnetic data analysis. *Geophysics*, v. 43, p. 425-432.

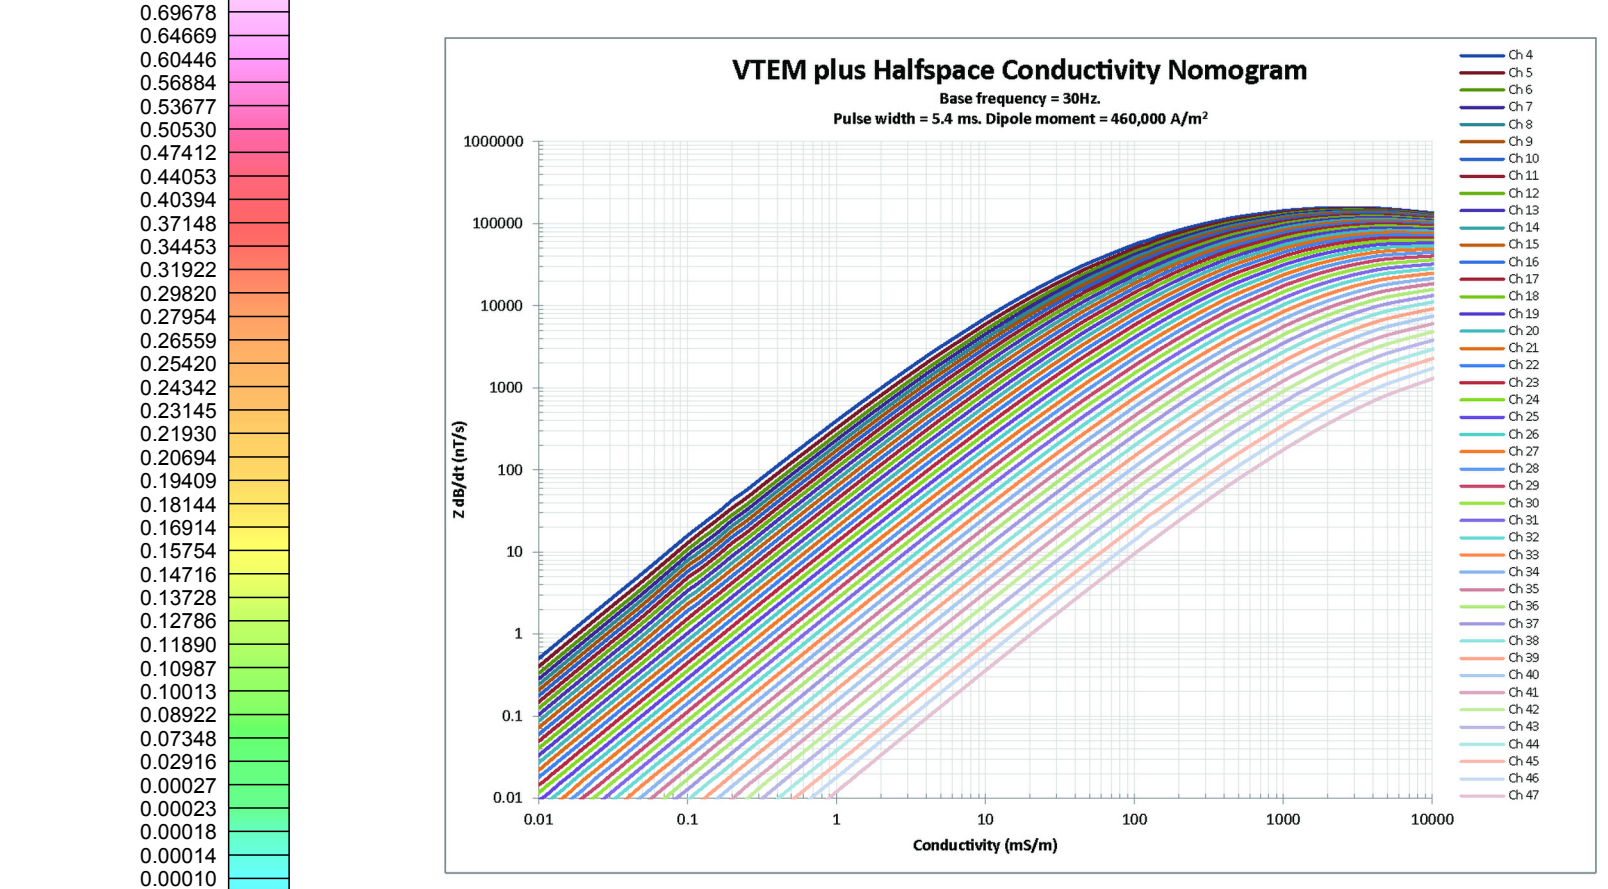

PLANIMETRIC SYMBOLS

Drainage	Sheet 1: Time Decay Constant (Tau-Z) - Early Channels 4 - 14 (0.010 ms - 0.103 ms)
Topographic Contour	Sheet 2: Time Decay Constant (Tau-Z) - Mid Channels 15 - 30 (0.103 ms - 0.945 ms)
Contour Interval: 20 m	Sheet 3: Time Decay Constant (Tau-Z) - Late Channels 31 - 46 (0.945 ms - 8.085 ms)
Building	Sheet 4: Apparent Conductivity - Early Channels 4 - 14 (0.010 ms - 0.103 ms)
Trail	Sheet 5: Apparent Conductivity - Mid Channels 15 - 30 (0.103 ms - 0.945 ms)
Flight Path	Sheet 6: Apparent Conductivity - Late Channels 31 - 46 (0.945 ms - 8.085 ms)
Project Limit	Sheet 7: First Vertical Derivative of the Magnetic Field
	Sheet 8: Electromagnetic Interpretation

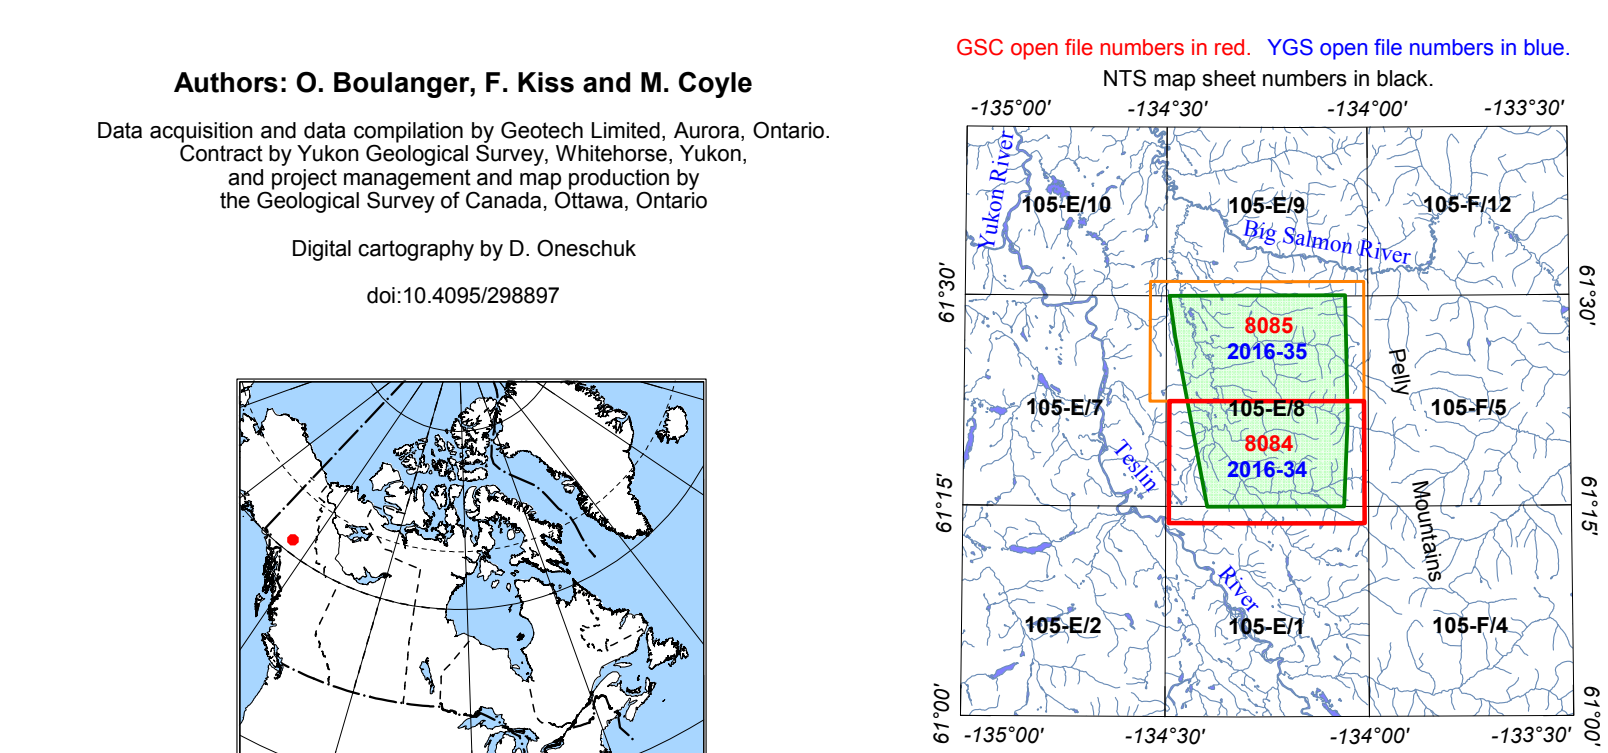

Authors: O. Boulanger, F. Kiss and M. Coyle

Date acquisition and data compilation by Geomatics Limited, Aurora, Ontario.
 Contouring and map production by Geomatics Limited, Aurora, Ontario.
 and project management and map production by the Geological Survey of Canada, Ottawa, Ontario.

Digital cartography by D. Ormrod

doi:10.4095/288987

GSC OPEN FILE 8084 / YGS OPEN FILE 2016-34
ELECTROMAGNETIC SURVEY OF THE LIVINGSTONE CREEK AREA
 Parts of NTS 105-E11 and 8
**TIME DECAY CONSTANT (TAU-Z)
 MID CHANNELS 15 - 30 (0.103 ms - 0.945 ms)**
 Scale 1:20 000

Map projection: Universal Transverse Mercator, zone 8. World Geodetic System 1984.
 © Her Majesty the Queen in Right of Canada, as represented by the Minister of Natural Resources, 2016.
 Topographic data from Natural Resources Canada
 Contour Interval: 20 metres

OPEN FILE / DOSSIER PUBLIC 8084 GEOLOGICAL SURVEY OF CANADA COMMISSION GEOLOGIQUE DU CANADA 2016 Sheet 2 of 8 / Feuille 2 de 8	OPEN FILE / DOSSIER PUBLIC 2016-34 YUKON GEOLOGICAL SURVEY COMMISSION GEOLOGIQUE DU YUKON 2016 Sheet 2 of 8 / Feuille 2 de 8
--	--

Recommended citation
 Boulanger, O., Kiss, F. and Coyle, M., 2016.
 Electromagnetic Survey of the Livingstone Creek Area, Yukon.
 Parts of NTS 105-E11 and 8.
 Geological Survey of Canada, Open File 8084.
 Yukon Geological Survey Open File 2016-34.
 Scale 1:20,000. doi:10.4095/288987