

Survey Area Parameters:

Parameter	90°
Traverse the south	200 m
Traverse the north	200 m
Traverse the east	200 m
Traverse the west	200 m
Traverse the south	200 m
Traverse the north	200 m
Traverse the east	200 m
Traverse the west	200 m
Traverse the south	200 m
Traverse the north	200 m
Traverse the east	200 m
Traverse the west	200 m

Electromagnetic System Specifications:

Base Frequency	30 Hz
Waveform	Bi-polar trapezoid
Transmitter Pulse width	5.41 ms
Transmitter Area/Effective Area	530.9 m ² / 2123.7 m ²
Transmitter Current	111.7 A
Transmitter Loop diameter	26 m
Transmitter Current	221 A
Current moment (approximately)	4750.00 A·m ² (4 turns)
Windward data sampling rate	10 Hz
Receiver	3-component induction coil (Z, X, Y)
Z and X coil diameter (turns)	1.2 m (100 turns) & 0.30 m (50 turns)
Measured Response	Voltage (dBu)
Digital recording	2 x 24-bit/100 kHz, 2 x 24-bit/100 kHz
1° off zone Z channel	Channeled at 1021 ms after pulse turn off
1° off zone X channel	In-loop 14 Hz

Electromagnetic:
 The TEM system operating at a base frequency of 30 Hz transmits a 0.41 ms square pulse from a 26 m horizontal loop mounted approximately 10 m above and 20 m behind the helicopter. This configuration generates a dipole moment of 4750.00 A·m². The receiver consists of the induction coil and the induction coil connected in a series with a 100 ohm resistor. The EM system records data in a continuous stream for each of the three components. The EM receiver directly measures the change in the magnetic field induced by the EM pulse from which the secondary total magnetic field (B) is numerically integrated. High-precision background magnetic field (B₀) is measured at the start and end of each flight along a helicopter removal of system drift.

Apparent Conductivity:
 The apparent conductivity values (mS/m) were derived from the electromagnetic decay using the early channels 4 to 14 (0.018 ms to 0.103 ms), middle channels 15 to 20 (0.103 ms to 0.345 ms) and late channels 21 to 45 (0.345 ms to 0.885 ms) of the off-time signal. The algorithm is based on the spectrum of the apparent resistivity transfer of 1950 and the one current electromagnetic response from the conductive half-space. The software was developed by Geosoft Ltd. and depth calculated based on forward plane modeling for the VTEM system configuration. The program indicates the correspondence between the amplitude of the signal Z dBu (mV) and the half-space conductivity.

Electromagnetic Decay Constant:
 Decay constant (tau) values are obtained by fitting the data from selected early channels 4 to 14 (0.018 ms to 0.103 ms), middle channels 15 to 20 (0.103 ms to 0.345 ms) and late channels 21 to 45 (0.345 ms to 0.885 ms) of the off-time signal at a single experiment. In some cases, the slope of the function will reflect the exponential decay rate of the transient field and, therefore, the strength of the conductivity. A size rate of decay reflecting a high conductivity will be represented by a high decay constant value.

Magnetics:
 The magnetic field was sampled 10 times per second using a cesium vapour magnetometer (accuracy = ±0.001 nT) mounted on above the EM transmitter loop. Differences in magnetic values at the intersections of control and traverse lines were analyzed to obtain a nearly levelled set of flight line magnetic data. The levelled data were then interpolated to a 50 m grid. The International Geomagnetic Reference Field (IGRF) defined at a mean GPS altitude (1215 m) for a constant mid-survey date (May 1, 2010) was then removed. Removal of the IGRF, representing the magnetic field of Earth's core, produces a residual component related essentially to magnetization within Earth's crust.


The first vertical derivative of the magnetic field is the rate of change of the magnetic field in the vertical direction. Comparison of the first vertical derivative removes long-wavelength features of the magnetic field and significantly improves the resolution of shallow and steeply bedded or folded magnetic data. The levelled data were then interpolated to a 50 m grid. The International Geomagnetic Reference Field (IGRF) defined at a mean GPS altitude (1215 m) for a constant mid-survey date (May 1, 2010) was then removed. Removal of the IGRF, representing the magnetic field of Earth's core, produces a residual component related essentially to magnetization within Earth's crust.

Digital versions of this map are available for free download through GEOCAN (http://www.geocan.ca). Corresponding vector contour and gridded data as well as earlier data for adjacent airborne geophysical surveys can be downloaded, at no charge, from the Natural Resources Canada Geospatial Data Repository for Geophysical Data at <http://www.gdp.nrc.ca/geodata/2016/04/01/>. The same products are also available, for a fee, from the Geospatial Data Centre, Geological Survey of Canada, 601 Booth Street, Ottawa, Ontario K1A 0E8. Telephone: (613) 993-5326, email: info@geospatial.gc.ca.

Copies of this map may also be obtained from the Yukon Geological Survey, Energy, Mines and Resources, Government of Yukon, P.O. Box 2702, 66-010, Whitehorse, Yukon, Y1A 2C6. Telephone: (867) 667-3201, email: geology@gnw.yk.ca, website: <http://www.gsc.yk.ca>.

Acknowledgments:
 The authors thank the Geosoft Ltd. field crew, Geoffrey Plawiec and Tanya Hoggins for their cooperation. We thank Douglas Oleschak (GSC) for his catastrophic design expertise. The authors thank Warner Miles and Mark Pilkington for helpful comments and suggestions to improve the maps.


References:
 Hood, P.J., 1985. Gradient measurements in aeromagnetic surveying. Geophysics, v. 50, p. 891-892.
 May, M.A., 1968. A simple method of transient electromagnetic data analysis. Geophysics, v. 43, p. 425-430.

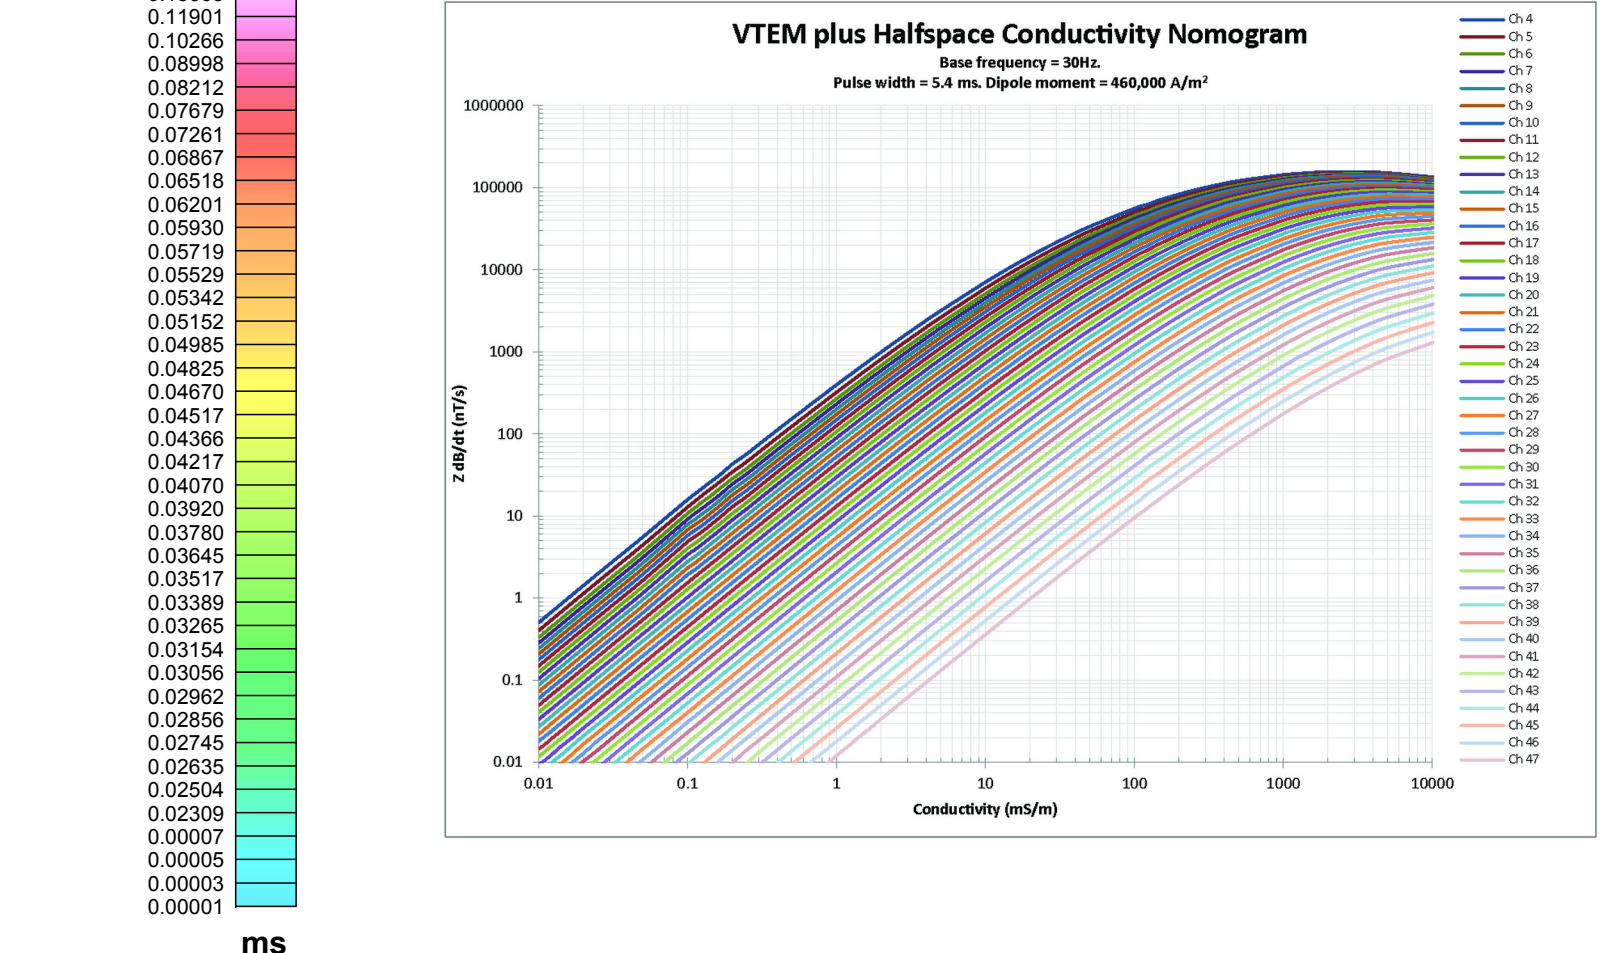

PLANIMETRIC SYMBOLS

Drainage	Sheet 1: Time Decay Constant (TAU-Z) - Early Channels 4 - 14 (0.018 ms - 0.103 ms)
Topographic Contours	Sheet 2: Time Decay Constant (TAU-Z) - Mid Channels 15 - 20 (0.103 ms - 0.345 ms)
Contour Interval - 20 m	Sheet 3: Time Decay Constant (TAU-Z) - Late Channels 21 - 45 (0.345 ms - 0.885 ms)
Building	Sheet 4: Apparent Conductivity - Early Channels 4 - 14 (0.018 ms - 0.103 ms)
Tail	Sheet 5: Apparent Conductivity - Mid Channels 15 - 20 (0.103 ms - 0.345 ms)
Flight Path	Sheet 6: Apparent Conductivity - Late Channels 21 - 45 (0.345 ms - 0.885 ms)
Project Limit	Sheet 7: First Vertical Derivative of the Magnetic Field
	Sheet 8: Electromagnetic Interpretation

Authors: O. Boulanger, F. Kiss and M. Coyle
 Date acquisition and data completion by Geosoft Limited, Aurora, Ontario.
 Contouring from Geosoft, Whitehorse, Yukon.
 Map projection and map production by the Geological Survey of Canada, Ottawa, Ontario.
 Digital cartography by D. Oleschak
 doi:10.4095/298987

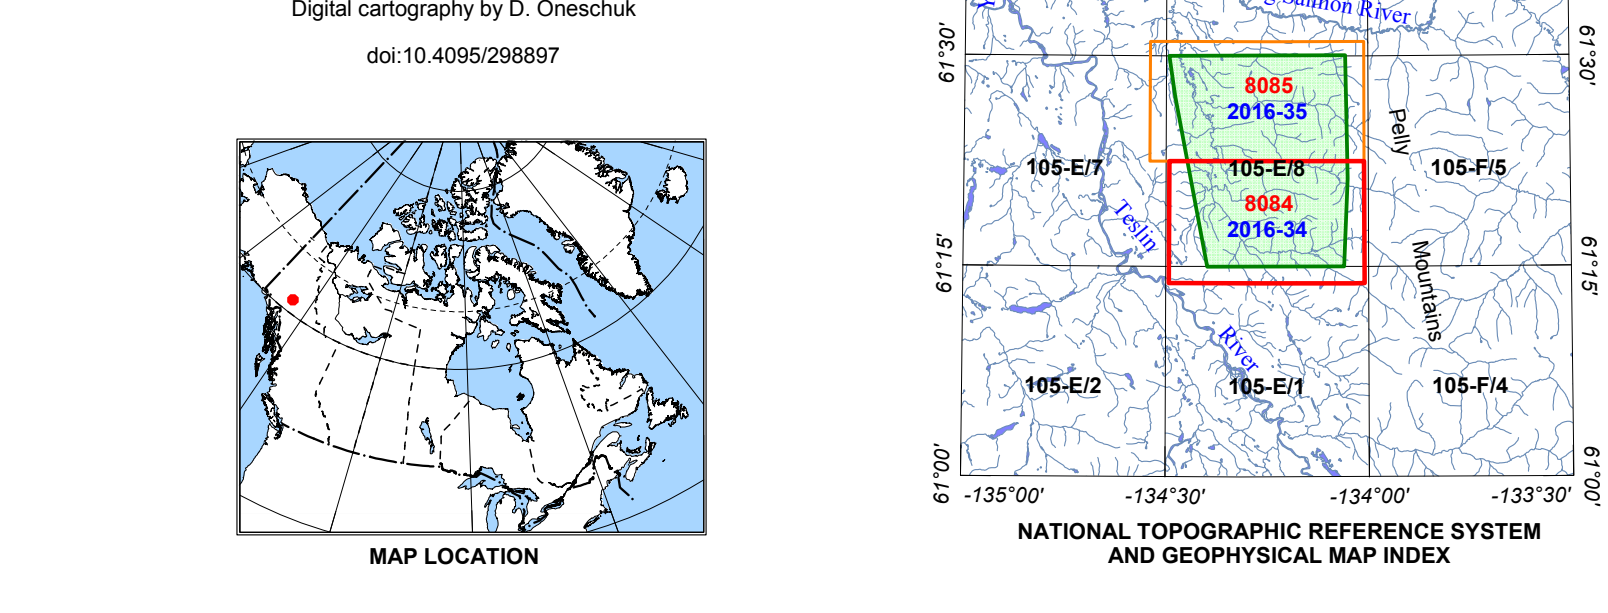

GSC OPEN FILE 8084 / YGS OPEN FILE 2016-34
ELECTROMAGNETIC SURVEY OF THE LIVINGSTONE CREEK AREA
 YUKON
 Parts of NTS 105-E1 and 8
**TIME DECAY CONSTANT (TAU-Z)
 EARLY CHANNELS 4 - 14 (0.018 ms - 0.103 ms)**
 Scale 1:20 000
 Map projection: Universal Transverse Mercator, zone 8. World Geodetic System 1984.
 © Her Majesty the Queen in Right of Canada, as represented by the Minister of Natural Resources, 2016.
 Topographic data from Natural Resources Canada
 Contour Interval: 20 metres

<p>OPEN FILE / DOSSIER PUBLIC 8084 GEOLOGICAL SURVEY OF CANADA COMMISSION GEOLOGIQUE DU CANADA 2016 Sheet 1 of 8 / Feuille 1 de 9</p>	<p>Publications in this series have not been edited. They are released as furnished by the author. Les publications de cette série ne sont pas révisées. Elles sont publiées telles qu'elles sont fournies par l'auteur.</p>	<p>OPEN FILE / DOSSIER PUBLIC 2016-34 YUKON GEOLOGICAL SURVEY COMMISSION GEOLOGIQUE DU YUKON 2016 Sheet 1 of 8 / Feuille 1 de 9</p>
---	--	---

Recommended citation:
 Boulanger, O., Kiss, F. and Coyle, M., 2016. Electromagnetic Survey of the Livingstone Creek Area, Yukon. Parts of NTS 105-E1 and 8. Geological Survey of Canada, Open File 8084; Yukon Geological Survey Open File 2016-34; Scale 1:20,000. doi:10.4095/298987